


informasi produk

ZXC New Material Technology Co ., Ltd. High weather resistant [ASA Synthetic Resin Roof Tile](#) on Sale

Nama Produk	Spanish Style ASA Roof Tile
Brand	ZXC
Tempat asal	Foshan city,Guangdong province,China(Mainland)
Material	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
Guarantee	25 years
Certification	ISO9001 / SGS / CE / Test Report
Minimum Order Quantity	100 square meter
Masa penghantaran	1x20GP for 6 days,1x40GP for 7 days
Keupayaan bekalan	We have 8 produce lines,about 13500 square meter every day
Terma pembayaran	T/T , firstly pay 30% deposit,before loading container pay rest of payment
penghantaran	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Package	Pallet or PE bag
Port	Guangzhou / Shenzhen / Foshan
Application	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc

25
Quality
Guaranteed



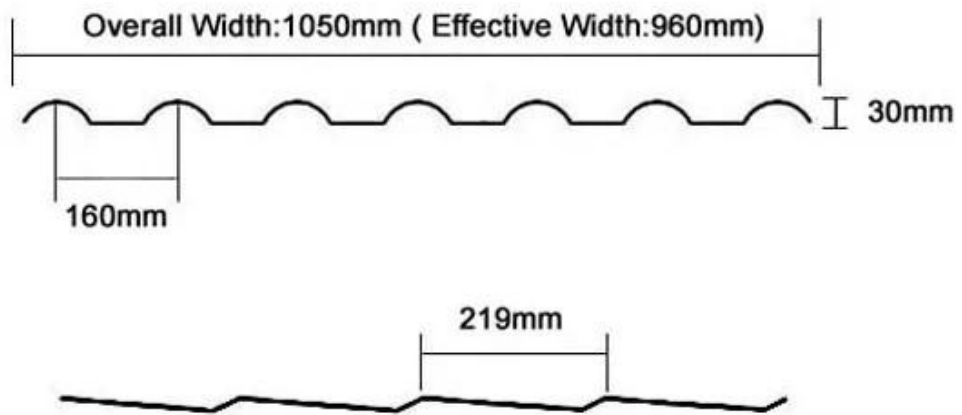

Purplish Red



Brick Red



Sky Blue



Black



Dark Green

Nombor model	#1050-160-30
Type	Spanish Style


Overall Width	1050mm
Effective Width	960mm
Thickness	2.3mm / 2.5mm / 2.8mm / 3.0mm
Length	Must be a multiple of section
Warna	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Wave Height	30mm
Section Length	219mm

Structure:

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bawah: The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

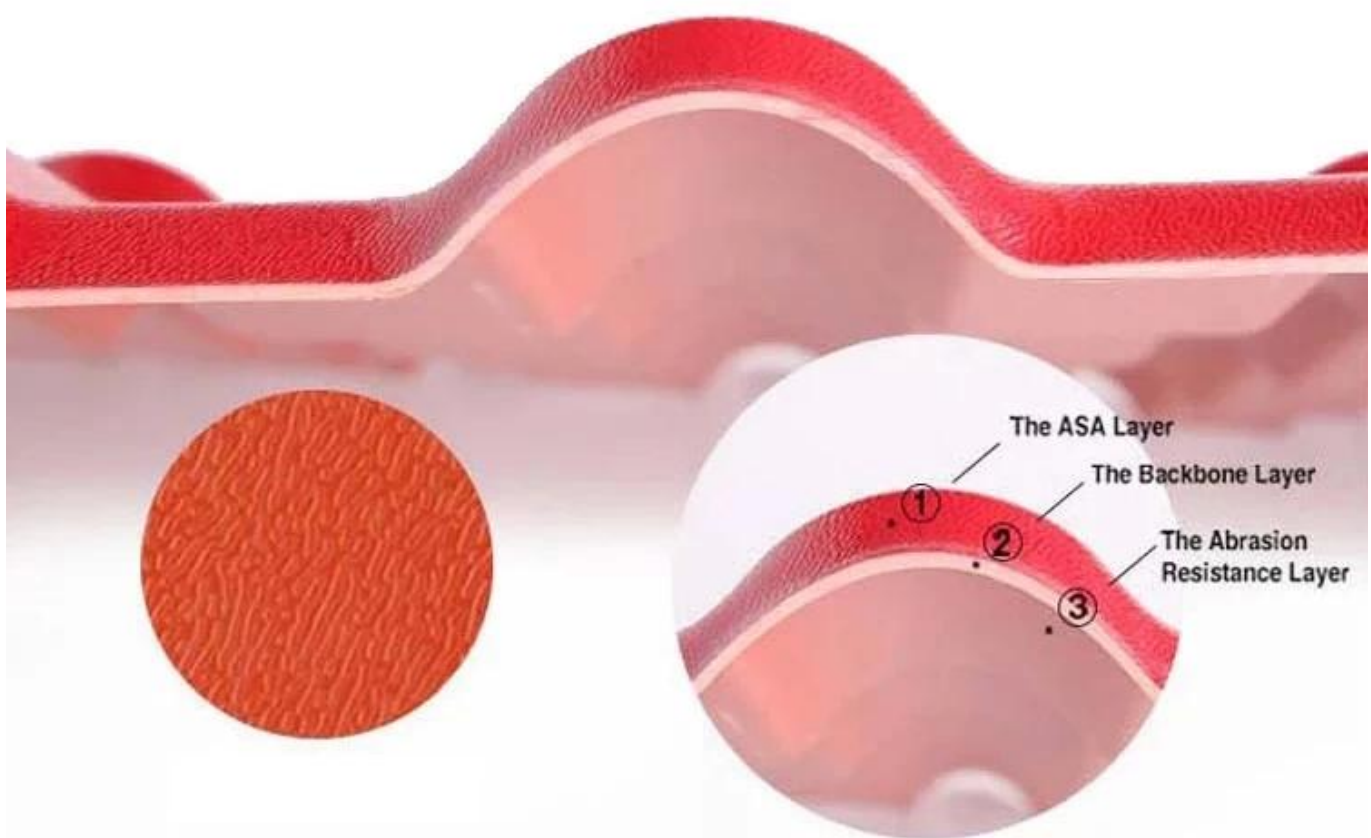

Feature:

- **Long-lasting Color (at least 10 years)**

- The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

- **Excellent Anti-corrosion performance**

- Synthetic Resin Tile can resist long-term acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acids under 60%. It is ideal for application in areas where acid rain is common.

- **Good Waterproofing Performance**

- Synthetic Resin Tile selects highly weather-resistant resin, which is dense and absorbs no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

- **Strong Fire Resistance**

- Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GB8624-2006 standard.

- **Excellent Heat Insulating Property**


□ The heat conductivity coefficient is 0.325 W/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore, without considering an additional heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.

- **Good sound insulation**

Tests have proved that synthetic resin tiles have excellent noise absorption function when subjected to heavy rains and strong winds.

Klik pada [Synthetic Resin Roofing Sheet](#) untuk belajar lebih lagi

resin roof tile accessories

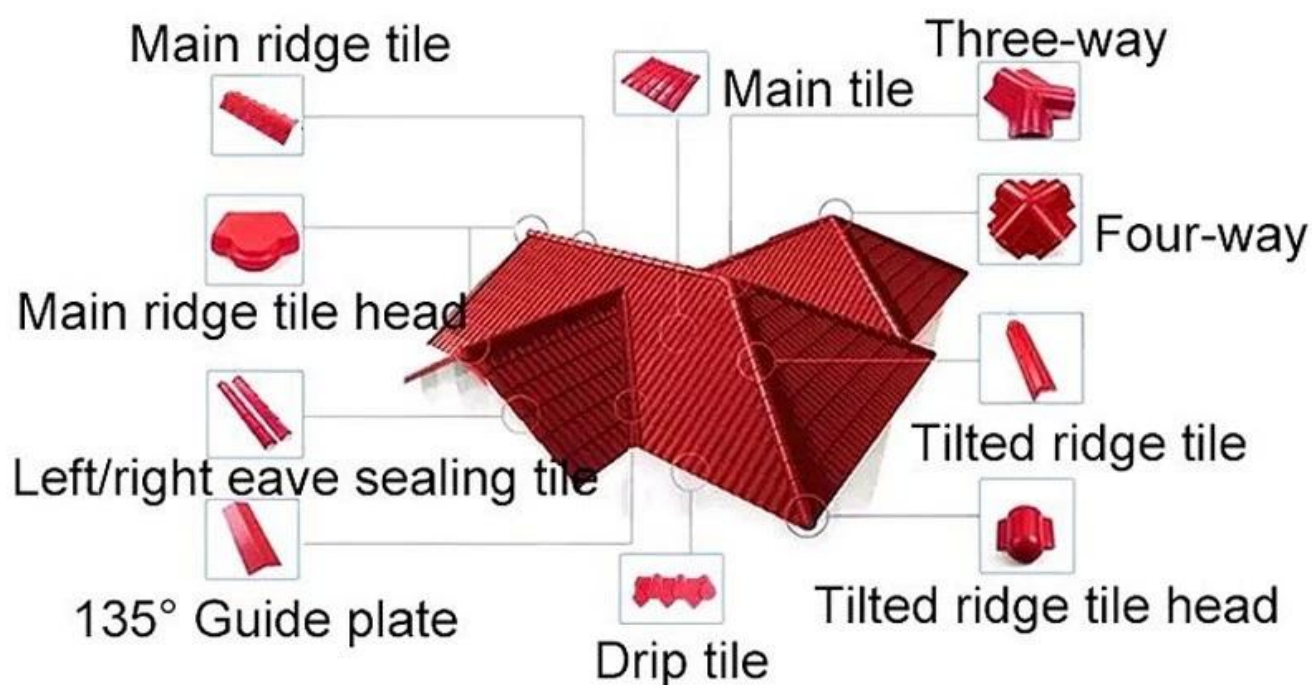

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6


Engineering case



Our Factory



Exhibition

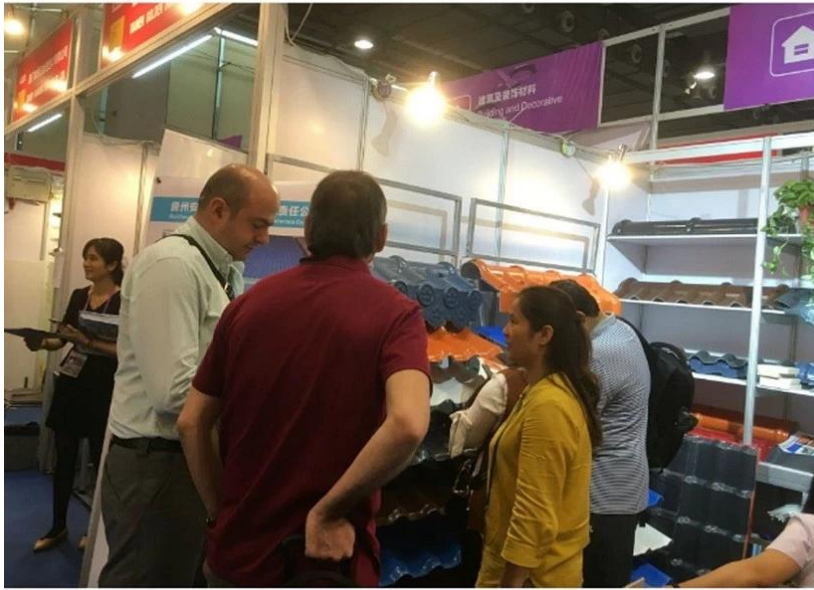

Certificate



Packaging

