
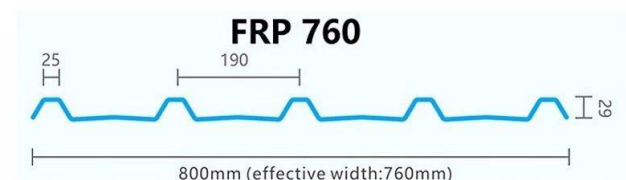
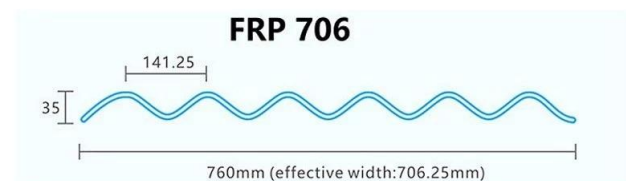
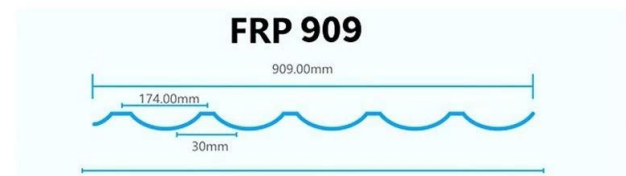
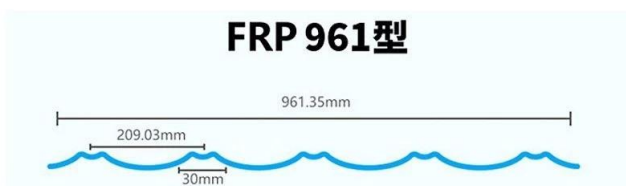
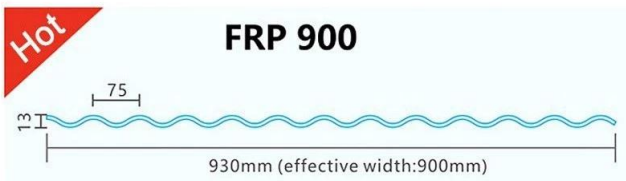


## Product show

ZXC New Material Technology Co ., Ltd. is [FRP Roofing Sheet Manufacturers China](#), Our products include PVC sheets, ASA Synthetic Resin Roof Tile, FRP Roofing Tiles, gutter etc. If your order matches our stock size details, we can faster delivery time. Of course we can also customize for you.

Nama Produk	Transparent PC Roof Sheet
Permohonan	Green houses, skylights and so on
Warna	Transparent white,blue ,green
Panjangnya	disesuaikan
Ketebalan	1mm,1.2mm,1.5mm,2.0mm
Keseluruhan lebar	920mm
Lebar yang berkesan.	840mm
Purlin Spacing.	700~800mm
Surface.	Permukaan licin
Bahan mentah	Pc Named Bayer

## More Types

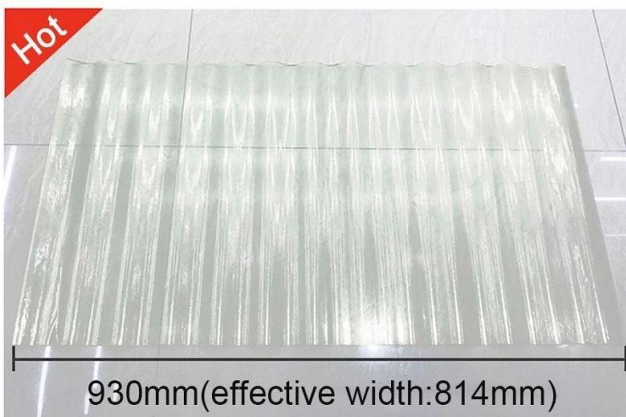

Click [\*\*FRP Translucent Roofing Sheets Wholesales\*\*](#) untuk belajar lebih lagi

# Our Factory





# Engineering case





# Exhibition



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk resistance	mm	≤ 0	0	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Slip-resistance	1/100	---	150	---
5	Impact strength	MJ/m <sup>2</sup>	≥ 2.0	3.0	Pass
6	Flexural strength	%	≥ 2.0	3.0	Pass
7	Water absorption (1h, 3h, 7d)	---	No significant cracks or water absorption	Confirmed	Pass
8	Acid resistance (10%, 20%, 30%)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (10%, 20%, 30%)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Freeze-thaw resistance (open/closed cycle 50 cycles)	---	≤ 0.5	0.2	Pass
11	Change index	%	≤ 0.1	0.05	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	MPa	≥ 2.0	2.8	Pass
4	Flexural strength	%	≥ 2.0	3.0	Pass
5	Flexural modulus	MPa	≥ 2000	3000	Pass
6	Impact strength	MJ/m <sup>2</sup>	≥ 2.0	3.0	Pass
7	Water absorption (1h, 3h, 7d)	---	No significant cracks or water absorption	Confirmed	Pass
8	Acid resistance (10%, 20%, 30%)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (10%, 20%, 30%)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Freeze-thaw resistance (open/closed cycle 50 cycles)	---	≤ 0.5	0.2	Pass
11	Change index	%	≤ 0.1	0.05	Pass





# Packaging





# FAQ

**\* Adakah anda pengeluar atau pedagang?**

\*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\* Bolehkah saya memesan produk dengan saya mahu profil?**

\* Sudah tentu anda boleh, juga kami akan menghasilkan produk mengikut permintaan terperinci anda.

**\* Bolehkah anda meletakkan jenama syarikat saya pada produk anda?**

\* Ya, kami menerima perkhidmatan OEM & ODM.Tetapi kami memerlukan beberapa maklumat mengenai syarikat anda.

**\* Bagaimana untuk memasang lembaran bumbung?**

\* Sila hubungi kakitangan perkhidmatan kami, kami mempunyai video pemasangan untuk anda.

**\* Bolehkah anda memberikan sampel untuk saya membuka pasaran dan kualiti ujian?**

\*Yes,we can.We can provide free samples to you ,Could you pay the shipping cost?Please contact our service staff.

**\* Apakah istilah perdagangan anda?**

- \* Pembayaran: T / T 30% terlebih dahulu, baki sebelum penghantaran.
- Pengeluaran masa utama: dalam masa 7 hari bekerja selepas deposit 30%
- FOB Port Shipping: Foshan, Guangzhou, Shenzhen