

Product show



1. Iba't ibang hilaw na materyales sa pamamagitan ng a tiyak na porsyento ng paghahalo, sa hopper



2. Ang pinaghalong hilaw na materyales ay pref - ormed at pinainit para maging flat tiles




3. Pagkatapos ay sa pamamagitan ng presyon ng amag, nababangat ang paghubog, paglamig, sa pamamagitan ng traksyon ng makina na dahan-dahang ipinakilala




4. Upang makamit ang haba ng mga pangangailangan ng customer putulin. pagkatapos ng artificial out



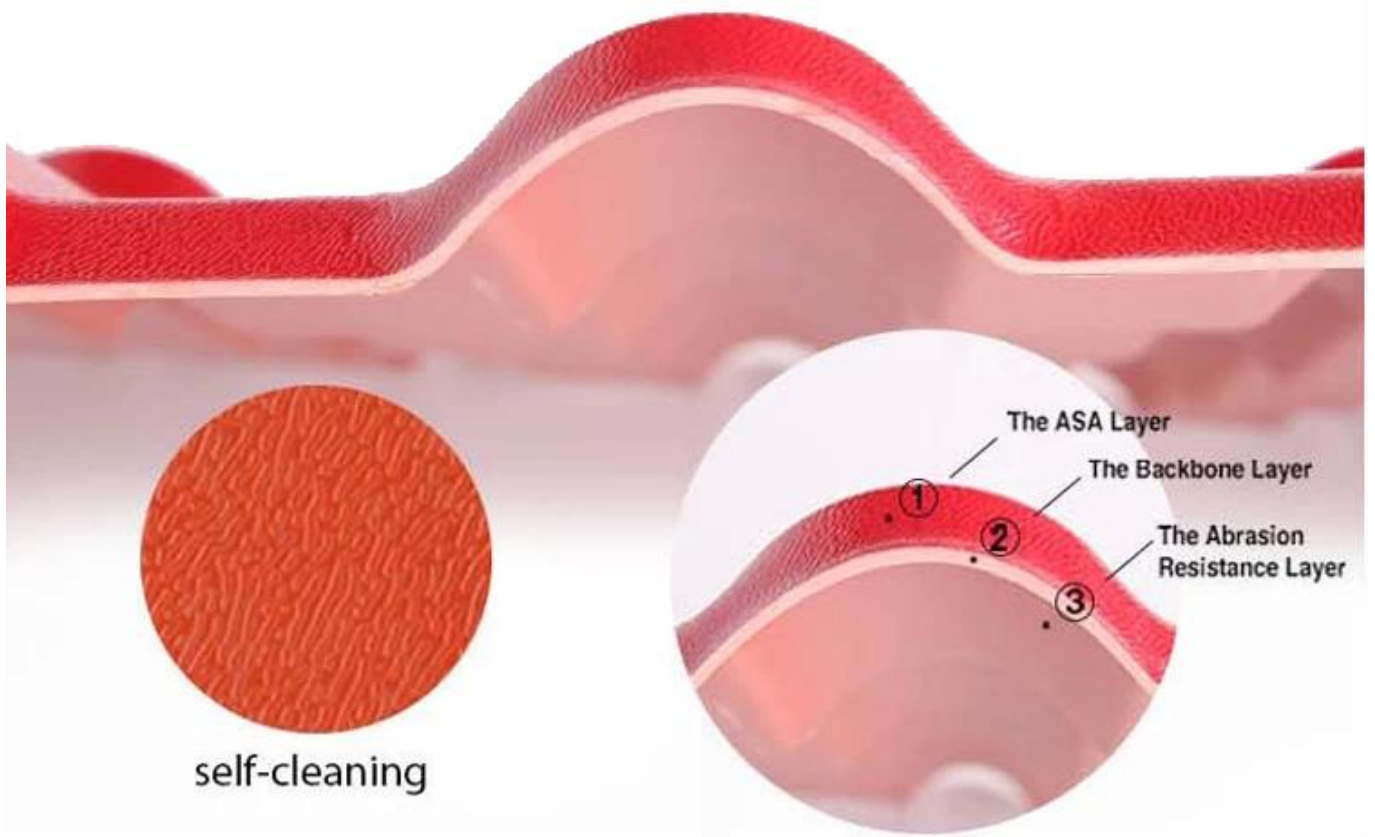

self-cleaning

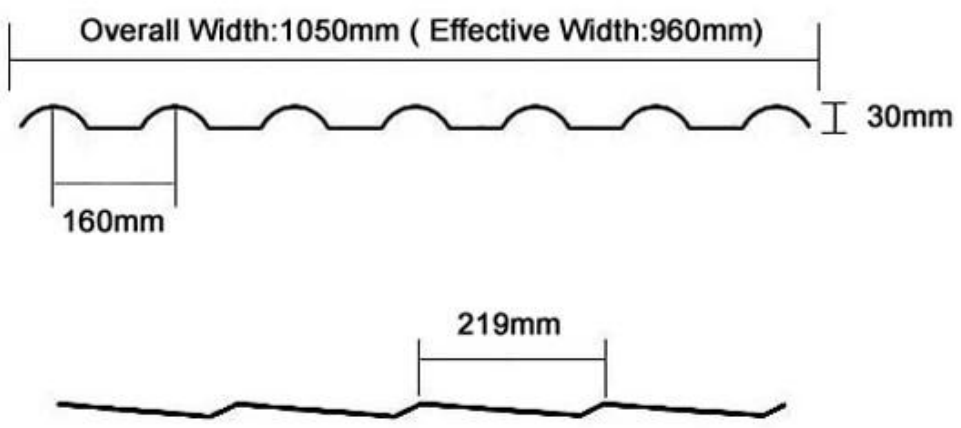

Purplish Red













Brick Red

Sky Blue

Black

Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Wall thickness	mm	Wall thickness should be even, and uniformity is required.	Confirmed	Pass
3	Thickness deviation	mm	±0.15	0.12	Pass
4	Density	g/cm ³	1.170	1.170	Pass
5	Tensile strength	MPa	≥2.0	2.0	Pass
6	Elongation at break	%	≥2.0	3.0	Pass
7	Holding full impact	kJ/m ²	Not specified, verify on work order report.	Confirmed	Pass
8	Anti-static	---	The surface static charge is not excessive.	Confirmed	Pass
9	Flame retardancy	---	Flame retardancy is not excessive.	Confirmed	Pass
10	Flame retardancy	---	Flame retardancy is not excessive.	Confirmed	Pass
11	Impact strength	kJ/m ²	≥0.5	0.5	Pass
12	Impact strength	kJ/m ²	≥0.5	0.5	Pass

Foshan Supervision Testing Centre of Quality and Metrology
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no bubbles, cracks, visible impurities, or other defects.	Confirmed	Pass
2	Surface roughness	mm	0.15	0.15	Pass
3	Tensile strength	MPa	≥2.0	2.0	Pass
4	Elongation at break	%	≥2.0	3.0	Pass
5	Flexural strength	MPa	≥0.5	0.5	Pass
6	Flexural deflection	MPa	≥0.5	0.5	Pass
7	Density	g/cm ³	1.170	1.170	Pass
8	Heat stability	---	100	100	Pass
9	Heat stability	---	100	100	Pass
10	Heat stability	---	100	100	Pass
11	Heat stability	---	100	100	Pass
12	Heat stability	---	100	100	Pass
13	Heat stability	---	100	100	Pass
14	Heat stability	---	100	100	Pass
15	Heat stability	---	100	100	Pass
16	Heat stability	---	100	100	Pass
17	Heat stability	---	100	100	Pass
18	Heat stability	---	100	100	Pass
19	Heat stability	---	100	100	Pass
20	Heat stability	---	100	100	Pass



Our Factory





Our Customer



Packaging



FAQ

*** Ikaw ba ay tagagawa o mangangalakal?**

*** Oo, kami ay tunay na tagagawa, maraming larawan sa pagpapakilala ng aming kumpanya. kung kailangan mo ng iba pang espesyal na produkto, gagawin namin ang aming makakaya upang matulungan ka, upang makabuo kami ng pangmatagalang relasyon sa negosyo.**

*** Maaari ba akong mag-order ng produkto na may gusto kong profile?**

*** Syempre kaya mo, gagawa din kami ng mga produkto ayon sa iyong mga kahilingan sa detalye.**

*** Maaari mo bang ilagay ang tatak ng aking kumpanya sa iyong mga produkto?**

*** Oo, tumatanggap kami ng serbisyo ng OEM at ODM. Ngunit kailangan namin ng ilang impormasyon tungkol sa iyong kumpanya.**

*** Paano i-install ang roofing sheet?**

*** Mangyaring makipag-ugnayan sa aming kawani ng serbisyo, mayroon kaming video sa pag-install para sa iyo.**

*** Maaari ka bang magbigay ng mga sample para mabuksan ko ang merkado at masuri kalidad?**

*** Oo, kaya namin. Maaari kaming magbigay ng mga libreng sample sa iyo, Maaari mo bang bayaran ang gastos sa pagpapadala? Mangyaring makipag-ugnayan sa aming mga tauhan ng serbisyo.**

*** Ano ang iyong termino sa kalakalan?**

*** Pagbabayad: T/T 30% nang maaga, balanse bago ipadala.**

• Production Lead Time: Sa loob ng 7 araw ng trabaho pagkatapos ng 30% na deposito

• FOB Shipping Port: Foshan, Guangzhou, Shenzhen