

Product show

zxc heat resistant corrugated [Custom ASA PVC Roofing Sheet](#)



1. A variety of raw materials by a certain percentage mixing, into the hopper
2. The mixed raw materials are pre-formed and heated to become flat tiles
3. Then through the mold pressure, elastic the molding, cooling, through the traction machine slowly introduced
4. To achieve the length of customer needs cut off. after artificial out





pangalan ng Produkto	Estilo ng Espanyol ASA Roof Tile.
Tatak	ZXC.
Lugar ng Pinagmulan	Foshan City, Guangdong Province, China (Mainland)
Materyal	Acrylonitrile styrene acrylate copolymer, polyvinyl chloride, Kaltsyum pulbos, iba pang mga kemikal na materyales
Garantiya	25 taon
Sertipikasyon	ISO9001 / SGS / CE
Minimum na dami ng order.	100 metro kuwadrado
Oras ng paghatid	1x20gp para sa 6 na araw, 1x40gp para sa 7 araw
Kakayahang supply	Mayroon kaming 8 mga linya ng paggawa, mga 13500 metro kuwadrado araw-araw
Kasunduan sa pagbabayad	T / T, una magbayad ng 30% na deposito, bago mag-load ng lalagyan magbayad ng pahinga ng pagbabayad L/C ,
Pagpapadala	Buong lalagyan load (FCL) serbisyo, ginagawa namin ito sa pamamagitan ng aking sarili. Mas mababa sa serbisyo ng lalagyan (LCL), nakita namin ang aming mga ahente upang gawin ito.
Pakete	Pallet o pe bag.
Port.	Guangzhou / Shenzhen / Foshan.
Application.	Villa Roofing, House Roofing, Garden, Grange, Container House, Flat sa slope project, atbp

Numero ng modelo	# 1050-160-30.
------------------	----------------

Type.	Estilo ng Espanyol
Pangkalahatang lapad	1050mm
Epektibong lapad	960mm.
Kapal	2.3mm / 2.5mm / 2.8mm / 3.0mm.
Haba.	Must be a multiple of section
Kulay	Orange / Red / Grey / Sky blue / Dark green/Customized
Wave spacing.	160mm.
Alon taas	30mm
Seksyon Haba	219m.
Purlin Spacing	660mm

More Types



Structure

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom: The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

Feature

• Long-lasting Color (at least 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

• Excellent Anti-corrosion performance

• Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.

• Good Waterproofing Performance

• Synthetic Resin Tile selects highly weater-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

• Strong Fire Resistance

• Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GBB8624-2006 standard.


• Excellent Heat Insulating Property

• The heat conductivity coefficient is 0.325w/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore without condidering ading heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• Good sound insulation

• Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

resin roof tile accessories

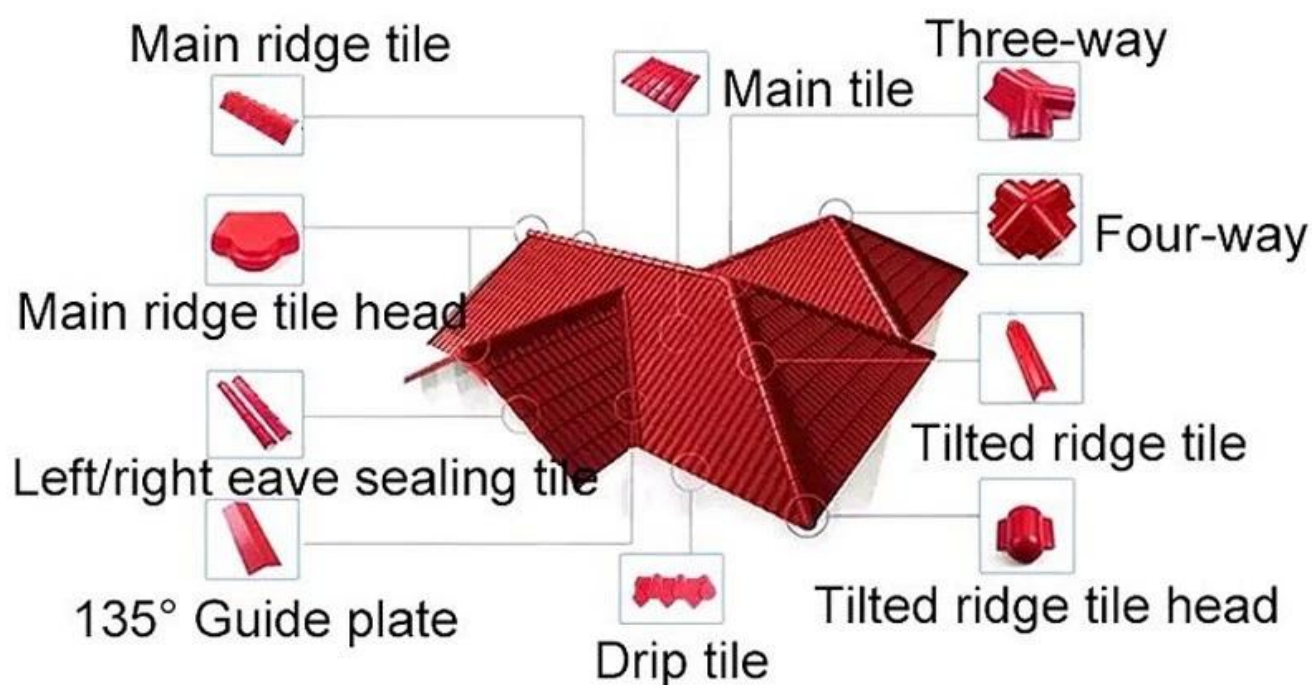

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without burr. Warpage should be less, and both sides are straight.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.10	Pass
4	Slip-resistance	1/100	---	170	---
5	Flexure strength	Mpa	≥ 20	26	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 20°C)	---	No pollution marks or water absorption	Confirmed	Pass
8	Acid resistance (5%, HCl, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (5%, NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Impact resistance (1kg, 1m)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
11	Change index	%	≤ 0.1	0.06	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Flexure strength	Mpa	≥ 20	26	Pass
4	Flexural modulus	%	≥ 20	30	Pass
5	Flexural strength	Mpa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Slip-resistance	1/100	---	170	---
8	Water absorption (1h, 20°C)	---	No pollution marks or water absorption	Confirmed	Pass
9	Acid resistance (5%, HCl, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Alkali resistance (5%, NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
11	Impact resistance (1kg, 1m)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
12	Change index	%	≤ 0.1	0.06	Pass
13	Water absorption (1h, 20°C)	---	No pollution marks or water absorption	Confirmed	Pass
14	Flexural strength	Mpa	≥ 20	26	Pass
15	Flexural modulus	%	≥ 20	30	Pass
16	Flexural strength	Mpa	≥ 20	26	Pass
17	Flexural modulus	%	≥ 20	30	Pass



Packaging



Kapal		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load Capacity	20 GP (21Tons)	4500	4200	3750	3500
	40GP (26 Tons)	5600	5200	4600	4300

Tampok:

1. Excllent Anti-corrosion Performance
2. Good Hindi nababasa Performance
3. Fire Paglaban
4. Heat insulation
5. Sound insulation
6. Weather. Katawan, aging paglaban

Package: Hubo't hubad O. Standard. pag-export pakete

FAQ

***Ikaw ay tagagawa o negosyante?**

*Oo, kami ay tunay ([ASA PVC Roofing Manufacturer China.](#)), Maraming mga larawan sa pagpapakilala ng aming kumpanya. Kung kailangan mo ng iba pang mga espesyal na produkto, gagawin namin ang aming makakaya upang makatulong sa iyo, upang maaari naming bumuo ng isang pang-matagalang relasyon sa negosyo.

***Maaari ba akong mag-order ng produkto sa gusto kong mag-profile?**

*Siyempre maaari mo, din kami ay gumawa ng mga produkto ayon sa iyong mga kahilingan sa detalye.

***Maaari mo bang ilagay ang tatak ng aking kumpanya sa iyong mga produkto?**

*Oo, tinatanggap namin ang serbisyo ng OEM & ODM. Ngunit kailangan namin ng ilang impormasyon tungkol sa iyong kumpanya.

***Paano i-install ang bubong sheet?**

*Mangyaring makipag-ugnay sa aming kawani ng serbisyo, mayroon kaming pag-install ng video para sa iyo.

***Maaari kang magbigay ng mga sample para sa akin upang buksan ang merkado at pagsubok Kalidad?**

*Oo, maaari naming magbigay ng mga libreng sample sa iyo, maaari kang magbayad ng gastos sa pagpapadala? Mangyaring makipag-ugnay sa aming kawani ng serbisyo.

***Ano ang iyong trade term?**

* Pagbabayad: T / T 30% nang maaga, balanse bago ipadala.

- oras ng lead ng produksyon: sa loob ng 7 araw ng trabaho pagkatapos ng 30% na deposito
- FOB pagpapadala port: Foshan, Guangzhou, Shenzhen