

# Product show

ZXC [waterproof plastic sheet para sa bubong](#) magbigay ng serbisyo sa pagpapasadya. Ang aming mga produkto ang pangunahing hilaw na materyal ay PVC na may ultraviolet resistant agent at additives. Sa pamamagitan ng scientific compounding, na ginawa gamit ang advanced na teknolohiya.

1. Banayad na timbang
2. Proteksyon sa kapaligiran
3. hindi tinatagusan ng tubig at hindi masusunog
4. Madaling pag-install
5. Anti-kaagnasan
6. Good sound insulation



zxc roofing tile industry

# After sales less is really good

Ten years of slow fading, **30** years of warranty



## GOOD CHOICE

Our advantage



Intimate service, strong product supply capacity



product available



A variety of styles and specifications sufficient stock



Support customization



Specifications and sizes can be consulted with customer service in detail, and quotations can be customized



Worry-free after sales



Manufacturers wholesale quality assurance, affordable prices, worry-free after-sales

<b>Ang haba</b>	1m-12m
<b>Ibabaw</b>	Matt
<b>Timbang</b>	3.0-6.8kg/m
<b>Lapad</b>	1130mm/ 1080mm/ 1050mm/ 980mm/ 930mm
<b>Garantiya</b>	30 taon
<b>Numero ng Modelo</b>	ASA PVC Composite Sheet
<b>Function</b>	Insulation, Flame Retardant, Heat Insulation, Anti-corrosion, Impact Resistance
<b>Hugis</b>	bilog na alon, malaking bilog na alon, trepezoidal wave
<b>Rating ng Proteksyon sa Sunog</b>	B1
<b>Temperatura</b>	-10 Degrees Celsius hanggang 70 Degrees Celsius
<b>Kulay</b>	Puti, Asul, Gray, Pula, nako-customize
<b>Mga layer</b>	2 o 3 layer
<b>Pangmatagalang Kulay</b>	10 Taon Walang Kupas

**I-click [supplier ng oem plastic roof sheets](#) para matuto pa**



# SOURCE MANUFACTURER #

---

>





# THE TROUBLES OF TRADITIONAL ROOF TILES

#

other products

×



## severely faded

Wind and sun soften and fade



## There is a gap

Uneven with gaps, leaking rain



## uneven color

Weathered uneven color  
phenomenon




## Fragile

Fragile and complicated  
to install

## our products ✓

Ten years of slow fading, 30 years of warranty

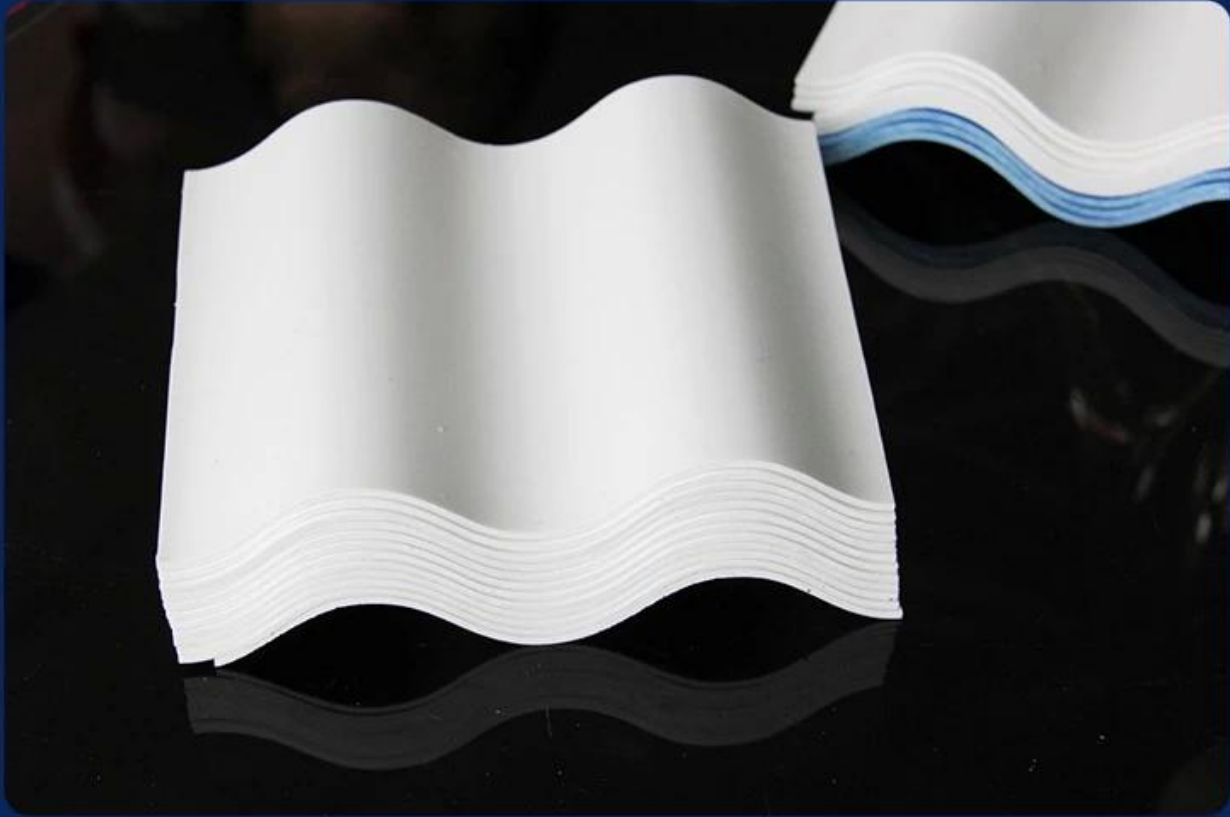

**Uniform color, durable and not easy to fade**  
Good quality, durable and bright.



high toughness



Strong pressure resistance



Effective insulation



good sound insulatio



**thermal and acoustic insulation high-quality**  
Good sound insulation effect in case of external noise



**preservative**  
Anti-acid and alkali



**flame retardant performance**  
b1 class fire performance

# PRODUCT PARAMETERS

---

#

>



**thickness:** 1.0mm-3.0mm

**width:** 1130/980/900/840/1080mm

**length:** customizable

**waveform:** big hang, small wave

**type:** asa plastic roofing tile

**Be applicable:** Factory buildings, ware houses, markets, residences, market roads, canopies, chemically corrosive factories

---



# A variety of colors, optional to build different architectural styles

More colors can be customized



<Mlight yellow>



<dark blue>



<grass green>



<Beige>





# CUSTOMER CASE SHOW #





Factory renovation



# Our Factory

Matatagpuan ang Zhongxingcheng New Material Co., Ltd. sa Foshan City, Nanhai District China ay isang tagagawa na dalubhasa sa paggawa ng ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC



anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.



## Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing



Factory display



In-stock inventory



Own production line



Own production line



# Exhibition





# Certificate



# Official quality inspection, quality assurance

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质量计量监督检测中心  
**检验报告**  
 报告号: QB-049-02  
 样品号: 20181212212  
 检测项目: 外观、密度、弯曲性能、冲击性能、吸水率

序号	检测项目	单位	标准要求	检测结果	判定
1	外观	—	表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、气孔、烧焦、气泡、明显麻点、杂质点	符合	合格
2	密度	g/cm <sup>3</sup>	1.45~1.65	1.64	合格
3	弯曲性能	mm	支撑跨度300mm, 载荷40kg, 允许挠度≤50	15	合格
4	冲击性能	—	1kg重钢球, 1.5m自由落体, 冲击试样无碎裂, 试样经冲击试验后不得产生贯穿的孔穴或裂纹	符合	合格
5	吸水率	%	≥60	43	合格

审核: 王博斌  
 主检: 陈德聪  
**全部合格**

# Packaging



# FAQ

## **\*Tagagawa ka ba o mangangalakal?**

\*Oo, kami ay tunay na Manufacturer, maraming mga larawan sa pagpapakilala ng aming kumpanya. Kung kailangan mo ng iba pang espesyal na produkto, gagawin namin ang aming makakaya upang matulongan ka, upang makagawa kami ng pangmatagalang relasyon sa negosyo.

## **\*Maaari ba akong mag-order ng produkto gamit ang gusto kong i-profile?**

\*Siyempre kaya mo, gayundin gagawa kami ng mga produkto ayon sa iyong mga kahilingan sa detalye.



**\*Maaari mo bang ilagay ang tatak ng aking kumpanya sa iyong mga produkto?**

\*Oo, tumatanggap kami ng serbisyo ng OEM at ODM. Ngunit kailangan namin ng ilang impormasyon tungkol sa iyong kumpanya.

**\*Paano i-install ang roofing sheet?**

\*Mangyaring makipag-ugnayan sa aming service staff, mayroon kaming installation video para sa iyo.

**\*Maaari ka bang magbigay ng mga sample para mabuksan ko ang merkado at masuri ang kalidad?**

\*Oo, kaya namin. Maaari kaming magbigay ng mga libreng sample sa iyo, Maaari mo bang bayaran ang gastos sa pagpapadala? Mangyaring makipag-ugnayan sa aming kawani ng serbisyo.

**\*Ano ang iyong termino sa kalakalan?**

\* Pagbabayad: T/T 30% in advance, balanse bago ipadala.

- Production Lead Time: Sa loob ng 7 araw ng trabaho pagkatapos ng 30% na deposito
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen