

Product show

Ang aming mga produkto ang pangunahing hilaw na materyal ay PVC na may ultraviolet resistant agent at additives. Sa pamamagitan ng scientific compounding, na ginawa gamit ang advanced na teknolohiya. ([PVC Plastic Roofing Wholesales China](#))

1. Banayad na timbang
2. Pangangalaga sa kapaligiran
3. hindi tinatablan ng tubig at hindi masusunog
4. Madaling pag-install
5. Anti-corrosion
6. Magandang pagkakabukod ng tunog



zxc roofing tile industry

After sales less is really good

Ten years of slow fading, **30** years of warranty



GOOD CHOICE

Our advantage



Intimate service, strong product supply capacity



product available



A variety of styles and specifications sufficient stock



Support customization



Specifications and sizes can be consulted with customer service in detail, and quotations can be customized



Worry-free after sales



Manufacturers wholesale quality assurance, affordable prices, worry-free after-sales

Ang haba	1m-12m
Ibabaw	Matt
Timbang	3.0-6.8kg/m
Lapad	1130mm/ 1080mm/ 1050mm/ 980mm/ 930mm
Garantiya	30 taon
Numero ng Modelo	ASA PVC Composite Sheet
Function	Insulation, Flame Retardant, Heat Insulation, Anti-corrosion, Impact Resistance
Hugis	bilog na alon, malaking bilog na alon, trepezoidal wave
Rating ng Proteksyon sa Sunog	B1
Temperatura	-10 Degrees Celsius hanggang 70 Degrees Celsius
Kulay	Puti, Asul, Gray, Pula, nako-customize
Mga layer	2 o 3 layer
Pangmatagalang Kulay	10 Taon Walang Kupas

I-click [Ibinebenta ang Plastic PVC Roofing Sheet](#) para matuto pa

SOURCE MANUFACTURER

>



Professional production process, product quality sampling inspection by professionals



Exquisite workmanship, producing high-quality products



Great price, fast delivery

THE TROUBLES OF TRADITIONAL ROOF TILES

#

other products

×



severely faded

Wind and sun soften and fade



There is a gap

Uneven with gaps, leaking rain



uneven color

Weathered uneven color
phenomenon



Fragile

Fragile and complicated
to install

our products ✓

Ten years of slow fading, 30 years of warranty



Uniform color, durable and not easy to fade
Good quality, durable and bright.



high toughness



Strong pressure resistance

Effective insulation



good sound insulatio



thermal and acoustic insulation high-quality
Good sound insulation effect in case of external noise



preservative
Anti-acid and alkali



flame retardant performance
b1 class fire performance

PRODUCT PARAMETERS

#

>



thickness: 1.0mm-3.0mm

width: 1130/980/900/840/1080mm

length: customizable

waveform: big hang, small wave

type: asa plastic roofing tile

Be applicable: Factory buildings, ware houses, markets, residences, market roads, canopies, chemically corrosive factories

A variety of colors, optional to build different architectural styles

More colors can be customized



<Mlight yellow>



<dark blue>




<grass green>



<Beige>

Accessories and Installation Diagram

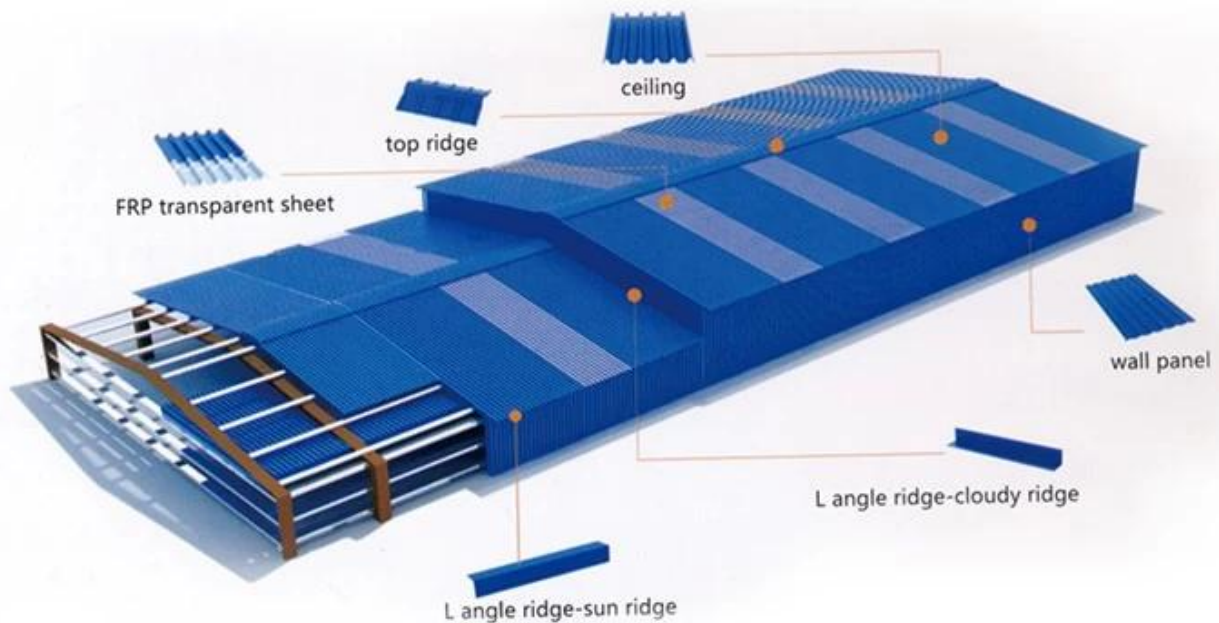

*pvc plastic waterproof cap, used with self-tapping screws to fix the tile on the skeleton



CUSTOMER CASE SHOW





Factory renovation



Our Factory

Matatagpuan ang Zhongxingcheng New Material Co., Ltd. sa Foshan City, Nanhai District China ay isang tagagawa na dalubhasa sa paggawa ng ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC

anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.



Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing

Factory display



In-stock inventory



Own production line



Own production line



Exhibition



Certificate

Official quality inspection, quality assurance

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质
Foshan Supervision

佛山市质量计量监督检测中心
检验报告
 报告号: QB-049-02
 样品号: G14-WT1489
 共 3 页, 第 2 页

序号	检测项目	单位	标准要求	检测结果	判定
1	外观	—	表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、气孔、烧焦、气泡、明显麻点、杂质	符合	合格
2	密度	g/cm ³	1.45~1.65	1.64	合格
3	弯曲性能	mm	支撑跨度800mm, 载荷40kg, 允许挠度≤50	15	合格
4	冲击性能	—	1kg重钢球, 1.5m自由落体, 冲击试样无裂纹, 试样经冲击试验后不得产生贯穿的孔穴或裂纹	符合	合格
5	吸水率	%	≥60	43	合格

审核: 王博斌
 主检: 梁德聪

全部合格

佛山市质量计量监督检测中心
 共 3 页, 第 1 页
 生产日期: —
 编号或批号: —
 样品编号: —
 检测类别: 委托检测
 样品数量: 2件
 检测日期: 2019年6月24日
 检测人: 李东平

Packaging



FAQ

***Tagagawa ka ba o mangangalakal?**

*Oo, kami ay tunay na Manufacturer, maraming mga larawan sa pagpapakilala ng aming kumpanya. Kung kailangan mo ng iba pang espesyal na produkto, gagawin namin ang aming makakaya upang matulungan ka, upang makagawa kami ng pangmatagalang relasyon sa negosyo.

***Maaari ba akong mag-order ng produkto gamit ang gusto kong i-profile?**

*Siyempre kaya mo, gayundin gagawa kami ng mga produkto ayon sa iyong mga kahilingan sa detalye.

***Maaari mo bang ilagay ang tatak ng aking kumpanya sa iyong mga produkto?**

*Oo, tumatanggap kami ng serbisyo ng OEM at ODM. Ngunit kailangan namin ng ilang impormasyon tungkol sa iyong kumpanya.

***Paano i-install ang roofing sheet?**

*Mangyaring makipag-ugnayan sa aming service staff, mayroon kaming installation video para sa iyo.

***Maaari ka bang magbigay ng mga sample para mabuksan ko ang merkado at masuri ang kalidad?**

*Oo, kaya namin. Maaari kaming magbigay ng mga libreng sample sa iyo, Maaari mo bang bayaran ang gastos sa pagpapadala? Mangyaring makipag-ugnayan sa aming kawani ng serbisyo.

***Ano ang iyong termino sa kalakalan?**

* Pagbabayad: T/T 30% in advance, balanse bago ipadala.

- Production Lead Time: Sa loob ng 7 araw ng trabaho pagkatapos ng 30% na deposito
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen