ZXC FRP roof sheet Excllent Anti-corrosion performance:

The frp roofing sheet offered by our company are specifically designed to resist various acids, alkalis, and peroxides. This makes them particularly suitable for application in coastal areas and corrosive environments.

Superior light transmission:

It is between 60-85%. Light through FRP lighting sheet scatters and is mild. It will not form a light band so as to make the indoor brighter.

High quality:

Relative density between 1.3-2.0, only carbon steel 1 / 4-1 / 5, the tensile strength is close, even more than carbon steel, and the specific strength can be compared with the high alloy steel.

FRP roofing sheet manufacturers load test, invited a weight of about 80 kg of men standing on the span of 130 cm of the Fiberglass clear roofing sheet , the test successfully completed. The test proves that the quality of FRP tile meets the national standard.

Weather fastness, ageing resistance:

Long exposure to the atmosphere, the sun radiation, the product integrity, no deformation, the useful life of up to 10 years.

ZXC is China's premier transparent FRP roofing sheet manufacturer, offering customized solutions at competitive prices. As a leading PVC translucent sheet roof and FRP sheets supplier, we take pride in providing high-quality products that are resistant to various acids, alkalis, and peroxides, making them ideal for coastal areas and corrosive environments. Contact us **FRP Sheets Supplier China** for all your roofing needs or leave us a message for more information.



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE






Model frp-01 Surface Smooth surface Length 6000mm , 11800mm or customized Type Trapezoidal type, Round Wave Type Overall width 930mm Effective width 840mm Purlin spacing 660mm Thickness 1.0±0.1mm 1.2±0.1mm 2.0±0.1mm 2.0±0.1mm 2.0±0.1mm Sufface 2.0±0.1mm 1.5±0.1mm 2.0±0.1mm 1.5±0.1mm 3.0±0.1kg/m2 Sufface 2.0±0.1mm Sufface 2.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface 3.0±0.1kg/m2 Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface Sufface </th <th></th> <th></th>		
Surface Smooth surface Length 6000mm, 11800mm or customized Type Trapezoidal type, Round Wave Type Overall width 930mm Effective width 840mm Purlin spacing 660mm Thickness 1.0±0.1mm 1.2±0.1mm 1.2±0.1mm Weight 2.0±0.1mm Weight 1.7±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) 12000 m2 15000 m2 12000 m2 15000 m2	Product name	Easy And Fast Installation Types Of Balcony Clear Plastic Roof Covering
Length 6000mm , 11800mm or customized Type Trapezoidal type,Round Wave Type Overall width 930mm Effective width 840mm Purlin spacing 660mm Thickness 1.0±0.1mm 1.0±0.1mm 1.2±0.1mm 2.0±0.1mm 1.5±0.1mm Weight 1.7±0.1kg/m2 SQ.M./20 FCL (21 Tons) Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2	Model	frp-01
Type Trapezoidal type, Round Wave Type Overall width 930mm Effective width 840mm Purlin spacing 660mm Thickness 1.0±0.1mm Thickness 1.2±0.1mm Weight 2.0±0.1mm Weight 1.7±0.1kg/m2 SQ.M./20 FCL (21 Tons) Container Load capacity 12000 m2 15000 m2 12000 m2 15000 m2	Surface	Smooth surface
Overall width 930mm Effective width 840mm Purlin spacing 660mm Image: Purlin spacing 660mm Thickness 1.0±0.1mm Image: Purlin spacing 1.0±0.1mm Thickness 1.2±0.1mm Image: Purlin spacing 1.5±0.1mm Image: Purlin spacing 1.5±0.1mm Image: Purlin spacing 2.0±0.1mm Image: Purlin spacing 1.7±0.1kg/m2 Image: Purlin spacing 2.1±0.1kg/m2 Image: Purlin spacing 3.0±0.1kg/m2 Image: Purlin spacing 3.0±0.1kg/m2 Image: Purlin spacing Image: Purlin spacing Image: Pu	Length	6000mm , 11800mm or customized
Effective width 840mm Purlin spacing 660mm Intekness 1.0±0.1mm Thickness 1.2±0.1mm Weight 1.5±0.1mm Weight 2.0±0.1mm SQ.M./20 FCL (21 Tons) Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 12300 m2 12300 m2	Туре	Trapezoidal type,Round Wave Type
Purlin spacing 660mm 1.0±0.1mm 1.0±0.1mm Thickness 1.2±0.1mm 2.0±0.1mm 2.0±0.1mm 2.0±0.1mm 2.0±0.1mm Weight 2.1±0.1kg/m2 2.1±0.1kg/m2 3.0±0.1kg/m2 3.0±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity 3.0±0.1kg/m2 12000 m2 15000 m2 10000 m2 12300 m2	Overall width	930mm
Image: Container Load capacity SQ.M./20 FCL (21 Tons) 12000 m2	Effective width	840mm
Thickness 1.2±0.1mm 1.5±0.1mm 2.0±0.1mm 2.0±0.1mm 2.0±0.1mg Weight 1.7±0.1kg/m2 2.1±0.1kg/m2 2.1±0.1kg/m2 2.6±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 10000 m2 12300 m2	Purlin spacing	660mm
Thickness 1.5±0.1mm 2.0±0.1mm 2.0±0.1mg Weight 1.7±0.1kg/m2 2.1±0.1kg/m2 2.6±0.1kg/m2 3.0±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 10000 m2 12300 m2	Thickness	1.0±0.1mm
1.5±0.1mm 2.0±0.1mm 0.17±0.1kg/m2 2.1±0.1kg/m2 2.6±0.1kg/m2 0.0±0.1kg/m2 0.0±0.1kg/m2 0.0±0.1kg/m2 0.0±0.1kg/m2 1.2000 m2 12000 m2 10000 m2		1.2±0.1mm
Weight 1.7±0.1kg/m2 2.1±0.1kg/m2 2.6±0.1kg/m2 2.6±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) 12000 m2 15000 m2 10000 m2 12300 m2		1.5±0.1mm
Weight 2.1±0.1kg/m2 2.6±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./20 FCL (21 Tons) 12000 m2 15000 m2 10000 m2 12300 m2		2.0±0.1mm
Weight 2.6±0.1kg/m2 3.0±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) 12000 m2 15000 m2 10000 m2 12300 m2	Weight	1.7±0.1kg/m2
Z.6±0.1kg/m2 3.0±0.1kg/m2 Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 10000 m2 12300 m2		2.1±0.1kg/m2
Container Load capacity SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 10000 m2 12300 m2		2.6±0.1kg/m2
SQ.M./20 FCL (21 Tons) SQ.M./40 FCL (26 Tons) 12000 m2 15000 m2 10000 m2 12300 m2		3.0±0.1kg/m2
12000 m2 15000 m2 10000 m2 12300 m2	Container Load capacity	
10000 m2 12300 m2	SQ.M./20 FCL (21 Tons)	SQ.M./40 FCL (26 Tons)
	12000 m2	15000 m2
	10000 m2	12300 m2
8000m2 10000 m2	8000m2	10000 m2
7000m2 8600m2	7000m2	8600m2

We <u>corrugated fiberglass panels price</u>, provide the low price custom services, if you have any roof tile needs, feel free to contact us for sales or leave us a message!

CUSTOMER CASE SHOW

Has more than ten years of production experience

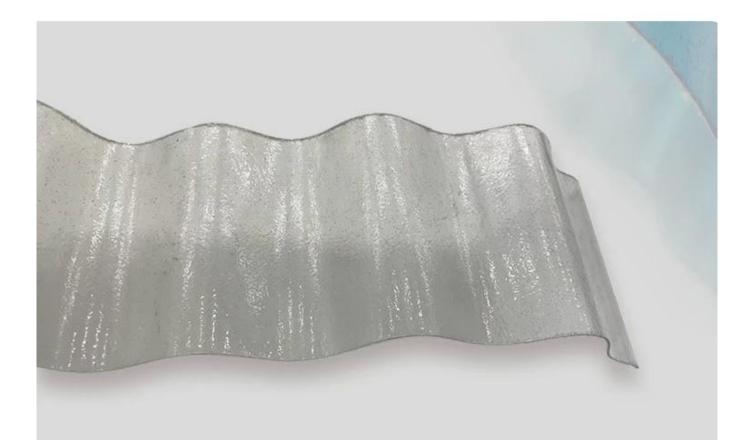

thickness:	1.0mm-2.8mm
width:	1130/ 930/ 900/ 840mm
length:	customizable
waveform:	big hang, small wave
place of origin:	foshan
IBE anniicanie:	Factory buildings, warehouses, marketsresidences, market roads, awnings, canopies, building roofingworks, ceramic factories, etc.

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue





grass green

Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details



CUSTOMER CASE SHOW

More than ten years of production experience
















APPLICABLE SCENE DISPLAY

scope of application



planting shed

Rainproof, constant temperature moisturizing space, transparent



roof

Good light transmission performance,no rain leakage




Villa shed Bright colors, more class



Recreation area Color unevenness due to weathering

SIX REASONS TO CHOOSE US

Iron tiles can be directly covered

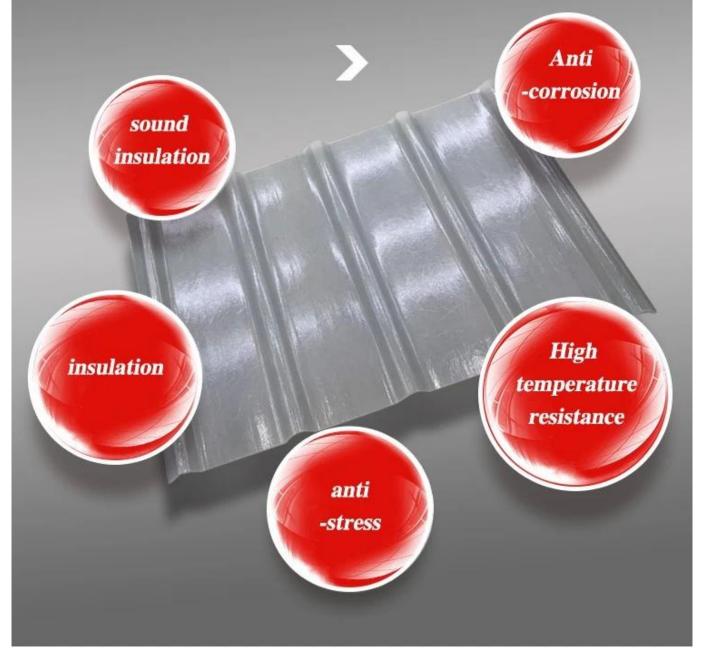



Good quality and low price. Quality assurance, trustworthy













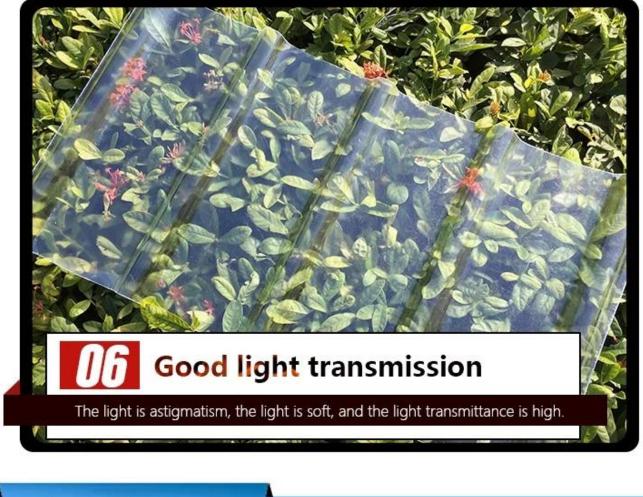

Our Factory

Zhongxingcheng New Material Co., Ltd. is a manufacturer based in Foshan City, Nanhai District, China. We specialize in producing a variety of roofing materials, including ASA synthetic resin tiles, APVC anticorrosion composite tiles, PVC anti-corrosion tiles, PVC sinks, PVC plates, PC transparent tiles, and are a leading FRP Corrugated Sheet Supplier in China.

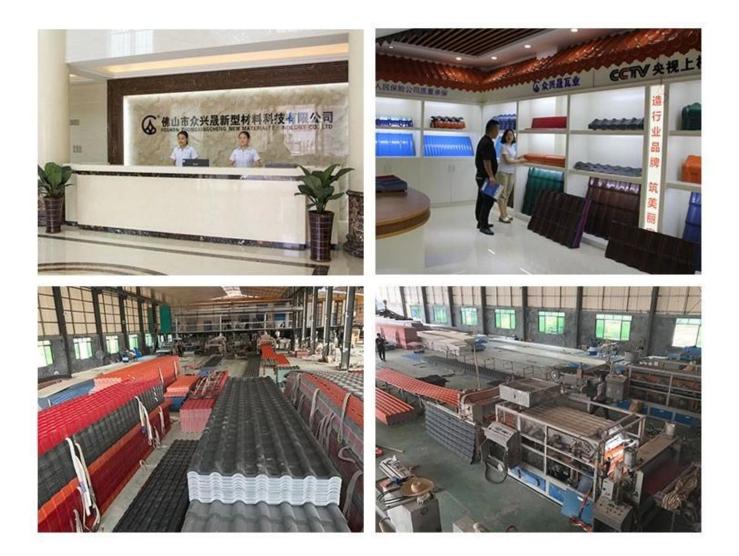

FACTORY REAL SHOT DISPLAY

Professional production to do every step



Sampling and testing eachbatch of products to ensure quality

Х



Good price and good quality



CUSTOM PROCESS

Easy shopping, quality assurance, after-sales rest assured

















Professional and rapid production of multiple production lines





Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing to ensure good quality.





Packaging



FAQ

*Are you manufacturer or trader?

*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

*Can I order the product with i want to profile?

*Of course you can, also we will produce the products according to your detail requests.

*Can you put my company's brand on your products?

*Yes,we are accept OEM&ODM service.But we need some information about your company.

*How to install the roofing sheet?

*Please contact our service staff, we have installation video for you.

*Can you provide samples for me to open the market and test quality?

*Yes,we can.We can provide free samples to you ,Could you pay the shipping cost?Please contact our service staff.

*What is your trade term?

- * Payment: T/T 30% in advance, balance before shipment.
- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen