

## Product show

The main raw material is PVC with ultraviolet resistant agent and additives. Through scientific compounding, made with advanced technology. [House Roof Tiles Manufacturer China](#)

- 1.Light weight
- 2.Environmental protection
- 3.waterproof and fireproof
- 4.Easy-installation
- 5.Anti-corrosion
- 6.Good sound insulation



zxc roofing tile industry

# After sales less is really good

Ten years of slow fading, **30** years of warranty

## GOOD CHOICE

Our advantage



Intimate service,  
strong product  
supply capacity



product  
available



A variety of  
styles and  
specifications  
sufficient stock



Support  
customization



Specifications and sizes  
can be consulted with  
customer service in  
detail, and quotations  
can be customized



Worry-free  
after sales



Manufacturers  
wholesale quality  
assurance, affordable  
prices, worry-free  
after-sales

|                        |                                                                                 |
|------------------------|---------------------------------------------------------------------------------|
| Length                 | 1m-12m                                                                          |
| Surface                | Matt                                                                            |
| Weight                 | 3.0-6.8kg/m                                                                     |
| Width                  | 1130mm/ 1080mm/ 1050mm/ 980mm/ 930mm                                            |
| Warranty               | 30Years                                                                         |
| Model Number           | ASA PVC Composite Sheet                                                         |
| Function               | Insulation, Flame Retardant, Heat Insulation, Anti-corrosion, Impact Resistance |
| Shape                  | round wave, big round wave, trepezoidal wave                                    |
| Fire Protection Rating | B1                                                                              |
| Temperature            | —10 Degrees Celsius to 70 Degrees Celsius                                       |
| Color                  | White, Blue, Gray, Red, customizable                                            |
| Layers                 | 2 or 3 layers                                                                   |
| Color Lasting          | 10 Years no Fading                                                              |

Click [pvc roof tile supplier china](#) to learn more

# SOURCE MANUFACTURER #

---

>



/

# THE TROUBLES OF TRADITIONAL ROOF TILES

#

other products

×



**severely faded**

Wind and sun soften and fade



**There is a gap**

Uneven with gaps, leaking rain



**uneven color**

Weathered uneven color  
phenomenon




**Fragile**

Fragile and complicated  
to install

## our products ✓

Ten years of slow fading, 30 years of warranty

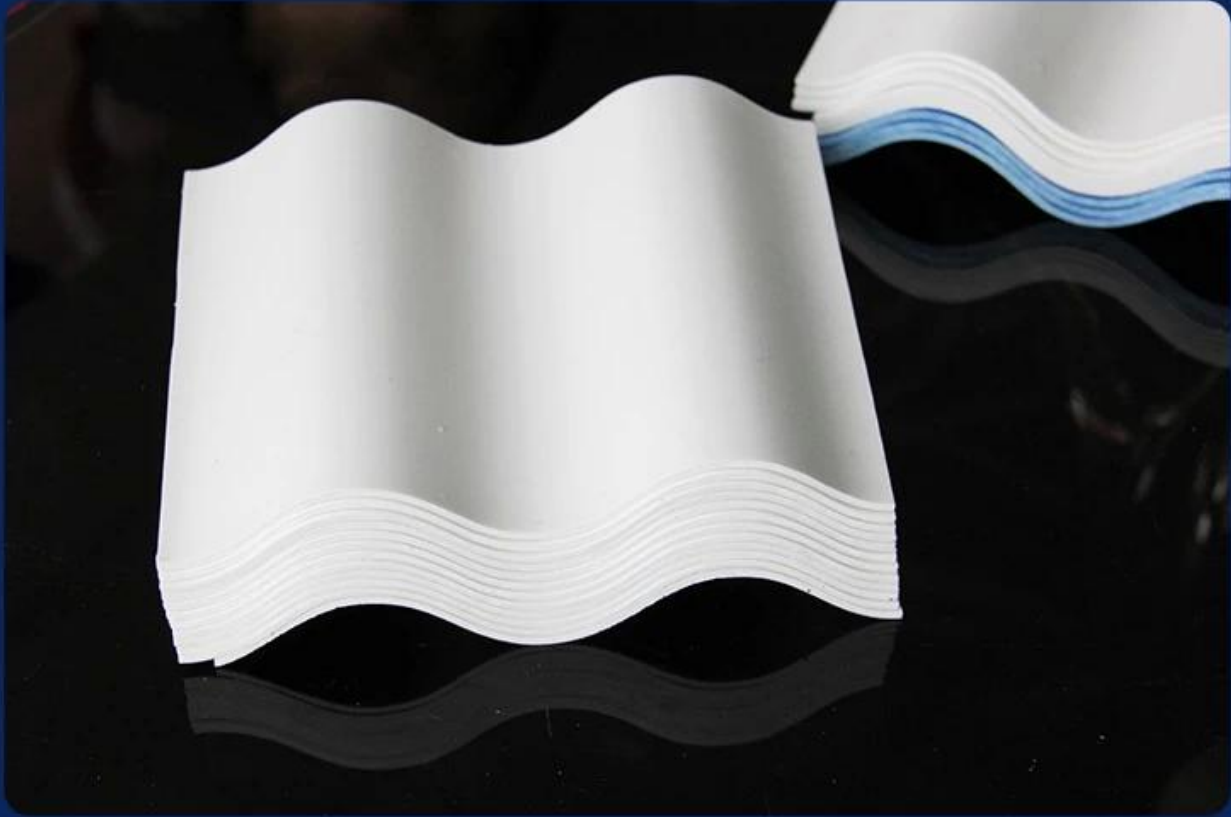

**Uniform color, durable and not easy to fade**  
Good quality, durable and bright.




high toughness



Strong pressure resistance

Effective insulation



good sound insulation



**thermal and acoustic insulation high-quality**  
Good sound insulation effect in case of external noise



**preservative**  
Anti-acid and alkali



**flame retardant performance**  
b1 class fire performance

# PRODUCT PARAMETERS

---

#

>



|                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------|
| <b>thickness:</b> 1.0mm-3.0mm                                                                                                    |
| <b>width:</b> 1130/980/900/840/1080mm                                                                                            |
| <b>length:</b> customizable                                                                                                      |
| <b>waveform:</b> big hang, small wave                                                                                            |
| <b>type:</b> asa plastic roofing tile                                                                                            |
| <b>Be applicable:</b> Factory buildings, ware houses, markets, residences, market roads, canopies, chemically corrosivefactories |

# A variety of colors, optional to build different architectural styles

More colors can be customized




<Mlight yellow>



<dark blue>




<grass green>

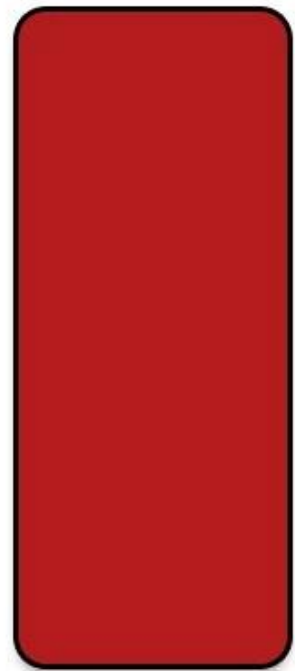

<Beige>

# Accessories and Installation Diagram

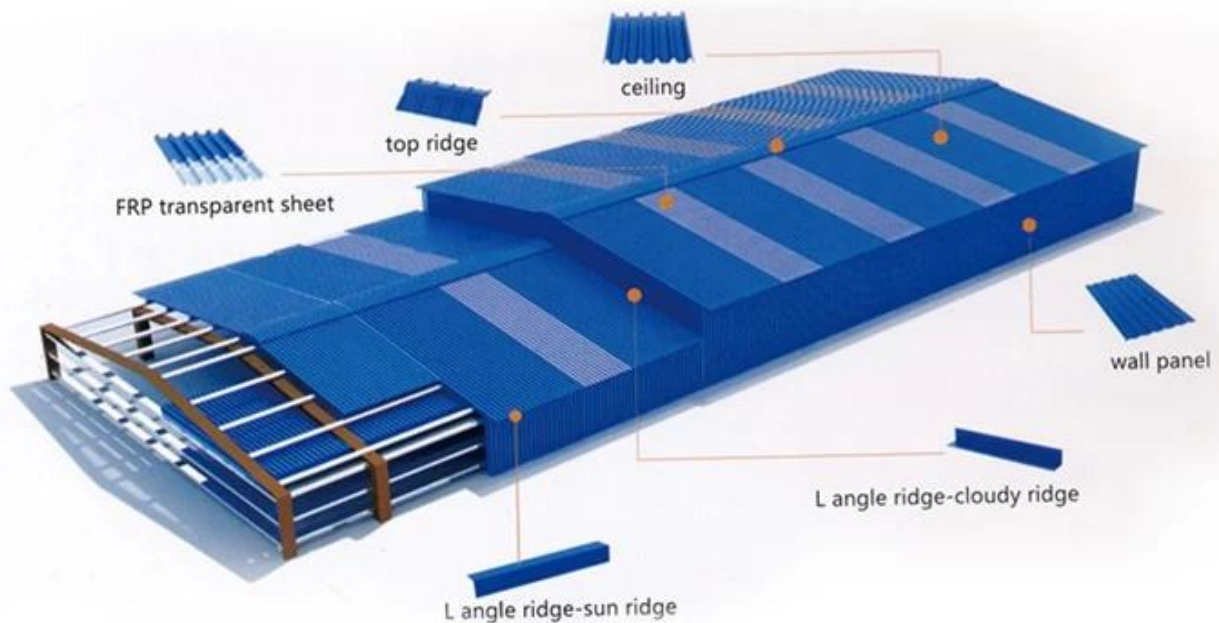

\*pvc plastic waterproof cap, used with self-tapping screws to fix the tile on the skeleton



# CUSTOMER CASE SHOW #





Our Factory

Zhongxingcheng New Material Co., Ltd. is located in Foshan City, Nanhai District China is a manufacturer specializing in the production of ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.



## Quality inspection instruments strictly control the quality


Each batch of products has undergone rigorous testing.




Gravity testing



Hardness testing

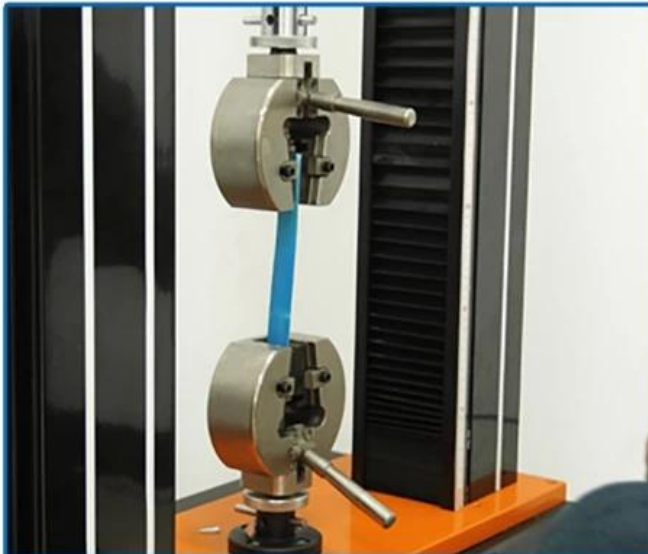

Tensile force testing

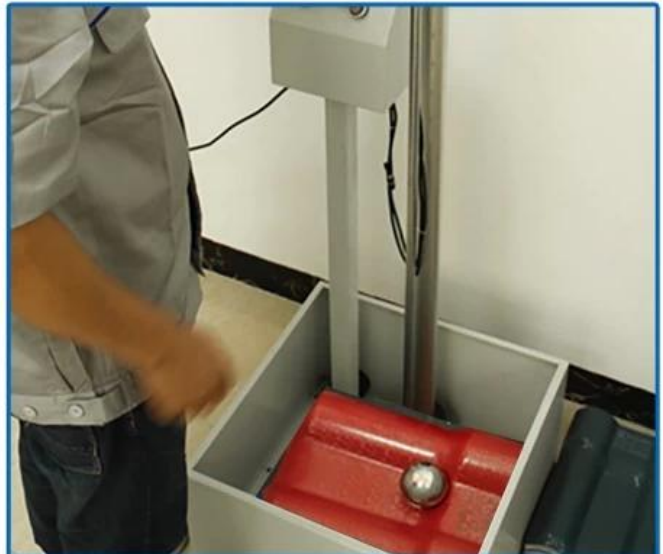

Impact resistance testing

Factory display



In-stock inventory



Own production line



Own production line



# Exhibition



# Certificate

# Official quality inspection, quality assurance

Multiple quality inspection and testing  
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质量监督检测中心  
检验报告

报告号: QB-049-02  
样品号: G14-WT1489

| 序号 | 检测项目 | 单位                | 标准要求                                              | 检测结果 | 判定 |
|----|------|-------------------|---------------------------------------------------|------|----|
| 1  | 外观   | —                 | 表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、破孔、翘曲、气泡、杂质、斑点、变色点     | 符合   | 合格 |
| 2  | 密度   | g/cm <sup>3</sup> | 1.45~1.65                                         | 1.64 | 合格 |
| 3  | 弯曲性能 | mm                | 支撑跨度100mm, 载荷40kg, 允许挠度≤50                        | 15   | 合格 |
| 4  | 冲击性能 | —                 | 1kg重钢球, 1.5m, 自由落体, 冲击试样无裂纹, 试样经冲击试验后不得产生贯穿的孔穴或裂纹 | 符合   | 合格 |
| 5  | 氧指数  | %                 | ≥40                                               | 43   | 合格 |

审核: 王博斌  
主检: 陈德强

**全部合格**

佛山市质  
Foshan Supervision

## Packaging



## FAQ

**\*Are you manufacturer or trader?**

\*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\*Can I order the product with i want to profile?**

\*Of course you can, also we will produce the products according to your detail requests.

**\*Can you put my company's brand on your products?**

\*Yes, we accept OEM&ODM service. But we need some information about your company.

**\*How to install the roofing sheet?**

\*Please contact our service staff, we have installation video for you.

**\*Can you provide samples for me to open the market and test quality?**

\*Yes, we can. We can provide free samples to you, Could you pay the shipping cost? Please contact our service staff.

**\*What is your trade term?**

\* Payment: T/T 30% in advance, balance before shipment.

- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan, Guangzhou, Shenzhen