

## Product show

### **ZXC ([FRP Corrugated Sheet Supplier China](#)) Excellent Anti-corrosion performance:**

The products resist various acids, alkalis and peroxides, especially suitable for application in the coastal areas and corrosive places.

### **Superior light transmission:**

It is between 60-85%. Light through FRP lighting sheet scatters and is mild. It will not form a light band so as to make the indoor brighter.

### **High quality:**

Relative density between 1.3-2.0, only carbon steel 1 / 4-1 / 5, the tensile strength is close, even more than carbon steel, and the specific strength can be compared with the high alloy steel.

FRP load test, invited a weight of about 80 kg of men standing on the span of 130 cm of the Fiberglass clear roofing sheet , the test successfully completed. The test proves that the quality of FRP tile meets the national standard.

### **Weather fastness, ageing resistance:**

Long exposure to the atmosphere, the sun radiation, the product integrity, no deformation, the useful life of up to 10years.

Our ZXC custom has price advantages, feel free to contact us for sales or leave us a message!

**Click [Clear Plastic Roof Sheets Supplier China](#) to learn more**



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

# FRP LIGHTING ROOF TILE




***10-year  
warranty***



Product name	Easy And Fast Installation Types Of Balcony Clear Plastic Roof Covering	
Model	frp-01	
Surface	Smooth surface	
Length	6000mm , 11800mm or customized	
Type	Trapezoidal type,Round Wave Type	
Overall width	930mm	
Effective width	840mm	
Purlin spacing	660mm	
Thickness	1.0±0.1mm	
	1.2±0.1mm	
	1.5±0.1mm	
	2.0±0.1mm	
Weight	1.7±0.1kg/m <sup>2</sup>	
	2.1±0.1kg/m <sup>2</sup>	
	2.6±0.1kg/m <sup>2</sup>	
	3.0±0.1kg/m <sup>2</sup>	
<b>Container Load capacity</b>		
<b>SQ.M./20 FCL (21 Tons)</b>	<b>SQ.M./40 FCL (26 Tons)</b>	
12000 m <sup>2</sup>	15000 m <sup>2</sup>	
10000 m <sup>2</sup>	12300 m <sup>2</sup>	
8000m <sup>2</sup>	10000 m <sup>2</sup>	
7000m <sup>2</sup>	8600m <sup>2</sup>	

# CUSTOMER CASE SHOW

Has more than ten years of production experience

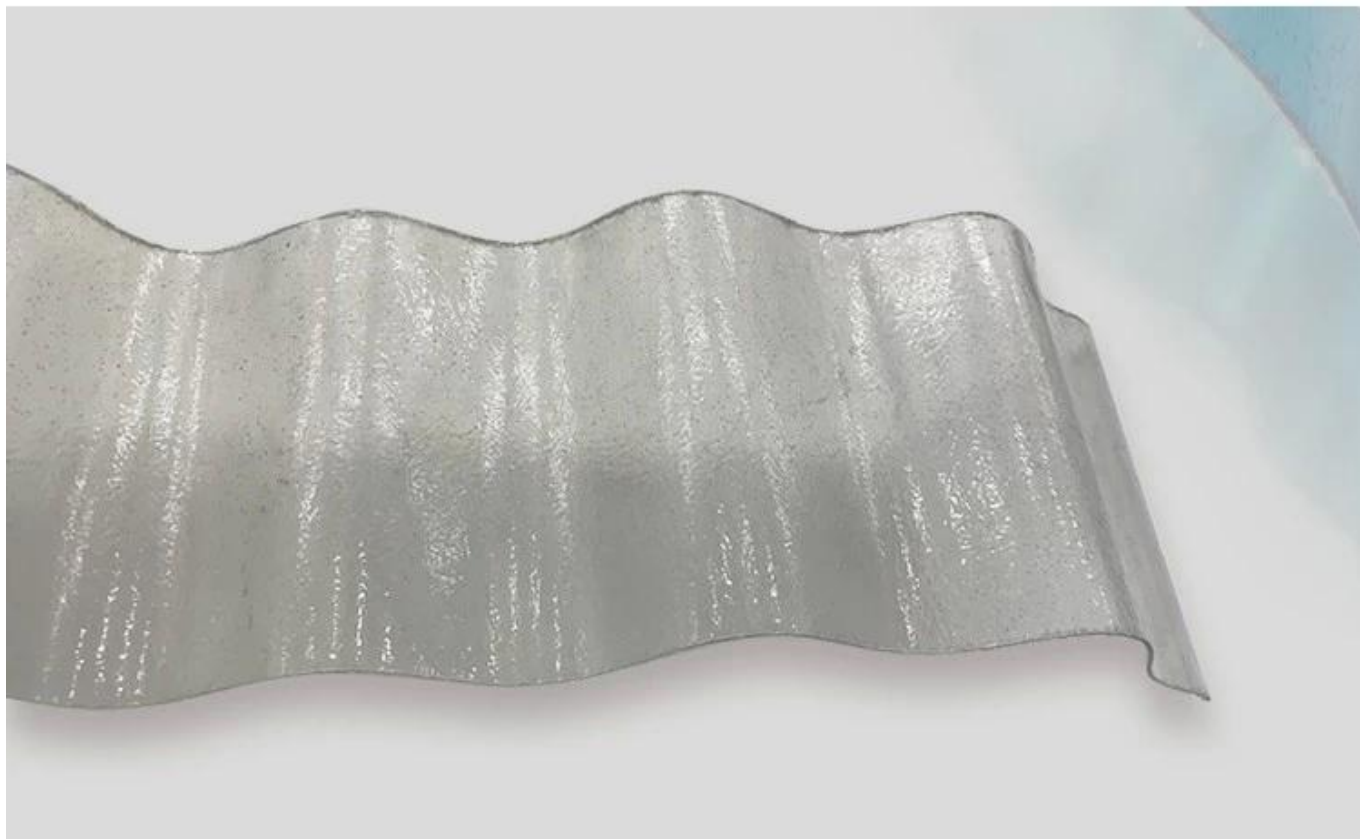

thickness:	1.0mm-2.8mm
width:	1130/ 930/ 900/ 840mm
length:	customizable
waveform:	big hang, small wave
place of origin:	foshan
Be applicable:	Factory buildings, warehouses, marketsresidences, market roads, awnings, canopies, building roofingworks, ceramic factories, etc.

# A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green



Beige

---

# PRODUCT DISPLAY

Authentic product photography highlights the quality of details



# CUSTOMER CASE SHOW

More than ten years of production experience



# APPLICABLE SCENE DISPLAY

scope of application

~



## *planting shed*

Rainproof, constant temperature  
moisturizing space, transparent



## *roof*

Good light transmission  
performance, no rain leakage



## *Villa shed*

Bright colors, more class



## *Recreation area*

Color unevenness due to weathering



# SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered



*sound  
insulation*

*Anti  
-corrosion*

*insulation*

*High  
temperature  
resistance*

*anti  
-stress*



# “ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



**01** High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



**02** Strong bearing capacity, more impact resistance

Add high quality glass fiber



**03** Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



## **04** Impact resistance

Shock resistant, not easy to break



## **05** Good flame retardant performance

Maintain stable performance in the temperature range of  $-40^{\circ}$ - $120^{\circ}$  without softening




## Our Factory

Zhongxingcheng New Material Co., Ltd. is located in Foshan City, Nanhai District China is a manufacturer specializing in the production of ASA synthetic resin tile, APVC anti-corrosion composite tile, PVC anti-corrosion tile, PVC sink, PVC plate, Transparent FRP Roof Sheet, PVC, PC transparent tile.



# FACTORY REAL SHOT DISPLAY

Professional production to do every step

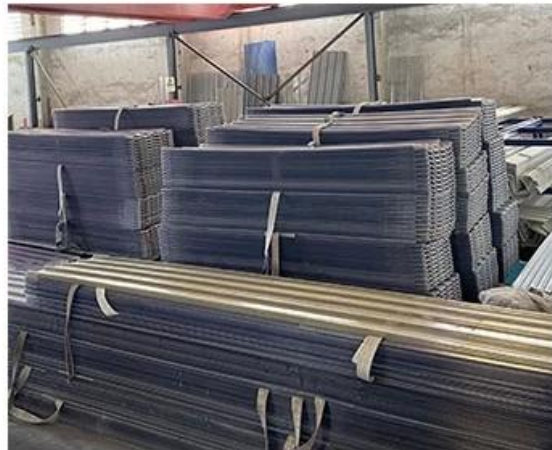

# Sampling and testing each batch of products to ensure quality

X



DISPLAY

# CUSTOM PROCESS

Easy shopping, quality assurance,  
after-sales rest assured



01

## ONLINE CONSULTATION

Provide professional product  
consultation



02

## PROVIDE PRICING

Provide reasonable price for  
product performance

03

## PREPAID CUSTOMIZATION

Deposit in advance according  
to different proportions







— **04** —

ORDER  
PRODUCTION

Professional and rapid production  
of multiple production lines

— **05** —

AFTER  
DELIVERY

Intimate and assured after-sales  
service



Exhibition



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



## Packaging



## FAQ

**\*Are you manufacturer or trader?**

\*Yes, we are real Manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\*Can I order the product with i want to profile?**

\*Of course you can, also we will produce the products according to your detail requests.

**\*Can you put my company's brand on your products?**

\*Yes,we are accept OEM&ODM service.But we need some information about your company.

**\*How to install the roofing sheet?**

\*Please contact our service staff, we have installation video for you.

**\*Can you provide samples for me to open the market and test quality?**

\*Yes,we can.We can provide free samples to you ,Could you pay the shipping cost?Please contact our service staff.

**\*What is your trade term?**

\* Payment: T/T 30% in advance, balance before shipment.

- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan,Guangzhou,Shenzhen