

## Product show

Folha de telhado de onda anticorrosiva ZXC estilo espanhol [Telhas Upvc à venda na China](#)

Projeto	Estilo espanhol
Cor duradoura	10 anos sem desbotamento
Comprimento	personalizado
Grossura	1,8 mm, 2,0 mm, 2,2 mm, 2,5 mm, 2,8 mm, 3,0 mm
Largura total	1130 mm
Largura efetiva	1000/1050 mm
Espaçamento da terça	660 mm
Camadas	3 camadas
Superfície	Superfície em relevo/lisa



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types


## 1130 corrugaetd sheets




## 1130 trapezoidal sheets




## 900 high wave

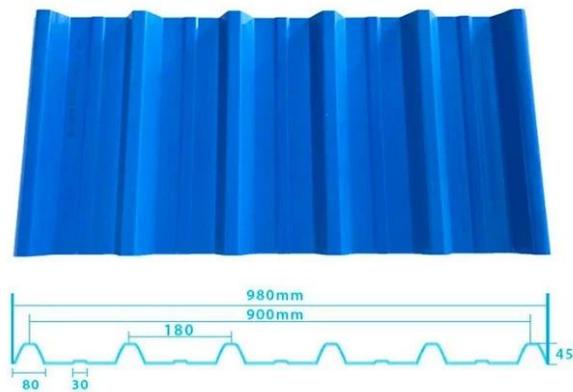

## 980 high wave

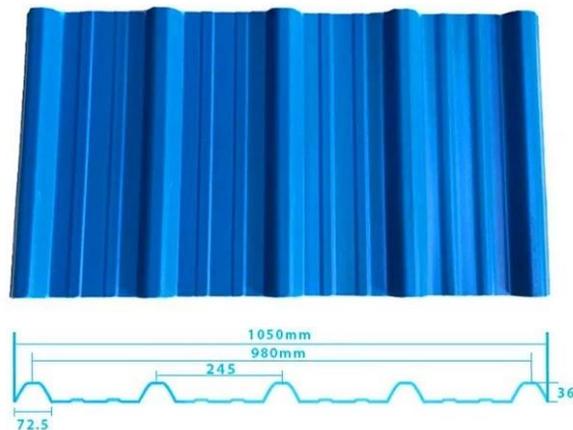

# PVC accessories

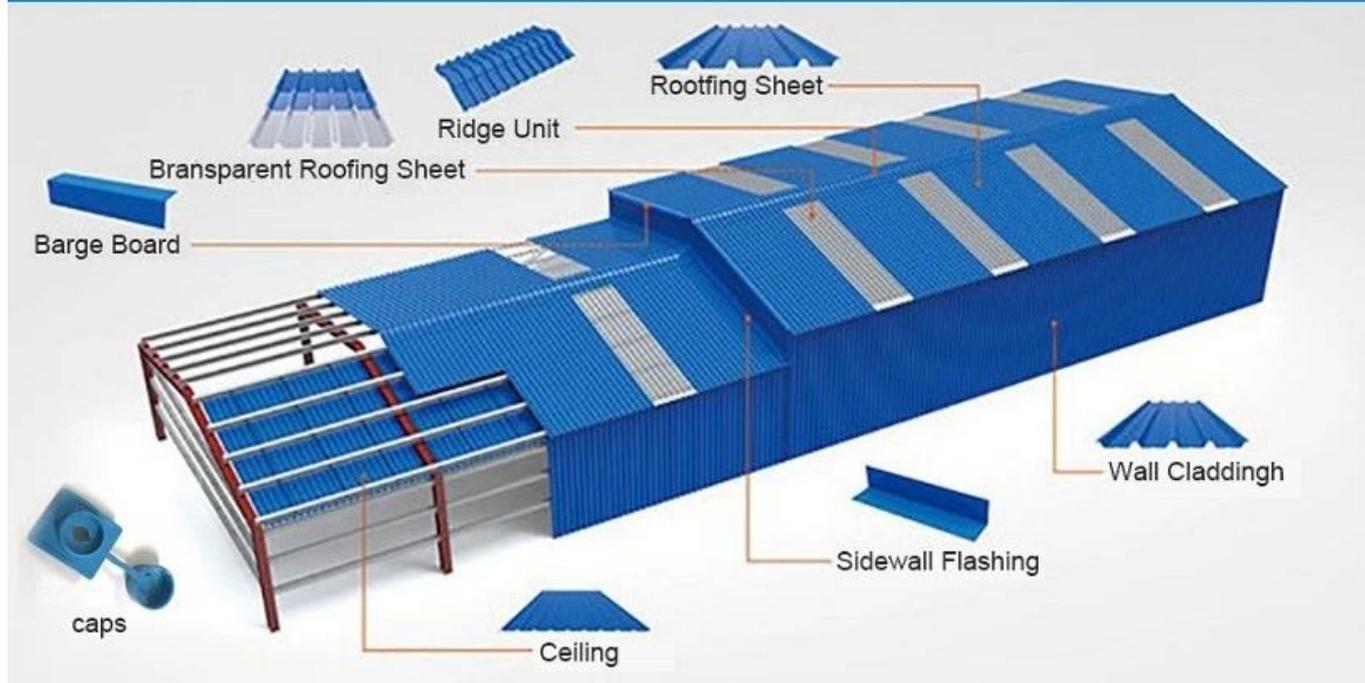


Clique [Fornecedor de telhas Upvc China](#) aprender mais

# Our Factory



# Engineering case

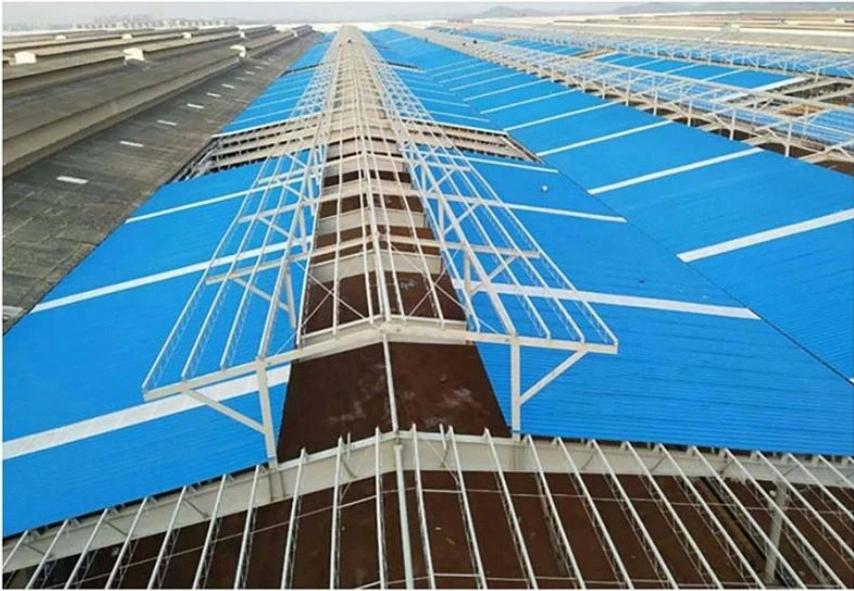

# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and both sides are straight.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.12	Pass
4	Slip-resistance	1/100	---	170	Pass
5	Flexure strength	Mpa	≥ 20	26	Pass
6	Flexural modulus	%	≥ 20	32	Pass
7	Water absorption (1h, 3h, 7d)	---	No significant change in water absorption parameters.	Confirmed	Pass
8	Acid resistance (3%, 5%, 10%)	---	No obvious color change in acid resistance parameters.	Confirmed	Pass
9	Alkali resistance (5%, 10%, 20%)	---	No obvious color change in alkali resistance parameters.	Confirmed	Pass
10	Freeze-thaw resistance (5 cycles)	---	No cracks, delamination, flaking, peeling or spalling.	Confirmed	Pass
11	Impact resistance (1kg, 3kg)	---	No cracks or significant damage to the surface layer and the substrate.	Confirmed	Pass
12	Load performance (1h, 2h, 3h)	---	---	1000	Pass
13	Chemical change in weight	g/m <sup>2</sup>	---	2.40	Pass
14	Chemical change in surface	---	---	0.2	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Flexure strength	Mpa	≥ 20	26	Pass
4	Flexural modulus	%	≥ 20	32	Pass
5	Water absorption (1h, 3h, 7d)	---	No significant change in water absorption parameters.	Confirmed	Pass
6	Acid resistance (3%, 5%, 10%)	---	No obvious color change in acid resistance parameters.	Confirmed	Pass
7	Alkali resistance (5%, 10%, 20%)	---	No obvious color change in alkali resistance parameters.	Confirmed	Pass
8	Freeze-thaw resistance (5 cycles)	---	No cracks, delamination, flaking, peeling or spalling.	Confirmed	Pass
9	Impact resistance (1kg, 3kg)	---	No cracks or significant damage to the surface layer and the substrate.	Confirmed	Pass
10	Load performance (1h, 2h, 3h)	---	---	1000	Pass
11	Chemical change in weight	g/m <sup>2</sup>	---	2.40	Pass
12	Chemical change in surface	---	---	0.2	Pass



# Exhibition



# Packaging



# FAQ

**\*Você é fabricante ou comerciante?**

\*Sim, somos fabricantes reais, há muitas fotos na introdução de nossa empresa. Se você precisar de outro produto especial, faremos o nosso melhor para ajudá-lo, para que possamos construir um relacionamento comercial de longo prazo.

**\*Posso encomendar o produto com o perfil que desejo?**

\*Claro que pode, também produziremos os produtos de acordo com suas solicitações detalhadas.

**\*Você pode colocar a marca da minha empresa em seus produtos?**

\*Sim, aceitamos serviço OEM e ODM. Mas precisamos de algumas informações sobre sua empresa.

**\*Como instalar a telha?**

\*Entre em contato com nossa equipe de atendimento, temos vídeo de instalação para você.

**\*Você pode fornecer amostras para eu abrir o mercado e testar a qualidade?**

\*Sim, podemos. Podemos fornecer amostras grátis para você.

**\*Você poderia pagar o custo de envio?**

Entre em contato com nossa equipe de atendimento.

**\*Qual é o seu termo comercial?**

\* Pagamento: T/T 30% adiantado, saldo antes do envio.

- Prazo de produção: Dentro de 7 dias úteis após o depósito de 30%
- Porto de embarque FOB: Foshan, Guangzhou, Shenzhen