

# Product show

Design: estilo espanhol

Duração da cor: 10 anos sem desbotamento

Comprimento: personalizado

Espessura: 1,8 mm, 2,0 mm, 2,2 mm,

2,5 mm, 2,8 mm, 3,0 mm

Largura total: 1130 mm

Largura efetiva: 1000/1050mm

Espaçamento entre terças: 660 mm

Camadas: 3 camadas

Superfície: Em relevo/Superfície lisa



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types

## 1130 corrugaetd sheets



## 1130 trapezoidal sheets




## 900 high wave



## 980 high wave



# PVC accessories

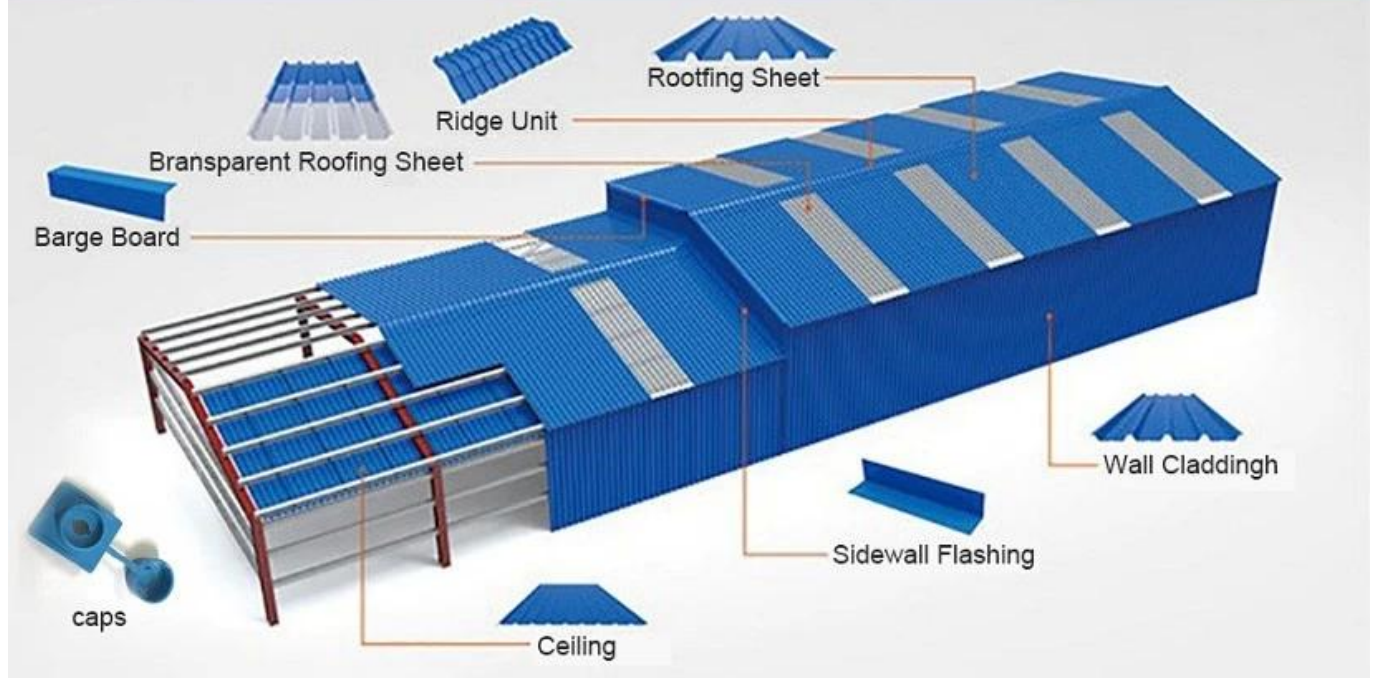

ZXC New Material Technology Co., Ltd. Nossos produtos incluem folhas de PVC, telha de resina sintética ASA, telhas de FRP, calha, telhas de upvc etc. Bem-vindo Contate-nos [.](#)

# Our Factory



# Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Remark	
1	Appearance	—	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without burr. Warpage should be less, and both sides are straight.	Confirmed	Pass	
2	Walk distance	mm	≤ 10	8	Pass	
3	Thickness deviation	mm	± 0.2	0.12	Pass	
4	Slip-resistance	1/100	—	170	Pass	
5	Flexure strength	Mpa	≥ 20	31	Pass	
6	Impaction of break	%	≤ 20	11	Pass	
7	Waterfall test impact	J/kg	—	—	Confirmed	Pass
8	Acid resistance	—	No obvious color change or delamination phenomenon.	—	Confirmed	Pass
9	Alkali resistance	—	No obvious color change or delamination phenomenon.	—	Confirmed	Pass
10	Water absorption	mm	≤ 18	12	Pass	
11	Change index	%	≤ 0.1	0.06	Pass	

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Remark	
1	Appearance	—	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass	
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass	
3	Flexure strength	Mpa	≥ 20	26	Pass	
4	Slip-resistance	%	≥ 20	40	Pass	
5	Flexural strength	Mpa	≥ 20	33	Pass	
6	Flexural ductility modulus	Mpa	≥ 2000	3600	Pass	
7	Density	g/cm <sup>3</sup>	≥ 2.35	2.38	Pass	
8	Water absorption	%	≤ 18	10	Pass	
9	Waterfall test impact	J/kg	—	—	Confirmed	Pass
10	Acid resistance	—	No obvious color change or delamination phenomenon.	—	Confirmed	Pass
11	Alkali resistance	—	No obvious color change or delamination phenomenon.	—	Confirmed	Pass
12	Water absorption	mm	≤ 18	10	Pass	
13	Change index	%	≤ 0.1	0.06	Pass	
14	Flexural strength	Mpa	≥ 20	26	Pass	
15	Flexural ductility modulus	Mpa	≥ 2000	3600	Pass	



# Exhibition



# Packaging





## FAQ

**\*Você é fabricante ou comerciante?**

\*Sim, somos fabricantes reais, há muitas fotos na apresentação da nossa empresa. Se você precisar de outro produto especial, faremos o possível para ajudá-lo, para que possamos construir um relacionamento comercial de longo prazo.

**\*Posso encomendar o produto com o perfil que desejo?**

\*Claro que você pode, também produziremos os produtos de acordo com suas solicitações detalhadas.

**\*Você pode colocar a marca da minha empresa em seus produtos?**

\* Sim, aceitamos serviço de OEM e ODM. Mas precisamos de algumas informações sobre sua empresa.

**\* Como instalar a telha?**

\* Entre em contato com nossa equipe de atendimento, temos um vídeo de instalação para você.

**\*Você pode fornecer amostras para eu abrir o mercado e testar a qualidade?**

\* Sim, nós podemos. Nós podemos fornecer amostras grátis para você.

**\*Você poderia pagar o custo de envio?**

Entre em contato com nossa equipe de atendimento.

**\* Qual é o seu termo comercial?**

\* Pagamento: T/T 30% adiantado, saldo antes do envio.

? Prazo de entrega da produção: dentro de 7 dias úteis após o depósito de 30%

? Porto de embarque FOB: Foshan, Guangzhou, Shenzhen