


Product show

ZXC ASA [Synthetic Resin Roof Tile](#) Wholesales, If your order matches our stock size details, we can faster delivery time.



1. A variety of raw materials by a certain percentage mixing, into the hopper
2. The mixed raw materials are pre-formed and heated to become flat tiles
3. Then through the mold pressure, plastic molding, cooling, through the traction machine slowly introduced
4. To achieve the length of customer needs cut off. after artificial out

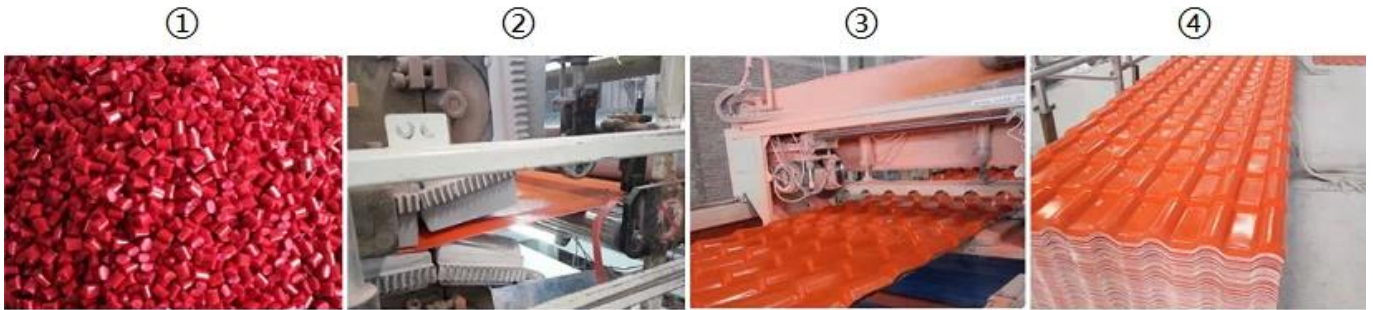



Nome do Produto	Spanish Style ASA Roof Tile
Marca	ZXC
Lugar de origem	Foshan city,Guangdong province,China(Mainland)
Material	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
Garantia	25 anos
Certificação	ISO9001 / SGS / CE
Minimum Order Quantity	100 square meter
Prazo de entrega	1x20GP for 6 days,1x40GP for 7 days
capacidade de fornecimento	We have 8 produce lines,about 13500 square meter every day
Termos de pagamento	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,

Envio	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Pacote	Pallet or PE bag
Porta	Guangzhou / Shenzhen / Foshan
Inscrição	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc

Número do modelo	#1050-160-30
Tipo	Spanish Style
Largura total	1050mm
Effective Width	960mm
Grossura	2.3mm / 2.5mm / 2.8mm / 3.0mm
Comprimento	Deve ser um múltiplo de seção
Cor	Orange / Red / Grey / Sky blue / Dark green/Personalizado
Wave Spacing	160mm
Altura da onda	30mm
Section Length	219mm
Purlin Spacing	660mm

More Types



Estrutura

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom: The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

Funcionalidade

• Long-lasting Color (at least 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

• Excellent Anti-corrosion performance

• Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.

• Good Waterproofing Performance

• Synthetic Resin Tile selects highly weather-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

• Strong Fire Resistance

• Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GB8624-2006 standard.

• Excellent Heat Insulating Property

• The heat conductivity coefficient is 0.325w/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore without considering adding heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• Good sound insulation

• Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

Clique em [ASA PVC Roof Tile Suppliers](#) Para saber mais

resin roof tile accessories



▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory




Engineering case



Certificate



Packaging



Grossura		2.3mm	2.5mm	2.8mm	3.0mm
Peso (kg/SQM)		4.6	5.0	5.6	6.0
Container Load Capacity	20. GP (21Tons)	4500	4200.	3750	3500
	40.GP (26 Tons)	5600	5200	4600	4300

Funcionalidade:

1. ExcllentAnti-corrosãoatuação
- 2.GoodÀ prova d'água atuação
- 3.fire.Resistência
4. Teat.isolamento
- 5.ins.ulation.
- 6.Fastura,envelhecimentoresistência

Pacote:Nuoupadrãoexportarpacote

FAQ

***Você é fabricante ou comerciante?**

*Sim, somos fabricante real, Há muitas fotos em nossa introdução da empresa.Se você precisar de outro produto especial, faremos o nosso melhor para ajudá-lo, para que possamos construir um relacionamento comercial de longo prazo.

***Posso pedir o produto com que eu quero o perfil?**

*Claro que você pode, também produziremos os produtos de acordo com suas solicitações de detalhes.

***Você pode colocar a marca da minha empresa em seus produtos?**

*Sim, estamos aceitando serviço OEM & ODM.Mas precisamos de algumas informações sobre sua

empresa.

***Como instalar a folha de telhado?**

*Por favor, entre em contato com nossa equipe de serviço, temos vídeo de instalação para você.

***Você pode fornecer amostras para eu abrir o mercado e teste qualidade?**

*Sim, nós podemos. Nós podemos fornecer amostras grátis para você, você poderia pagar o custo de envio? Por favor, entre em contato com nossa equipe de serviço.

***Qual é o seu termo comercial?**

* Payment: T/T 30% in advance, balance before shipment.

- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan,Guangzhou,Shenzhen