

## Product show

ZXC [China PVC Roofing Manufacturers](#) Custom Modern Fireproof Design  
PVC Roofing Materials

Nome do Produto	PVC anti-corrosion plastic roof sheet
Marca	ZXC
Lugar de origem	Foshan city,Guangdong province,China(Mainland)
Material	Polyvinyl chloride,Calcium powder,other chemical materials
Garantia	10 anos
Certificação	ISO9001 / SGS / CE
Minimum Order Quantity	300 square meter
Prazo de entrega	1x20GP for 6 days,1x40GP for 7 days
capacidade de fornecimento	We have 8 produce lines,about 13500 square meter every day
Termos de pagamento	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,
Envio	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Pacote	Pallet or PE bag
Porta	Guangzhou / Shenzhen / Foshan
Inscrição	Factory,Warehouse,Farm,Market,Aisle.Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant



Carrying capacity



Flame retardant



Not Conduct Electricity



Corrosion Resistance



White



Green



Blue



Yellow

# More Types

## 1130 corrugaetd sheets




## 1130 trapezoidal sheets



## 900 high wave



## 980 high wave

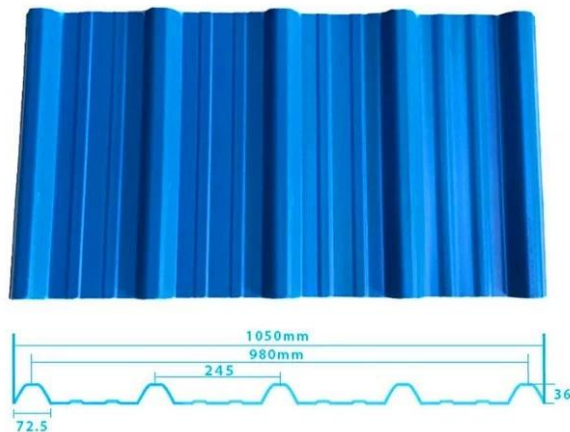

Número do modelo	#1130-210-24
Tipo	Trapezoid type
Largura total	1130mm
Effective Width	1050mm
Grossura	1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm / 3.0mm
Comprimento	5.8meter / 11.8meter / Customized
Cor	White / Blue / Green / Red / Customized
Wave Spacing	210mm
Altura da onda	24mm.
Camada	One layer / Two layers / Three layers

## Funcionalidade

- **Anti-corrosão**

- ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

- **À prova d'água**

- ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

- **Resistência ao fogo**

- ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance  $\geq$  B1 grade.


- **Heat Insulation**

- ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

- **Sound Insulation**


- The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng ([Plastic PVC Roofing Sheet Factory](#)) roofing sheet has a good absorption of the noise effect, noise down 30dB than color steel tile.

# PVC accessories

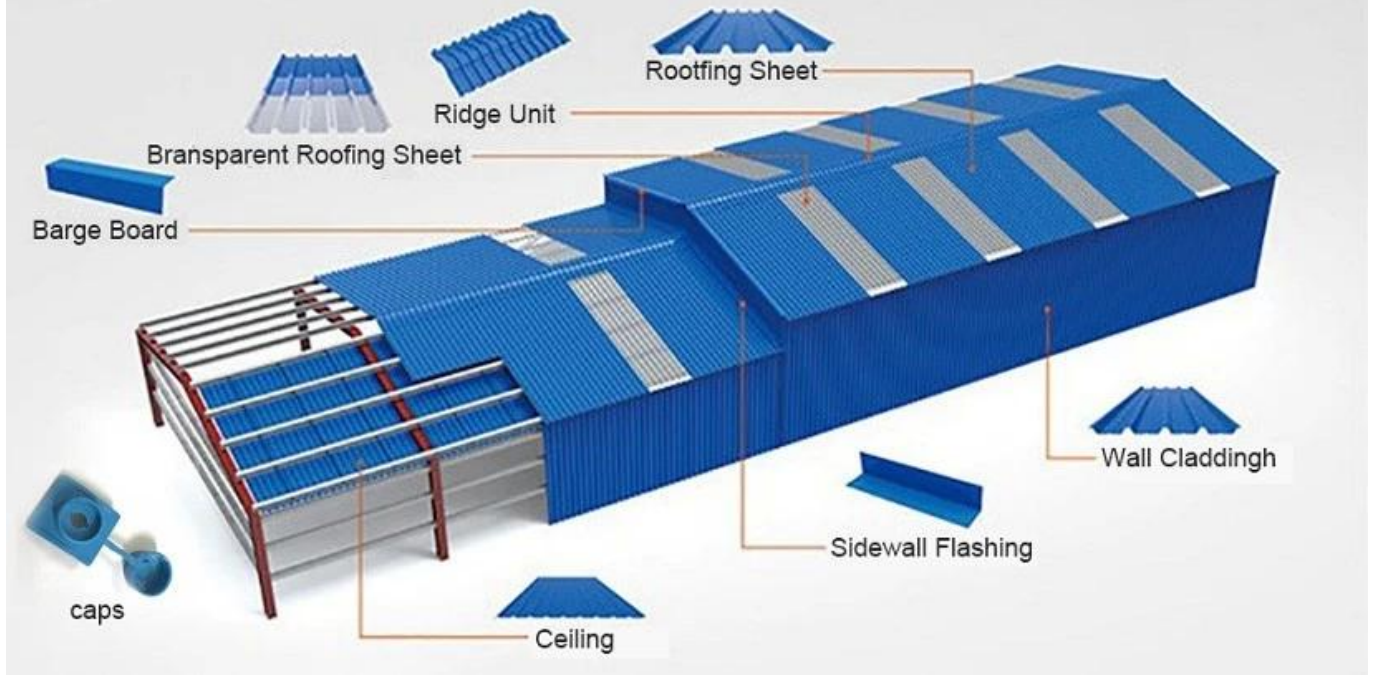



# Our Factory

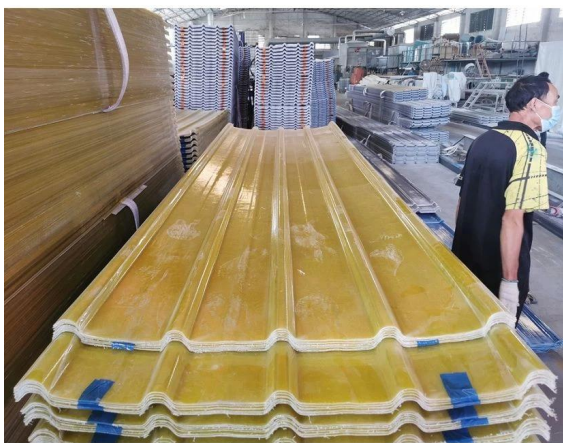



# Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no stains, cracks or visible impurities on the surface. Edge of the tile should be clean without dust. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Slip-resistance	1/100	---	1700	---
5	Flexure strength	MPa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 20°C)	---	No significant cracks or water absorption	Confirmed	Pass
8	Acid resistance (20%, HCl, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (20%, NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Impact resistance (1kg, 1m)	---	No obvious cracks or delamination phenomenon	Confirmed	Pass
11	Change index	%	≤ 0.1	0.05	Pass

Foshan Supervision Testing Centre of Quality and Metrology


Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform color and no visible cracks, pits, scratches, stains, or other defects.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	MPa	≥ 20	28	Pass
4	Flexural strength	MPa	≥ 20	28	Pass
5	Flexural modulus	MPa	≥ 2000	2400	Pass
6	Dimension	mm	± 0.2	0.18	Pass
7	Water absorption (1h, 20°C)	---	No significant cracks or water absorption	Confirmed	Pass
8	Acid resistance (20%, HCl, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
9	Alkali resistance (20%, NaOH, 24h)	---	No obvious color change or delamination phenomenon	Confirmed	Pass
10	Impact resistance (1kg, 1m)	---	No obvious cracks or delamination phenomenon	Confirmed	Pass
11	Change index	%	≤ 0.1	0.05	Pass
12	Water absorption (24h, 20°C)	---	No significant cracks or water absorption	Confirmed	Pass
13	Water absorption (7d, 20°C)	---	No significant cracks or water absorption	Confirmed	Pass
14	Water absorption (28d, 20°C)	---	No significant cracks or water absorption	Confirmed	Pass
15	Change index	%	≤ 0.1	0.05	Pass






# Exhibition

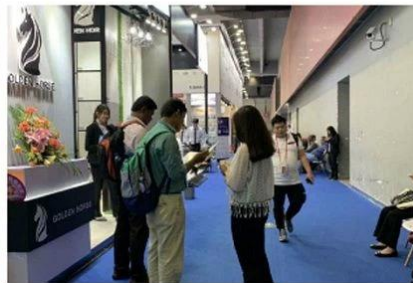



# Packaging



# FAQ

**\*Are you manufacturer or trader?**

\*Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.

**\*Can I order the product with i want to profile?**

\*Of course you can, also we will produce the products according to your detail requests.

**\*Can you put my company's brand on your products?**

\*Yes,we are accept OEM&ODM service.But we need some information about your company.

**\*How to install the roofing sheet?**

\*Please contact our service staff, we have installation video for you.

**\*Can you provide samples for me to open the market and test quality?**

\*Yes,we can.We can provide free samples to you.

**\*Could you pay the shipping cost?**

Please contact our service staff.

**\*What is your trade term?**

- \* Payment: T/T 30% in advance, balance before shipment.
- Production Lead Time: Within 7 working days after 30% deposit
- FOB Shipping Port: Foshan,Guangzhou,Shenzhen