


Nome do Produto	Spanish Style ASA Roof Tile
Marca	ZXC
Lugar de origem	Foshan city,Guangdong province,China(Mainland)
Material	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
Garantia	25 anos
Certificação	ISO9001 / SGS / CE / Test Report
Minimum Order Quantity	100 square meter
Tempo de entrega	1x20GP for 6 days,1x40GP for 7 days
capacidade de fornecimento	We have 8 produce lines,about 13500 square meter every day
Termos de pagamento	T/T , firstly pay 30% deposit,before loading container pay rest of payment
Envio	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Pacote	Pallet or PE bag
Porta	Guangzhou / Shenzhen / Foshan
Inscrição	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc





Purplish Red

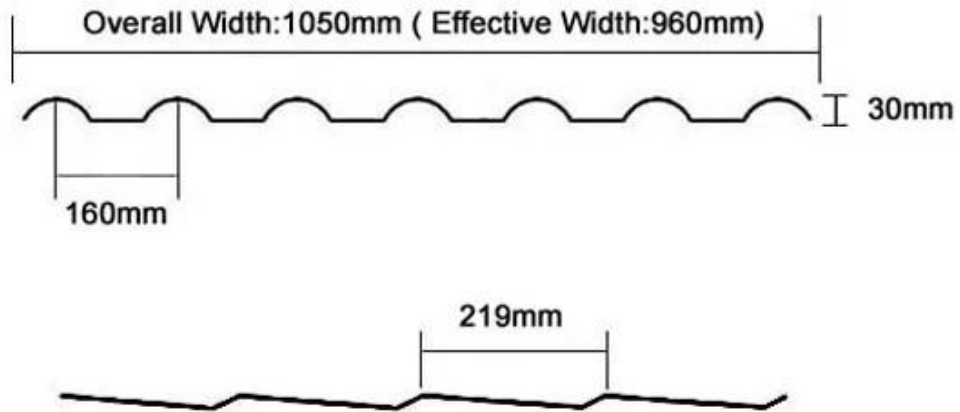

Brick Red



Sky Blue




Black



Dark Green

Número do modelo	#1050-160-30
Tipo	Spanish Style
Largura total	1050mm
Effective Width	960mm
Espessura	2.3mm / 2.5mm / 2.8mm / 3.0mm
Comprimento	Must be a multiple of section
Cor	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Altura da onda	30mm
Section Length	219mm



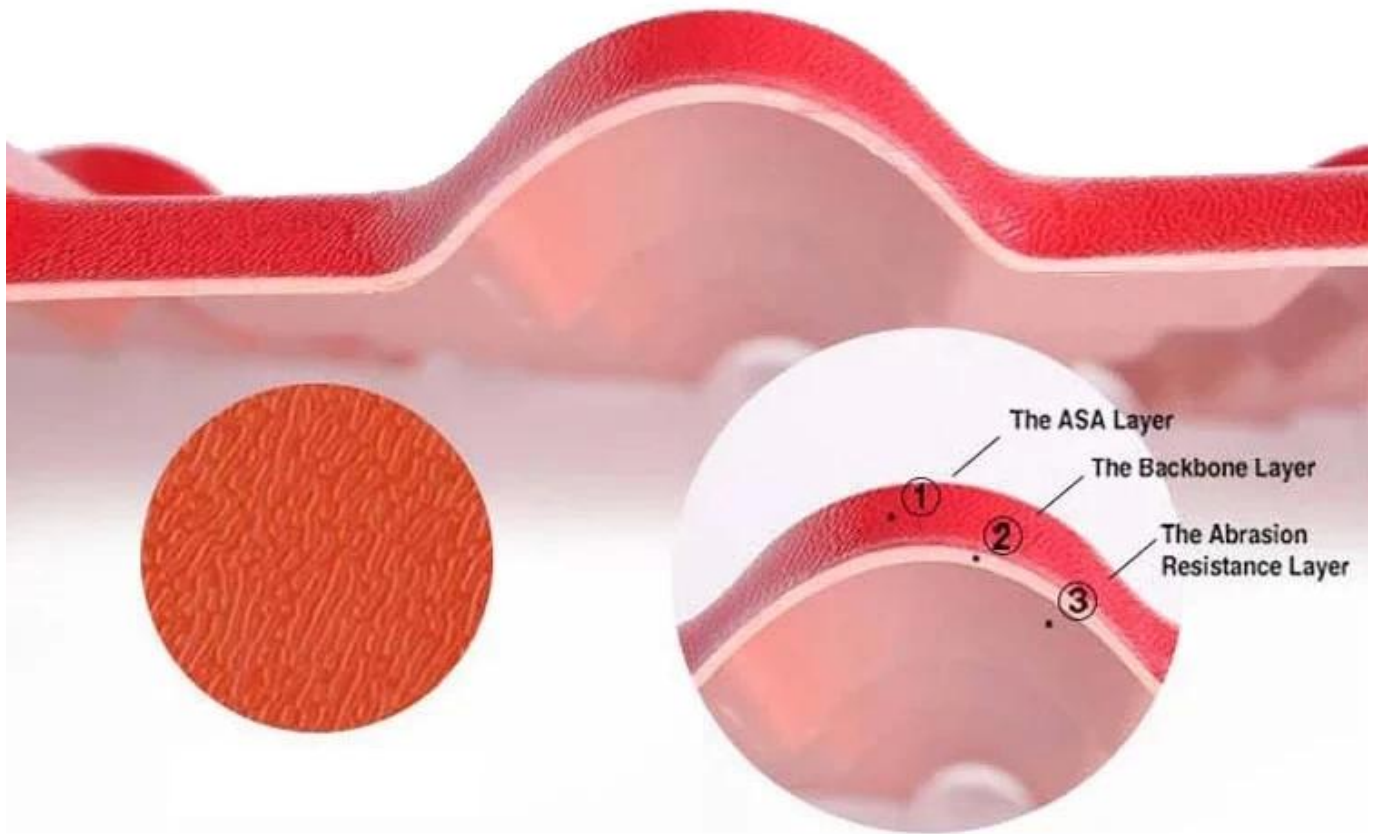

## Estrutura

**Superfície:** Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

**Médio:** The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

**Inferior:** The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

## Característica

### • Long-lasting Color (at least 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

### • Excellent Anti-corrosion performance

• Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.

### • Good Waterproofing Performance

• Synthetic Resin Tile selects highly weather-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

• **Strong Fire Resistance**

• Belonging flame retardant material,with fire resistance  $\geq$  B1 as tested by national authoritative departments according to GBB8624-2006 standard.

• **Excellent Heat Insulating Property**

□The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile.Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• **Good sound insulation**

Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

### Project Case Show





*Warranty 25-years*



*Warranty 25-years*



*Warranty 25-years*





*Warranty 25-years*

## ABOUT US




### **QUALITY, INNOVATION, STRUGGLE, WIN-WIN**

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



# PRODUCTION PROCESS

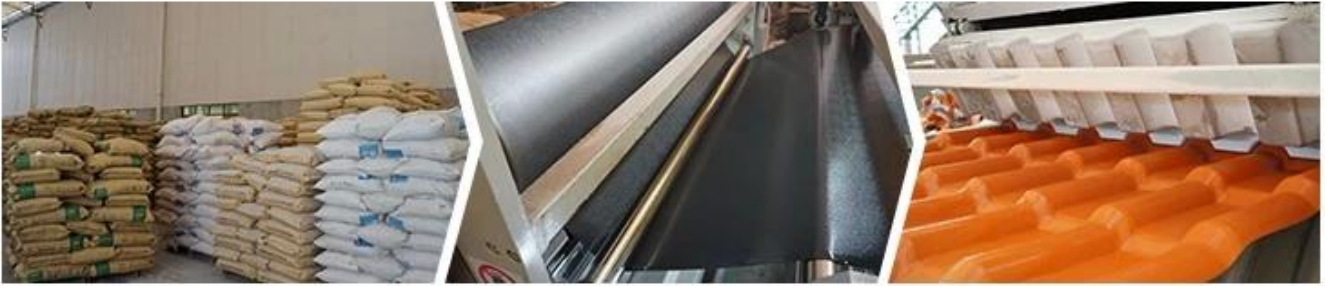

① Raw Materials

② Extrusion

③ Compression Molding



④ Cutting

⑤ Finished Product

⑥ Inspection

# CERTIFICATE

Foshan Supervise Testing Centre of Quality  
Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth with uniform appearance and without cracks, holes, warping, bubbles, and other defects.
2	Surface layer thickness	mm	3.0±0.1
3	Flexure strength	MPa	≥20
4	Flexure stress at break	%	≥30
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥2200
7	Density	g/cm <sup>3</sup>	1.3±0.02
8	Water sorption (24h, 23°C)	%	≤0.10
9	Water sorption (72h, 23°C)	%	≤0.15
10	Water sorption (168h, 23°C)	%	≤0.20
11	Water sorption (240h, 23°C)	%	≤0.25
12	Water sorption (336h, 23°C)	%	≤0.30
13	Water sorption (420h, 23°C)	%	≤0.35
14	Water sorption (504h, 23°C)	%	≤0.40
15	Dimensional change in water	%	≤0.2

Foshan Supervise Testing Centre of Quality  
Test Report

**celab**  
CERTIFICATE

Declaration: This certificate is issued by CELAB on the basis of the test results and the test methods specified in the certificate. It is not a guarantee of the quality of the product. The certificate is valid only for the product and the test results specified in the certificate. It is not a guarantee of the quality of the product.

www.celab.com

DECLARATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On behalf of  
**FOGHAN ZHONG XING CHENG PLASTIC FACTORY**  
Plastic Tile  
Model: ASA-1

Issued For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY  
No. 30, Industry Road, Daxun, Foshan, Guangdong, China

Issued By: BEER (UK) PRODUCT SERVICE LIMITED  
SUE, PLANT 107, 25 INDECOON SQUARE, LONDON, UNITED KINGDOM

CHINA: SF, Binye E, Huanan 3rd Ind Zone, Xixiang, Bai' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016  
Date of Report: Mar. 11, 2016  
Report Number: B-816530176

Appendix 1  
Photo Document

