

# Product show



1. 聚碳酸酯 (PC) 原料

2. 聚碳酸酯 (PC) 原料 - 擠出機





3. 聚碳酸酯 (PC) 原料 - 擠出機

4. 聚碳酸酯 (PC) 原料 - 擠出機

產品名稱	ASA 聚碳酸酯
規格	ASA 聚碳酸酯
原料	聚碳酸酯 (PC) 原料 (聚碳酸酯)
顏色	聚碳酸酯 (PC) 原料 聚碳酸酯 (PC) 原料, 聚碳酸酯 (PC) 原料, 聚碳酸酯 (PC) 原料
厚度	25 mm
標準	ISO9001/CE
重量	100 kg
包裝	1x20GP 包裝 6 個 1x40GP 包裝 7 個
價格	價格 8 價格 13500 價格
交貨	T / T 價格 30% 價格
運輸	價格 Full Container Load (FCL) 價格 (LCL) 價格
材料	聚碳酸酯 (PC) 原料 PE
規格	聚碳酸酯 (PC) 原料/聚碳酸酯 (PC) 原料
原料	聚碳酸酯 (PC) 原料, 聚碳酸酯 (PC) 原料, 聚碳酸酯 (PC) 原料, 聚碳酸酯 (PC) 原料
產品	#1050-160-30
規格	聚碳酸酯 (PC) 原料
原料	1050
規格	960





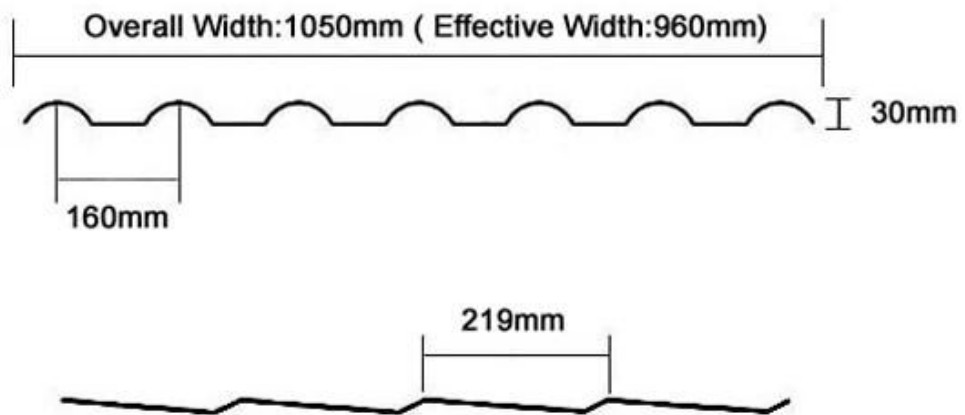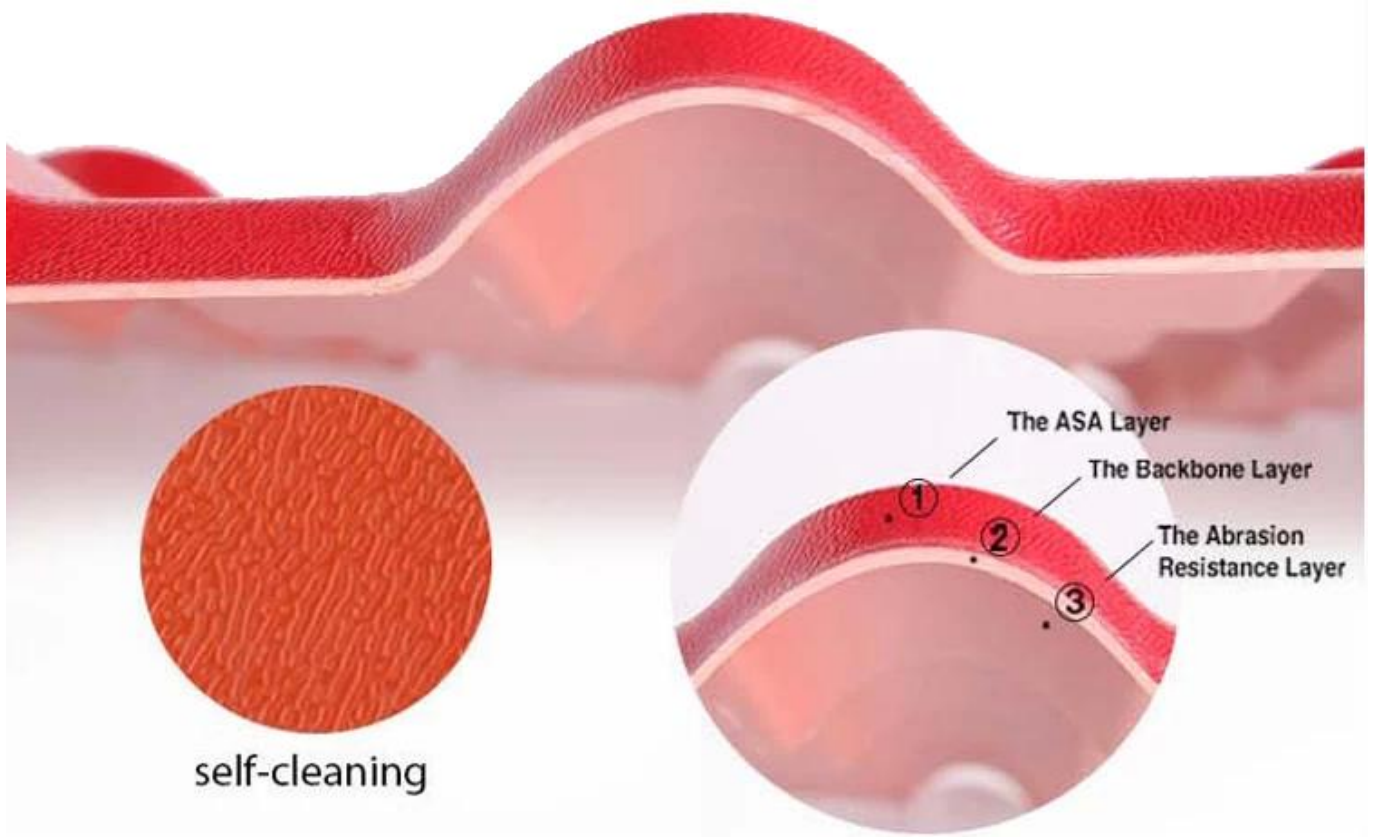

Purplish Red



Brick Red



Sky Blue

















Black



Dark Green



Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

# Accessories









# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Width deviation	mm	±0.5	0.2	Pass
3	Thickness deviation	mm	±0.05	0.03	Pass
4	Density	g/cm <sup>3</sup>	1.170	1.170	Pass
5	Tensile strength	MPa	≥1.0	1.1	Pass
6	Elongation at break	%	≥1.0	1.1	Pass
7	Holding full impact	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
8	Char temperature	°C	≥200	210	Pass
9	Flammability	---	Classified	Classified	Pass
10	Flame spread	---	Classified	Classified	Pass
11	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
12	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	0.1	0.1	Pass
3	Tensile strength	MPa	≥1.0	1.1	Pass
4	Elongation at break	%	≥1.0	1.1	Pass
5	Flexural strength	MPa	≥1.0	1.1	Pass
6	Flexural ductility	MPa	≥1.0	1.1	Pass
7	Density	g/cm <sup>3</sup>	1.170	1.170	Pass
8	Heat stability	°C	≥200	210	Pass
9	Char temperature	°C	≥200	210	Pass
10	Flammability	---	Classified	Classified	Pass
11	Flame spread	---	Classified	Classified	Pass
12	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
13	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
14	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
15	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass



# Our Factory







# Our Customer









\* 請提供詳細的技術規格書 **OEM** 或 **ODM** 服務，並說明相關的專利權、商標權、版權等法律問題。

\* 請提供詳細的生產計劃表？

\* 請提供詳細的品質管理系統 (QMS) 認證，如 ISO 9001 等。

\* 請提供詳細的研發團隊成員背景，包括學歷、工作經驗等？

\* 請提供詳細的財務狀況報告，包括資產負債表、損益表、現金流量表等，並說明公司的信用評級。

\* 請提供詳細的客戶名單及合作關係？

\* 請提供詳細的付款條件：**T / T** 或 **30%** 預付。

• 請提供詳細的交貨日期：**7** 天內交貨，或 **30%** 預付。

• **FOB Shipping Port:** 請提供詳細的港口名稱及地址。