

公司名稱	廣東省廣州市
商標	ZXC
公司地址	Foshan City, 廣東省廣州市, 中國 (廣東省廣州市)
材料名稱	Acrylonitrile Styrene Acrylate Copolymer, Polyvinyl Chloride
規格	25 磅
認證	ISO9001 / SGS / CE
包裝	1x20gp 或 6 磅 1x40gp 或 7 磅
厚度	219 微米。
重量	1050 克。
模量	960 磅。
顏色	2.3 磅 / 2.5 磅 / 2.8 磅 / 3.0 磅。
用途	各種工業用途
其他	各種工業用途
價格	根據市場行情 2 磅或 3 磅
備註	各種工業用途
其他	各種工業用途


Product show



More Types



resin roof tile accessories

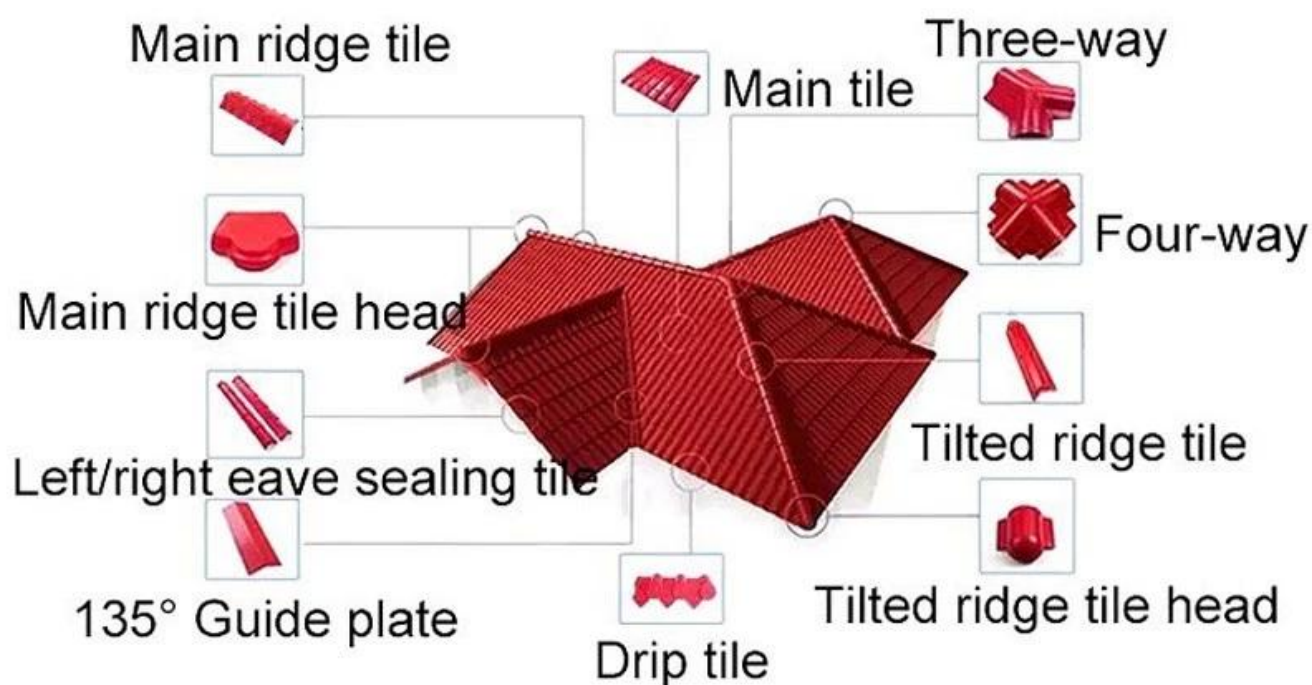

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate

检验报告
 Test Report

佛山市质量监督检测中心
 Foshan Supervision Testing Centre of Quality and Metrology

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Name	Unit	Requirement	Result	Remark
1	Appearance		The color of tile should be uniform. There should be no bubbles, cracks or visible impurities on the surface. Edge of the tile should be clean without dirt. Workpiece should be flat, and without any warpage.	Confirmed	Pass
2	Walk distance	mm	≤10	8	Pass
3	Thickness deviation	mm	±0.2	±0.12	Pass
4	Density	g/cm ³	≥2.25	2.28	Pass
5	Flexure strength	MPa	≥120	131	Pass
6	Flexural modulus	%	≥10	10	Pass
7	Water absorption (10h, 20°C)	%	No perforation marks or cracks after water test.	Confirmed	Pass
8	Acid resistance (10%, H2SO4, 24h)	%	No obvious color change or delamination phenomenon.	Confirmed	Pass
9	Alkali resistance (10%, NaOH, 24h)	%	No obvious color change or delamination phenomenon.	Confirmed	Pass
10	Impact resistance (pendulum)	mm	≤178	12	Pass
11	Change index	%	≤0.2	0.16	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Name	Unit	Requirement	Result	Remark
1	Appearance		The surface should be smooth with uniform coloration and no visible cracks, pits, scratch marks, surface pitting, color spots.	Confirmed	Pass
2	Surface face thickness	mm	15.17	15.18	Pass
3	Scratch strength	MPa	≥20	26	Pass
4	Scratch index	%	≤20	10	Pass
5	Flexural strength	MPa	≥140	143	Pass
6	Flexural elastic modulus	MPa	≥12000	12020	Pass
7	Density	g/cm ³	≥2.25	2.28	Pass
8	Water absorption (after water soaking)	%	≤0.25	0.1	Pass
9	Water absorption (after water soaking)	%	No perforation marks or cracks after water test.	Confirmed	Pass
10	Water absorption (after water soaking)	%	≤0.1	0	Pass
11	Water absorption (after water soaking)	%	No obvious color change or delamination phenomenon.	Confirmed	Pass
12	Water absorption (after water soaking)	%	No obvious color change or delamination phenomenon.	Confirmed	Pass
13	Water absorption (after water soaking)	%	No obvious color change or delamination phenomenon.	Confirmed	Pass
14	Water absorption (after water soaking)	%	≤0.25	0.105	Pass
15	Water absorption (after water soaking)	%	≤0.25	0.2	Pass

质量管理体系认证证书
 Quality Management System Certificate

佛山市南海众兴塑料制品有限公司
 Foshan Nanhai Zhongxingcheng Plastic Factory

GB/T19001-2008/ISO9001:2008

APPLICATION FOR CONSTRUCTION PRODUCTS DIRECTIVE

On Behalf of
FOSHAN ZHONG XING CHENG PLASTIC FACTORY
 Plastic Tile
 Model: ASA-1

Prepared For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
 No. 26, Industry Road, Dandan, Foshan, Guangdong, China

Prepared By: BEIDE (UK) PRODUCT SERVICE LIMITED
 U.K.: FLAT 107, 25 INDESCON SQUARE, LONDON, UNITED KINGDOM
 CHINA: 6F, Bldg E, Houm 3rd Ind Zone, Xixiang Bay* An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 10, 2016
 Date of Report: Mar. 11, 2016
 Report Number: B-616029178

CERTIFICATE

Prepared For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
 No. 26, Industry Road, Dandan, Foshan, Guangdong, China

Prepared By: BEIDE (UK) PRODUCT SERVICE LIMITED
 U.K.: FLAT 107, 25 INDESCON SQUARE, LONDON, UNITED KINGDOM
 CHINA: 6F, Bldg E, Houm 3rd Ind Zone, Xixiang Bay* An Dist, Shenzhen, China

www.celab.com

Packaging



