



zxc roofing tile industry

After sales less is really good

Ten years of slow fading, **30** years of warranty



GOOD CHOICE

Our advantage



Intimate service, strong product supply capacity



product available



A variety of styles and specifications sufficient stock



Support customization



Specifications and sizes can be consulted with customer service in detail, and quotations can be customized



Worry-free after sales



Manufacturers wholesale quality assurance, affordable prices, worry-free after-sales

SOURCE MANUFACTURER

>



THE TROUBLES OF TRADITIONAL ROOF TILES

#

other products

×



severely faded

Wind and sun soften and fade



There is a gap

Uneven with gaps, leaking rain



uneven color

Weathered uneven color
phenomenon




Fragile

Fragile and complicated
to install

our products ✓

Ten years of slow fading, 30 years of warranty

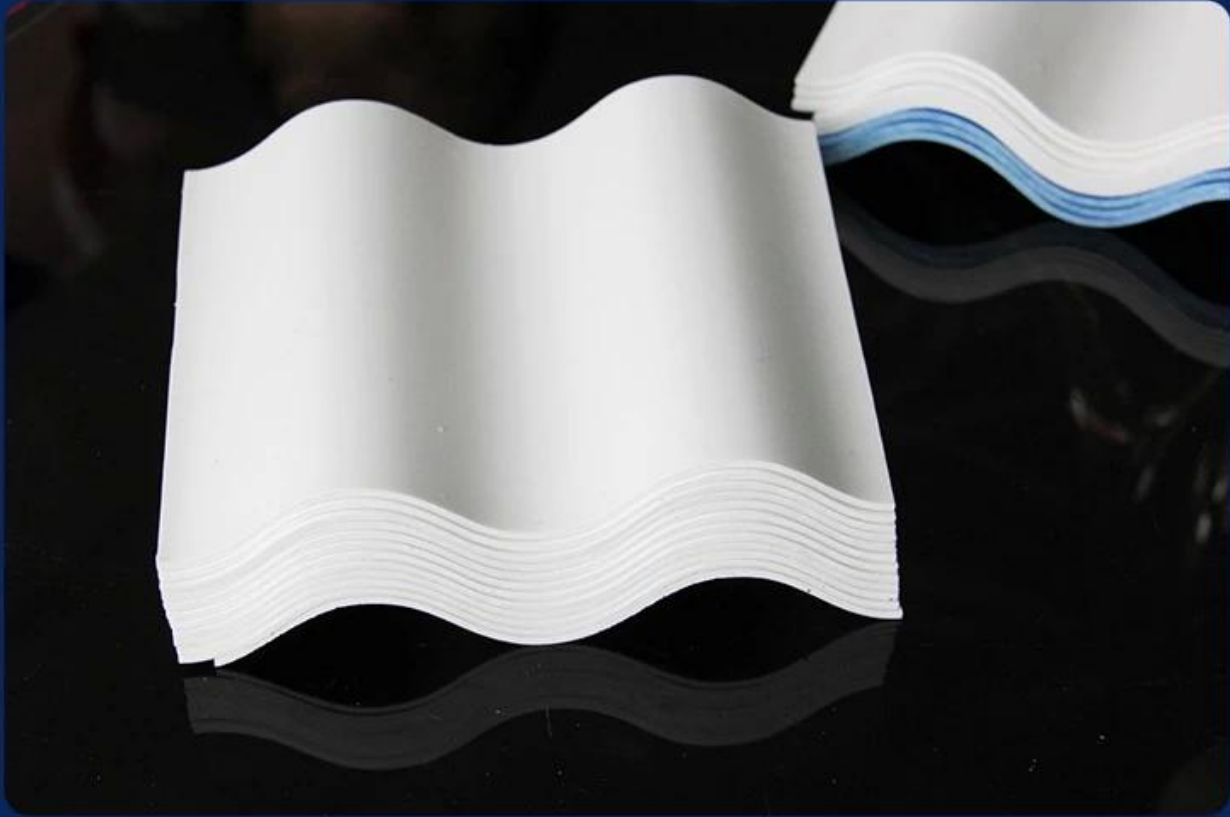

Uniform color, durable and not easy to fade
Good quality, durable and bright.



high toughness



Strong pressure resistance

Effective insulation



good sound insulatio



thermal and acoustic insulation high-quality
Good sound insulation effect in case of external noise



preservative
Anti-acid and alkali



flame retardant performance
b1 class fire performance

PRODUCT PARAMETERS

#

>



thickness: 1.0mm-3.0mm
width: 1130/980/900/840/1080mm
length: customizable
waveform: big hang, small wave
type: asa plastic roofing tile
Be applicable: Factory buildings, ware houses, markets, residences, market roads, canopies, chemically corrosive factories

A variety of colors, optional to build different architectural styles

More colors can be customized



<Mlight yellow>



<dark blue>



<grass green>



<Beige>

Accessories and Installation Diagram



*pvc plastic waterproof cap, used with self-tapping screws to fix the tile on the skeleton



CUSTOMER CASE SHOW





Factory renovation



Our Factory

Zhongxingcheng New Material Co., Ltd. 中国新兴成新材料股份有限公司 中国新兴成新材料股份有限公司 中国新兴成新材料股份有限公司 ASA,

FRP, PVC, PC, APVC, PVC, PVC, FRP, PVC, PC



Quality inspection instruments strictly control the quality

Each batch of products has undergone rigorous testing.



Gravity testing



Hardness testing



Tensile force testing



Impact resistance testing

Factory display




In-stock inventory



Own production line



Own production line

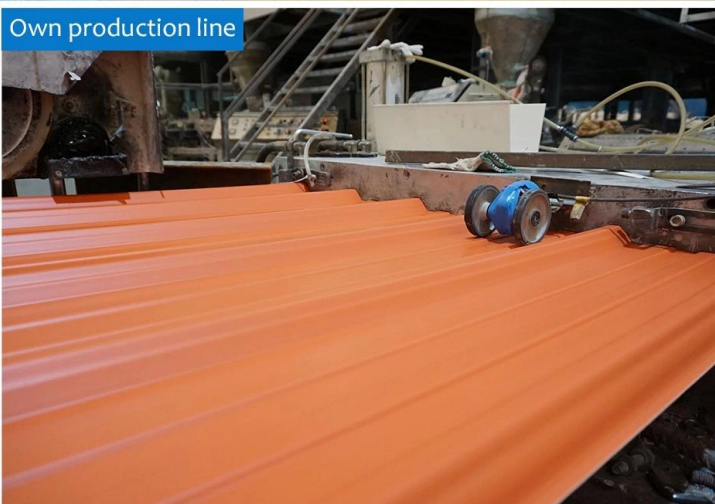

Exhibition



Certificate

Official quality inspection, quality assurance

Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



佛山市质
Foshan Supervision

佛山市质量计量监督检测中心
检验报告

No. G14-WT1489

序号	检测项目	单位	标准要求	检测结果	判定
1	外观	—	表面光滑平整, 厚度均匀, 色泽一致, 无裂纹、缺口、鼓孔、烧焦、气泡、明显麻点、杂质点。	符合	合格
2	密度	g/cm ³	1.45~1.65	1.64	合格
3	弯曲性能	mm	支撑跨度800mm, 载荷40kg, 允许挠度≤50	15	合格
4	冲击性能	—	1kg重钢球, 1.5m自由落体, 冲击试样无碎裂, 试样经冲击试验后不得产生贯穿的孔穴或裂纹。	符合	合格
5	抗拉强度	N	≥60	63	合格

全部合格

审核: 王博斌 主检: 梁德聪

佛山市质
Foshan Supervision

Packaging



FAQ

* 1. How many sheets are in a stack?

* 2. What is the weight of a stack of sheets?
The weight of a stack of sheets depends on the size and thickness of the sheets. A stack of 10 sheets of 1200mm x 2400mm x 1.2mm sheets weighs approximately 120kg.

* 3. How many stacks are in a pallet?

* 4. What is the size of a pallet?

