

# Product show



1. 紅瓦



2. 紅瓦 - 紅瓦



3. 紅瓦

4. 紅瓦



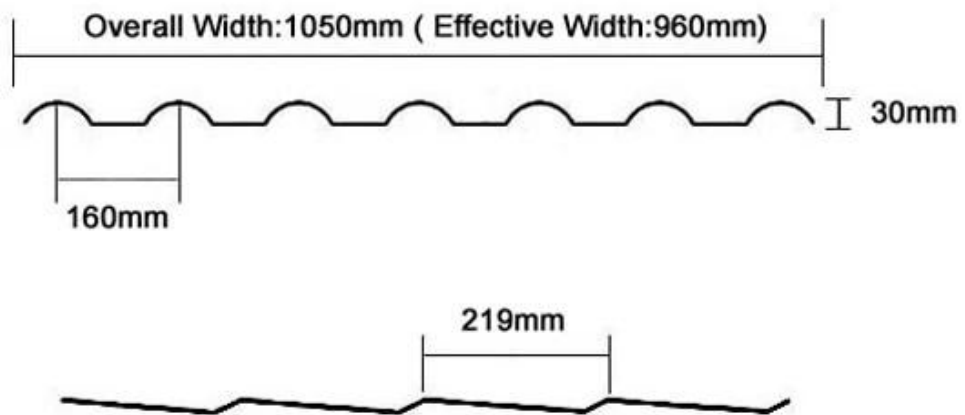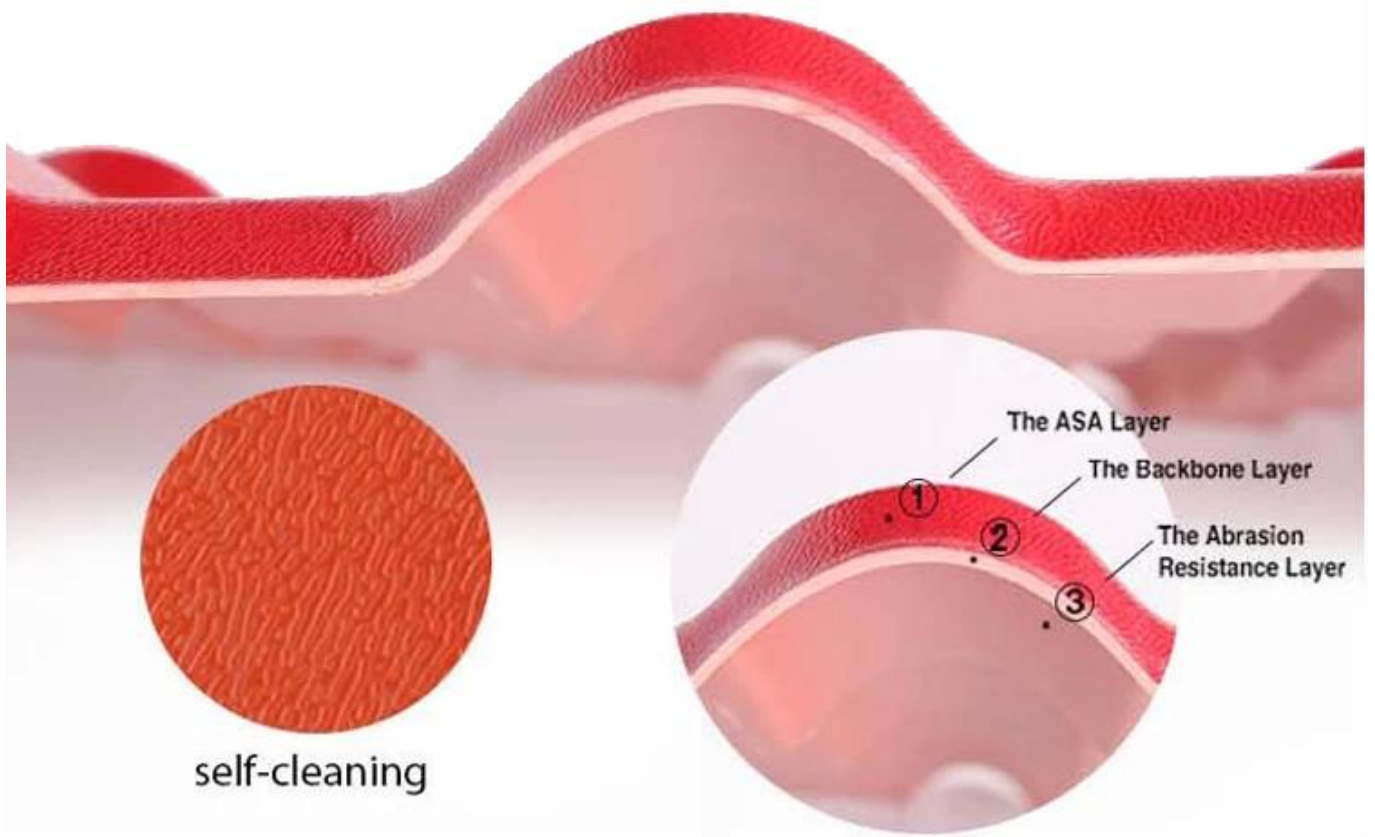

Purplish Red



Brick Red



Sky Blue















Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

# Accessories





# Certificate



Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The color of the sheet is uniform. There should be no bubbles, cracks or visible impurities on the surface. There should be no visible defects on the surface.	Confirmed	Pass
2	Width deviation	mm	±0.5	0.2	Pass
3	Thickness deviation	mm	±0.1	0.05	Pass
4	Density	g/cm <sup>3</sup>	1.170	1.170	Pass
5	Tensile strength	MPa	≥1.0	1.1	Pass
6	Elongation at break	%	≥1.0	1.1	Pass
7	Holding full impact	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
8	Char temperature	°C	≥200	210	Pass
9	Flammability	---	Classified	Classified	Pass
10	Flame spread	---	Classified	Classified	Pass
11	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
12	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass

Foshan Supervision Testing Centre of Quality and Metrology  
Test Report

No.	Item	Unit	Requirement	Result	Verdict
1	Appearance	---	The surface should be smooth and uniform. There should be no bubbles, cracks or visible impurities on the surface.	Confirmed	Pass
2	Surface roughness	mm	≤0.1	0.08	Pass
3	Tensile strength	MPa	≥1.0	1.1	Pass
4	Elongation at break	%	≥1.0	1.1	Pass
5	Flexural strength	MPa	≥1.0	1.1	Pass
6	Flexural ductility	MPa	≥1.0	1.1	Pass
7	Density	g/cm <sup>3</sup>	1.170	1.170	Pass
8	Heat stability	°C	≥200	210	Pass
9	Char temperature	°C	≥200	210	Pass
10	Flammability	---	Classified	Classified	Pass
11	Flame spread	---	Classified	Classified	Pass
12	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
13	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
14	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass
15	Impact strength	kJ/m <sup>2</sup>	≥0.5	0.6	Pass



# Our Factory







# Our Customer



# Packaging



# FAQ

\*

\*

\*

\*

\*

\* 請提供詳細的技術規格書 **OEM** 或 **ODM** 服務，並說明相關的生產和交付時間。

\* 請提供相關的技術支持或培訓服務？

\* 請提供相關的產品樣品或測試報告，以便我們進行評估。

\* 請提供相關的產品認證或品質保證書？

\* 請提供相關的產品包裝和運輸方案，並說明相關的費用和保險情況。

\* 請提供相關的產品價格和折扣政策？

\* 請提供相關的產品價格表：**T / T** 付款條件 **30%** 預付款。

• 請提供相關的產品價格表：**7** 天內付款 **30%** 折扣。

• **FOB Shipping Port:** 請提供相關的港口和運輸費用。