

Product show

```

##### ZXC FRP #####:

```

frp

[illegible]

□□□□□□□□ 60-85% □□□□□□□□ FRP □□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□ □ □ □ □ □ □ □ :

1-3-2.0 1 / 4-1 / 5

FRP 80
130

FRP

_____, _____:

10

ZXC ██████████ FRP ██████████

[frp](#)



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE



***10-year
warranty***



Complete specifications



Support customization



Adequate inventory



product available




項目	規格・仕様
品名	frp-01
材質	FRP
寸法	6000 mm, 11800 mm. 標準仕様
重量	標準仕様
標準仕様	930mm
標準仕様	840mm
標準仕様	660mm
標準仕様	1.0±0.1mm
	1.2 ± 0.1 mm
	1.5 ± 0.1 mm
	2.0±0.1mm
標準仕様	1.7±0.1mm/0.1mm
	2.1±0.1mm/0.1mm
	2.6±0.1mm/0.1mm
	3.0±0.1mm/0.1mm
標準仕様	
標準仕様/20 FCL (21 単位)	標準仕様/40 FCL (26 単位)
12,000 mm	15,000 mm
10,000 mm	12300 mm
8000m2	10,000 mm
7000m2	8600m2

標準仕様/20 FCL (21 単位) ZXC 標準仕様/40 FCL (26 単位) [ZXC](#)

CUSTOMER CASE SHOW

Has more than ten years of production experience

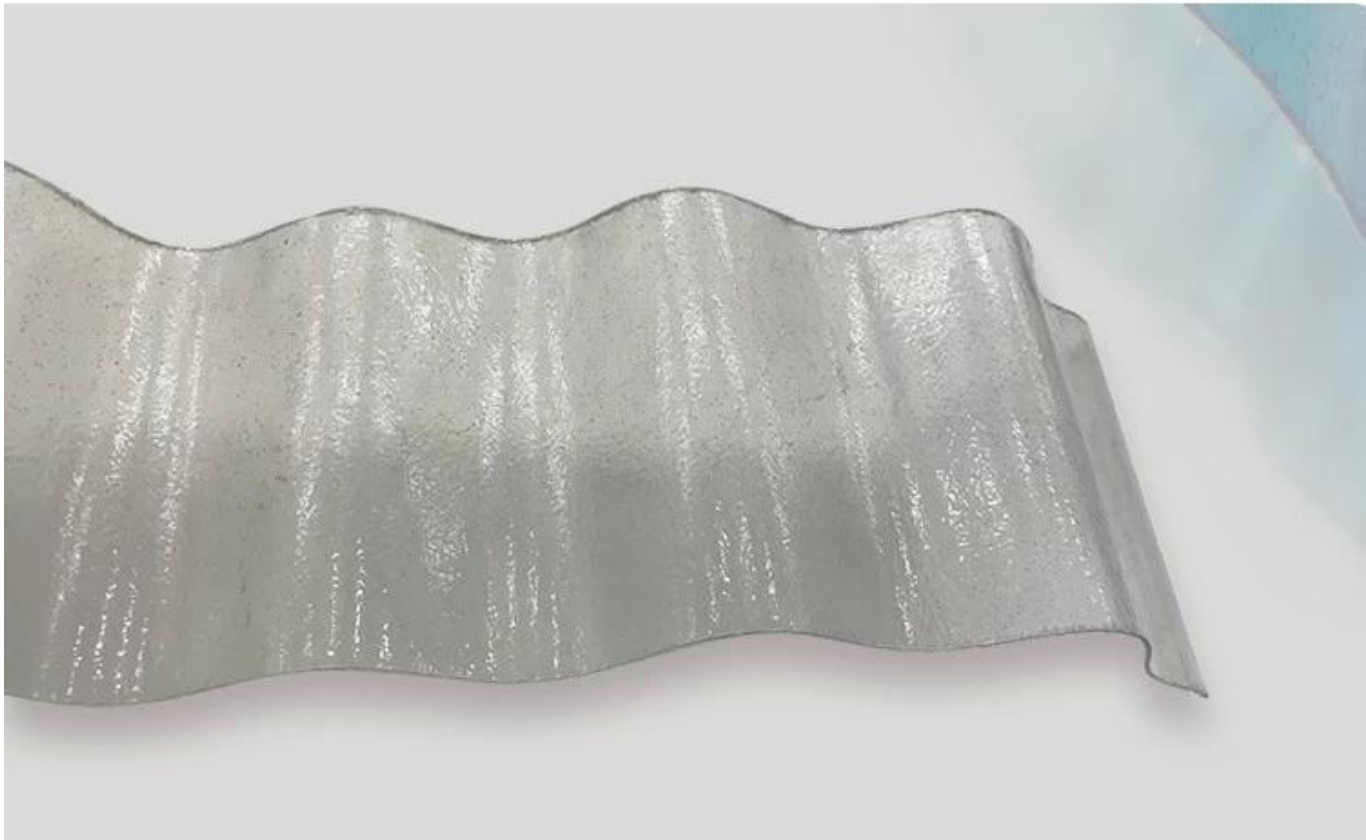

厚度:	1.0mm-2.8mm
宽度:	1130/930/900/840mm
长度:	可定制
表面处理:	阳极氧化/电泳涂装
包装方式:	标准
交货周期:	根据订单数量，通常为1-2周

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue




grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

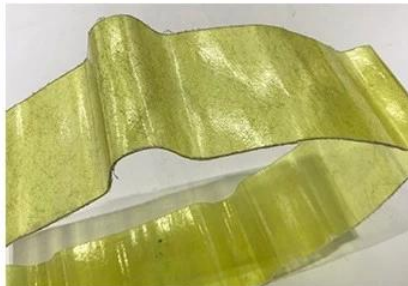

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS “ TO CHOOSE US

Iron tiles can be directly covered




*sound
insulation*

*Anti
-corrosion*

insulation

*High
temperature
resistance*

*anti
-stress*

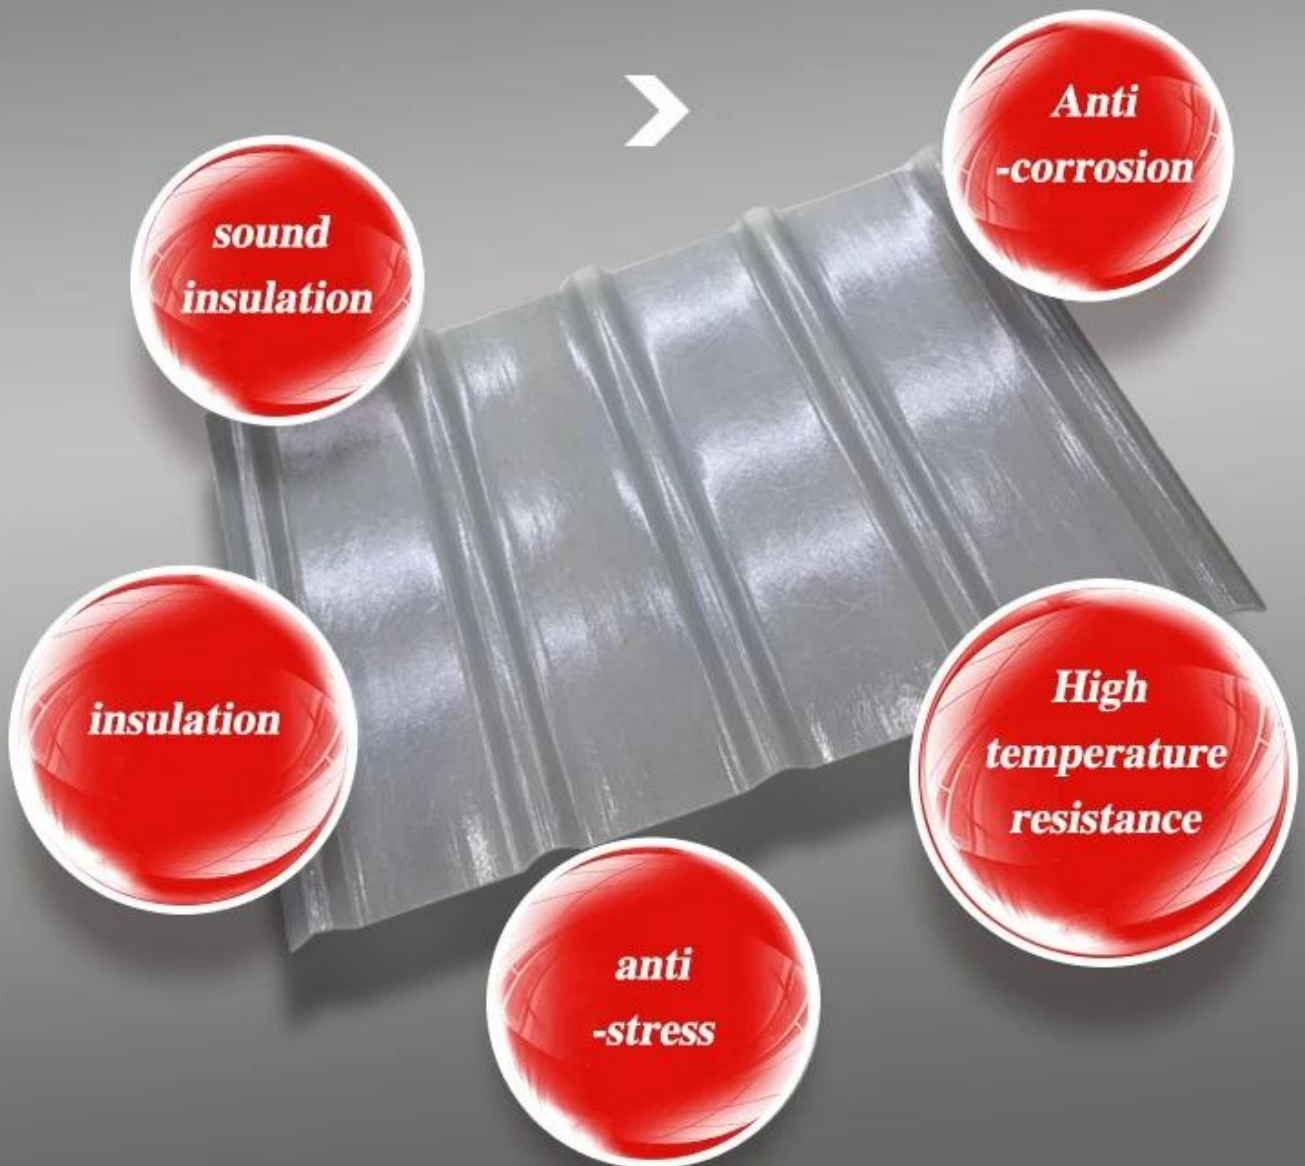

“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40° - 120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening




The light is astigmatism, the light is soft, and the light transmittance is high.

Zhongxingcheng New Material Co., Ltd. 主要从事塑料改性、塑料挤出、塑料吹膜、塑料注塑等产品的研发、生产和销售。主要产品有：ASA, APVC, PVC, PC, FRP 等。



FACTORY REAL SHOT DISPLAY

Professional production to do every step

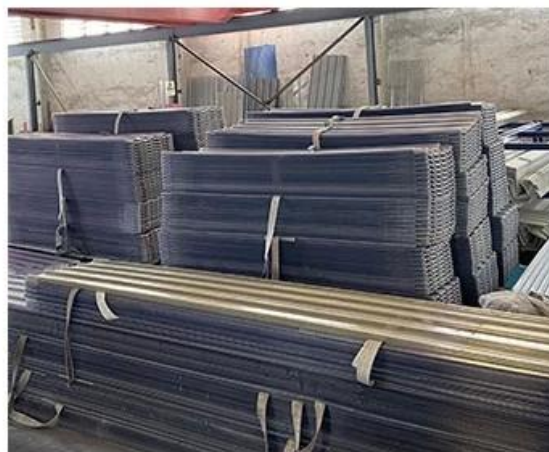

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



— 01 —

ONLINE CONSULTATION

Provide professional product
consultation



— 02 —

PROVIDE PRICING

Provide reasonable price for
product performance



— 03 —

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





—04—

ORDER PRODUCTION

Professional and rapid production
of multiple production lines

—05—

AFTER DELIVERY

Intimate and assured after-sales
service



Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

*[Corrugated sheets are made of what material?](#)

* [What are the advantages of using corrugated sheets?](#)

[Corrugated sheets are made of what material?](#) [What are the advantages of using corrugated sheets?](#)

[Corrugated sheets are made of what material?](#) [What are the advantages of using corrugated sheets?](#)

*請問貴公司是否提供代客設計服務？

* 請問貴公司是否提供代客組裝服務？

*請問貴公司是否提供代客包裝服務？

* 請問貴公司是否提供代客貼標服務？

*請問貴公司是否提供代客出貨服務？

*請問貴公司是否提供代客驗貨服務？

* 請問貴公司是否提供代客驗貨服務？

* 請問貴公司是否提供代客驗貨服務？

* 請問貴公司是否提供代客驗貨服務？

* 請問貴公司是否提供代客驗貨服務？

• 請問貴公司是否提供代客驗貨服務？

• FOB Shipping Port: Foshan, 貴州省, 貴州省