

Claret



Orange



Blue



Dark Gray




Dark Green



Brick



Blue Gray

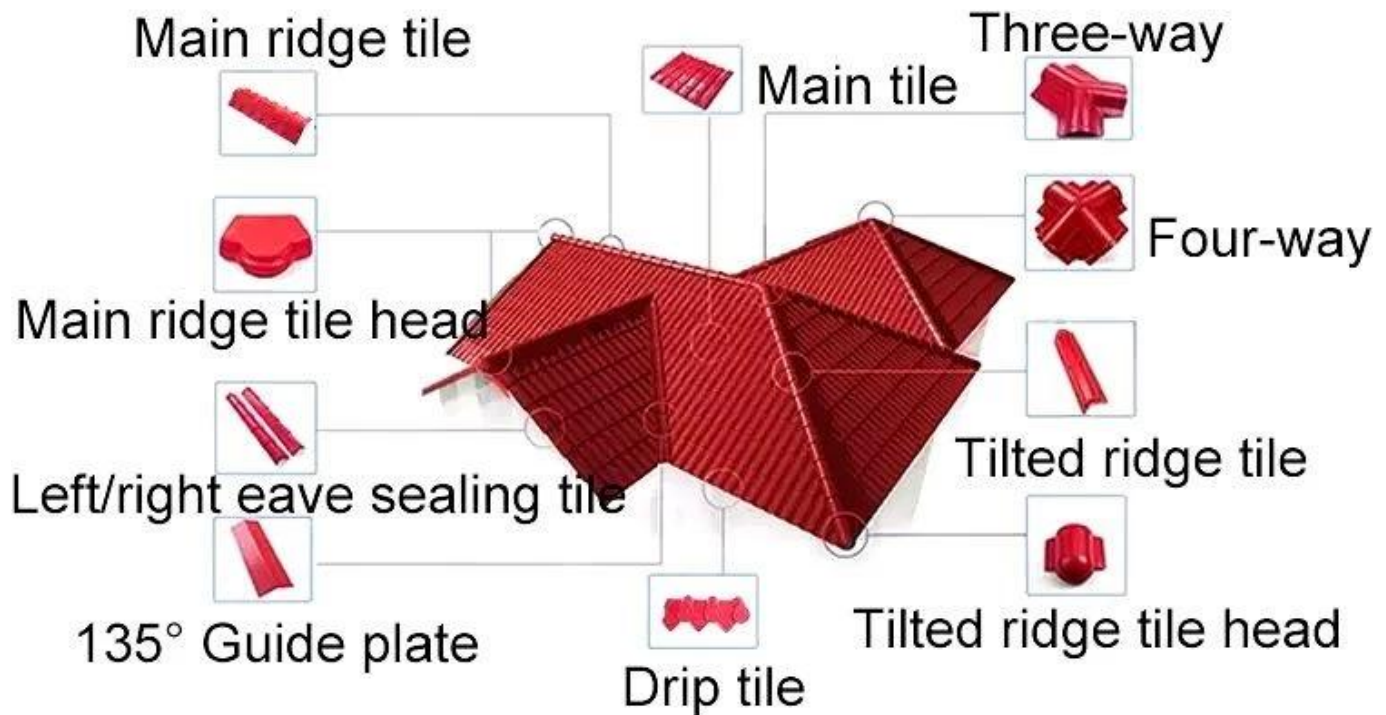

1. Lasting Color

ZXC ASA roof tile is coated with ASA on surface and PVC on bottom, it is stable when exposed to chemical agents such as industrial emissions, fog, salt, acids, alkali etc.



5. Excellent heat preservation and insulation performance

ZXC ASA roof tile is coated with ASA on surface and PVC on bottom, it is stable when exposed to chemical agents such as industrial emissions, fog, salt, acids, alkali etc.



2. Excellent Anti-load Performance

After testing, with a support distance of 660mm, loading 150kg, the roof tile will not crack and damage.



6. Fire Proof Grade B

Difficult to burn, the fire proof level can reach Grade B and meets the common safety requirements in most areas.



3. Good Sound Insulation

Has good noise absorption performance when it is affected by external noise such as heavy rain and wind.



7. Excellent Insulating Property

ASA synthetic resin roof tile is an insulation product, and it will be intact in case of accidental discharge.



4. Excellent anti-corrosion performance

After soaking for 24 hours in salt, alkali and 60% of various acids. It is very suitable for using in acid rain areas coastal areas, and the effect is particularly remarkable.



7. Quick Installation

ASA synthetic resin roof tile has an effective width 960mm and high paving efficiency, light weight, easy loading and unloading, and with complete installation accessories.

Foshan Zhongxing 佛山中星 ASA

APVC

UPVC, FRP, 100

Foshan, China.8

100

15,000
 Foshan
 ISO9001: 2008
 CE