


Product show


ASA 合成树脂瓦具有重量轻、强度高、耐冲击、耐腐蚀、抗老化、使用寿命长等特点。ASA 合成树脂瓦的厚度为 30mm，重量为 2.5kg/m²，抗压强度为 1500N/m²，抗冲击强度为 10J/m²，耐腐蚀性能符合 GB 18980-2003 标准。ASA 合成树脂瓦的耐候性能符合 GB 18980-2003 标准，使用寿命可达 20 年以上。ASA 合成树脂瓦的安装简便，无需使用水泥、砂浆等材料，施工速度快，维护方便。ASA 合成树脂瓦适用于各种建筑，如别墅、酒店、学校、医院、工厂、仓库等。ASA 合成树脂瓦的颜色丰富，可根据客户需求进行定制。ASA 合成树脂瓦的价格合理，性价比高。ASA 合成树脂瓦是建筑行业的理想选择。

ASA SYNTHETIC RESIN ROOFING TILES

Scenic areas and the pastoral farmhouse
use the most roofing tiles.

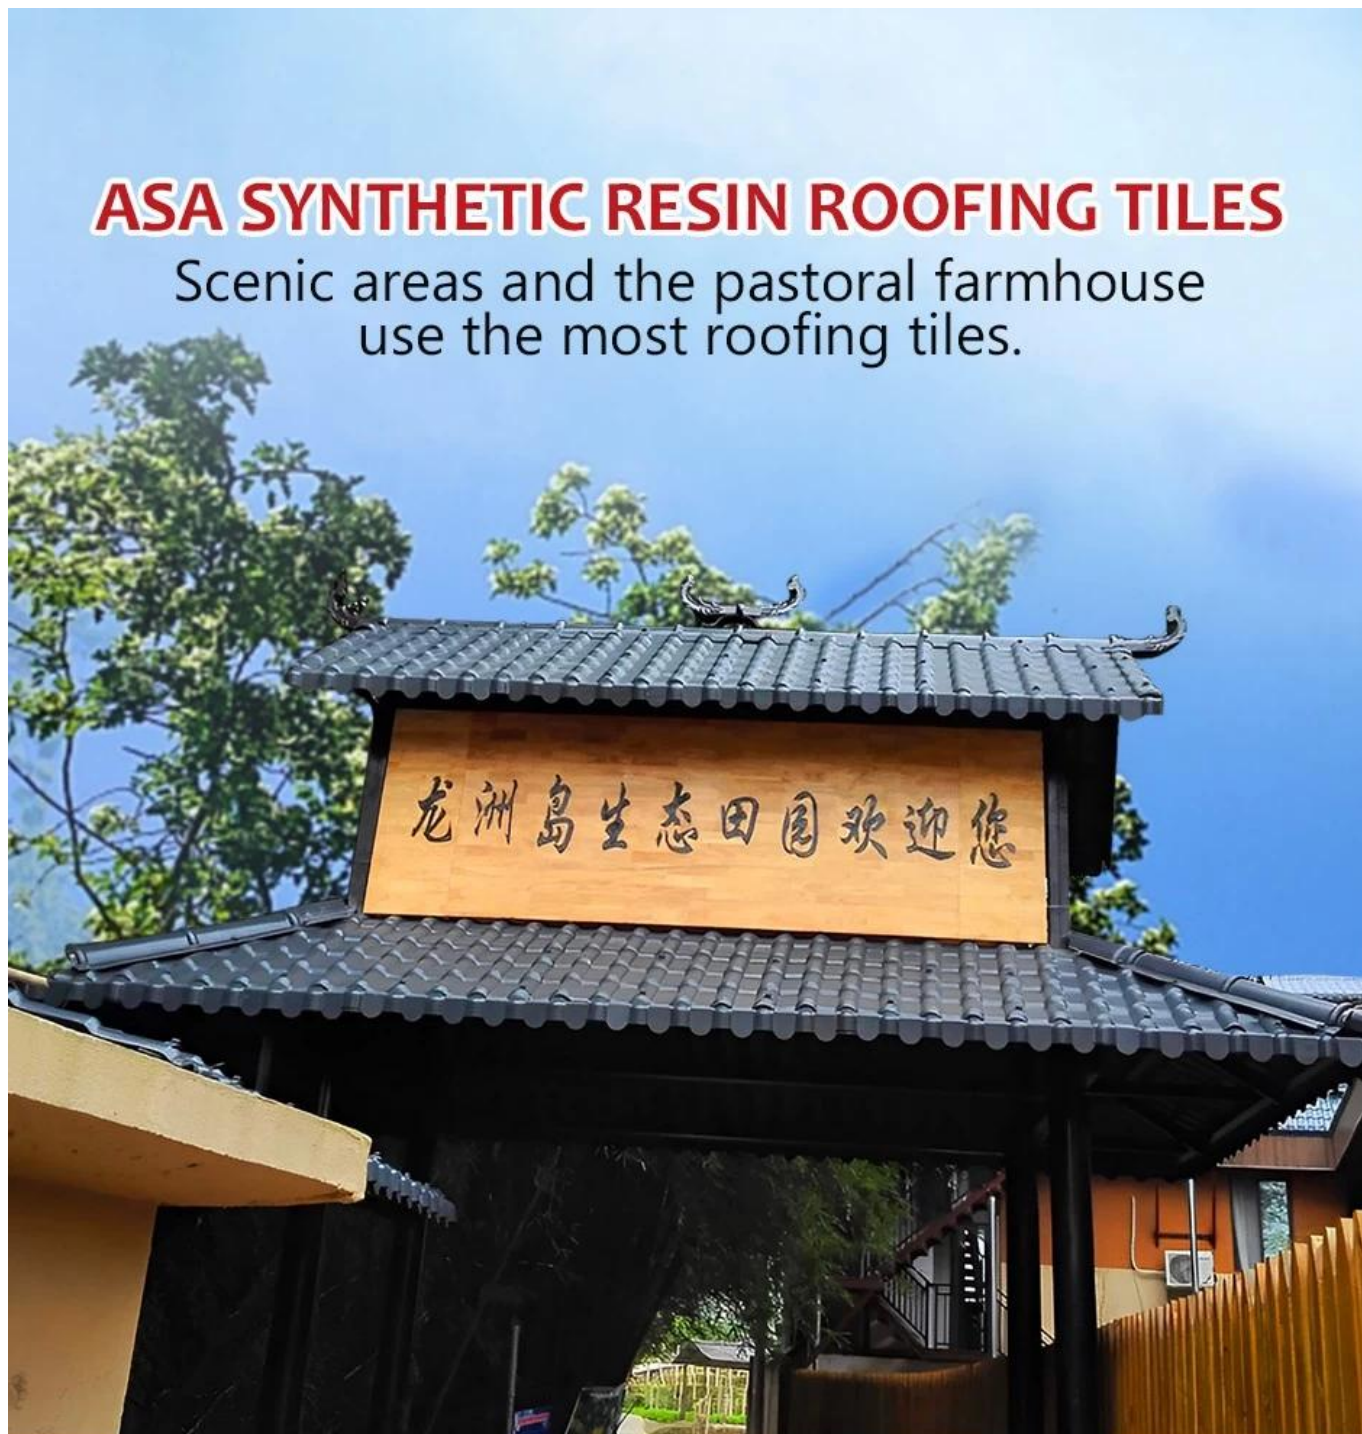



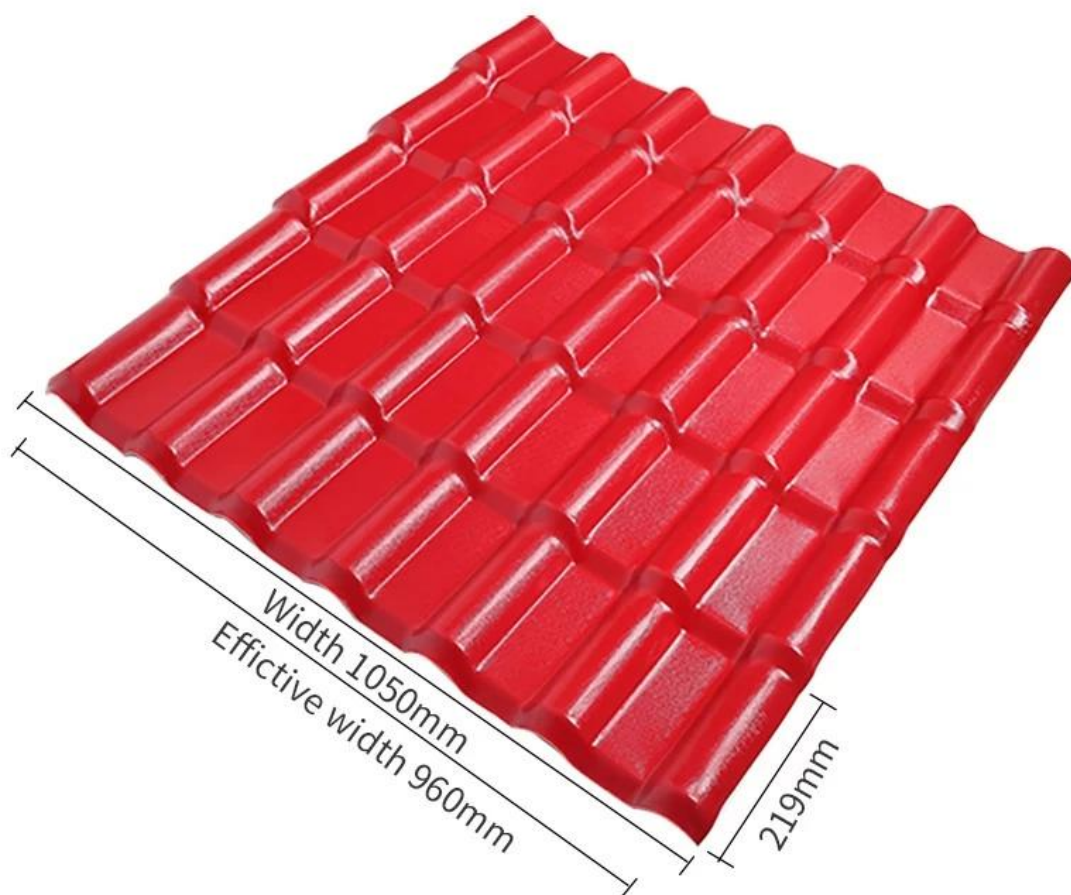

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

Dimensional measurement method


both sides

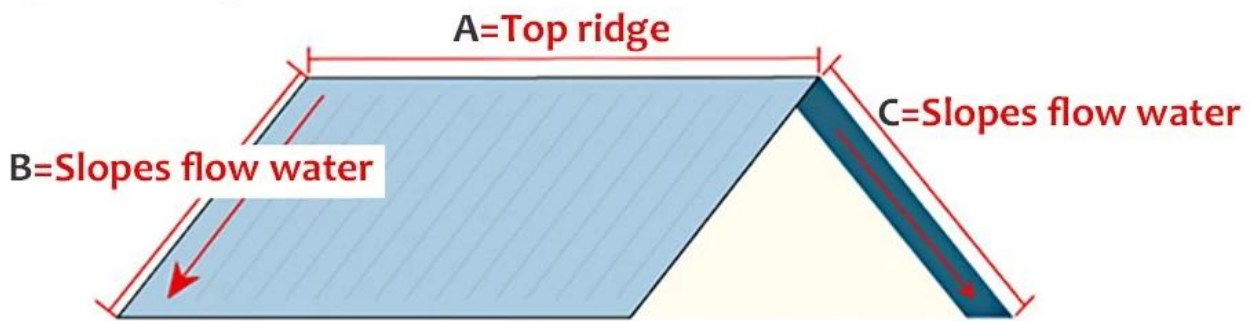

1. Measure the dimension of the **A** top ridge.
2. Measure the dimensions of **B**
3. Measure the dimensions of **C**

Measure all the dimensions (don't forget the eaves)


four sides

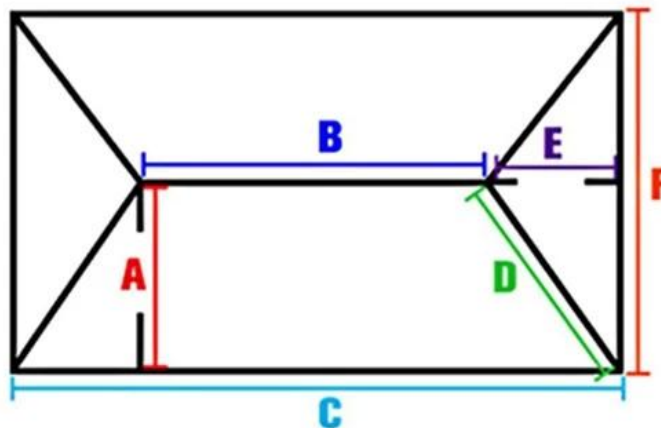

1. Measure the dimension of the **B** top ridge.
2. Measure the dimensions of ramp **A**
3. Measure the width of **C**
4. Measure the dimensions of the **D** diagonal ridge.
5. Measure the dimensions of ramp **E**
6. Measure the width of **F**

Measure all the dimensions (don't forget the eaves)

Roofing accessories

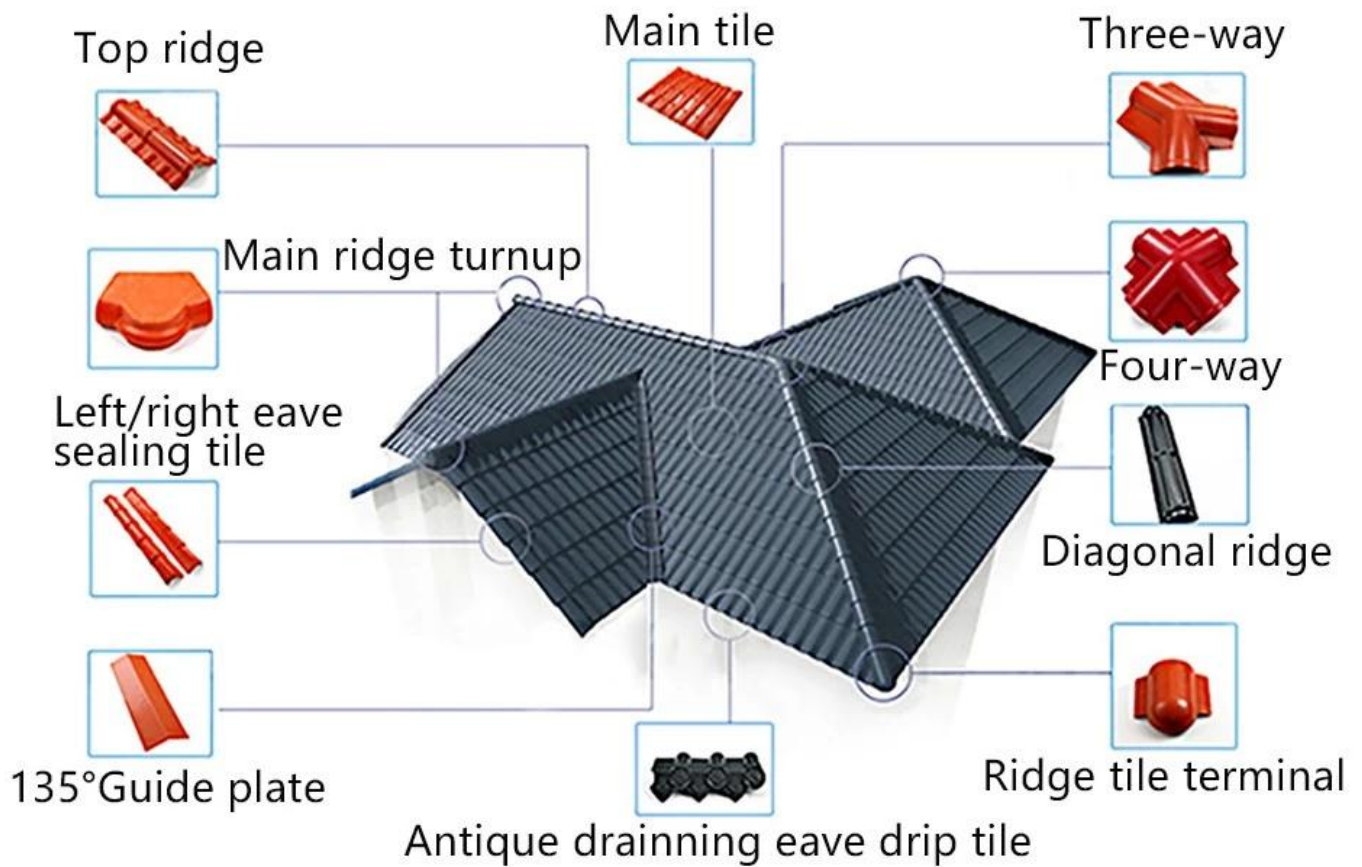

Installation considerations

- 1.The purlins can use square pipe (60x40x3mm)
- 2.The purlins can use C-shaped steel (100x50x20x3mm)
- 3.The purlins can use anti-corrosion wood square (60x40mm)
- 4.purlin spacing of 660mm

Our Factory

Zhongxingcheng New Material Co., Ltd. 佛山市南海区 Foshan City, Nanhai District China

ASA,

APVC, PVC, PVC,

FRP, PVC, PC



Factory display



9 production lines



Raw material warehouse



Product comparison

Learn all about our products

Dacheng resin roofing tile



Brand new raw materials imported
bright color, long service life
30~50 years

Recyclable resin roofing tiles



Recycled materials, dull color, easy
to have black spots in appearance
very short life.



Brand new material, good
plasticization, long service life



Recyclable material, reduced
toughness, many impurities,
easy to break



ASA surface thickness 0.1~0.15mm
does not foam and does not fall off



The thickness of the surface layer of
the film is 0.05~0.1mm, which is
easy to blister and fall off

Exhibition



Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



Packaging



FAQ

- [illegible]

* 請提供貴公司之詳細資料，包括公司名稱、地址、電話、傳真、電子郵件、網址等？

* 請提供 貴公司之產品目錄或 OEM 及 ODM 之產品目錄，以便我們參考？

* 請提供貴公司之產品目錄？

* 請提供貴公司之產品目錄，以便我們參考？

* 請提供貴公司之產品目錄，以便我們參考？

* 請提供貴公司之產品目錄，以便我們參考？

請提供貴公司之產品目錄，以便我們參考？

* 請提供貴公司之產品目錄，以便我們參考？

* 請提供貴公司之產品目錄，以便我們參考？

• 請提供貴公司之產品目錄，以便我們參考？

• FOB Shipping Port: 請提供 貴公司之產品目錄