

Product show



1- 紅外線發熱管發熱，使塑料顆粒均勻加熱，防止局部過熱。



2. 塑料顆粒均勻加熱，防止局部過熱，使塑料顆粒均勻加熱，防止局部過熱。



3. 塑料顆粒均勻加熱，防止局部過熱，使塑料顆粒均勻加熱，防止局部過熱。






4. 塑料顆粒均勻加熱，防止局部過熱，使塑料顆粒均勻加熱，防止局部過熱。

產品名稱	ASA 塑料顆粒
規格	塑料顆粒
包裝規格	塑料顆粒 包裝規格 (塑料顆粒)
用途	塑料顆粒 包裝規格 塑料顆粒 包裝規格 - 塑料顆粒 - 塑料顆粒 - 塑料顆粒
數量	25 個
標準	ISO9001 / 塑料顆粒 / CE
塑料顆粒 包裝規格 塑料顆粒 包裝規格	100 塑料顆粒
塑料顆粒 包裝規格	1x20GP 塑料顆粒 6 個 - 1x40GP 塑料顆粒 7 個
塑料顆粒 包裝規格	塑料顆粒 8 塑料顆粒 13,500 塑料顆粒
塑料顆粒 包裝規格	T/T 塑料顆粒 30% 塑料顆粒 塑料顆粒 /C,
塑料顆粒 包裝規格	塑料顆粒 Full Container Load (FCL) 塑料顆粒 (LCL) 塑料顆粒
塑料顆粒 包裝規格	塑料顆粒 PE
塑料顆粒 包裝規格	塑料顆粒 / 塑料顆粒 / 塑料顆粒
塑料顆粒 包裝規格	塑料顆粒 包裝規格, 塑料顆粒, 塑料顆粒, 塑料顆粒, 塑料顆粒 Flat to Slope 塑料顆粒

塑料顆粒 包裝規格	#1050-160-30
塑料顆粒 包裝規格	塑料顆粒 包裝規格



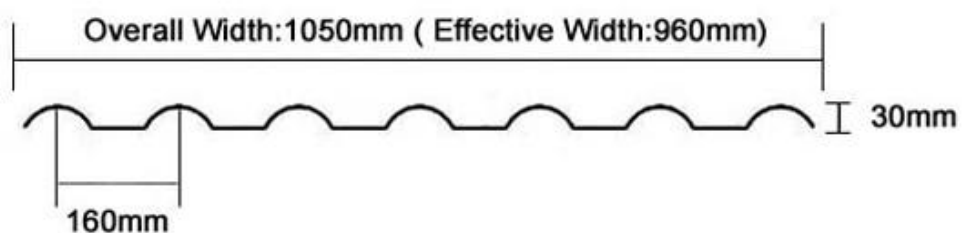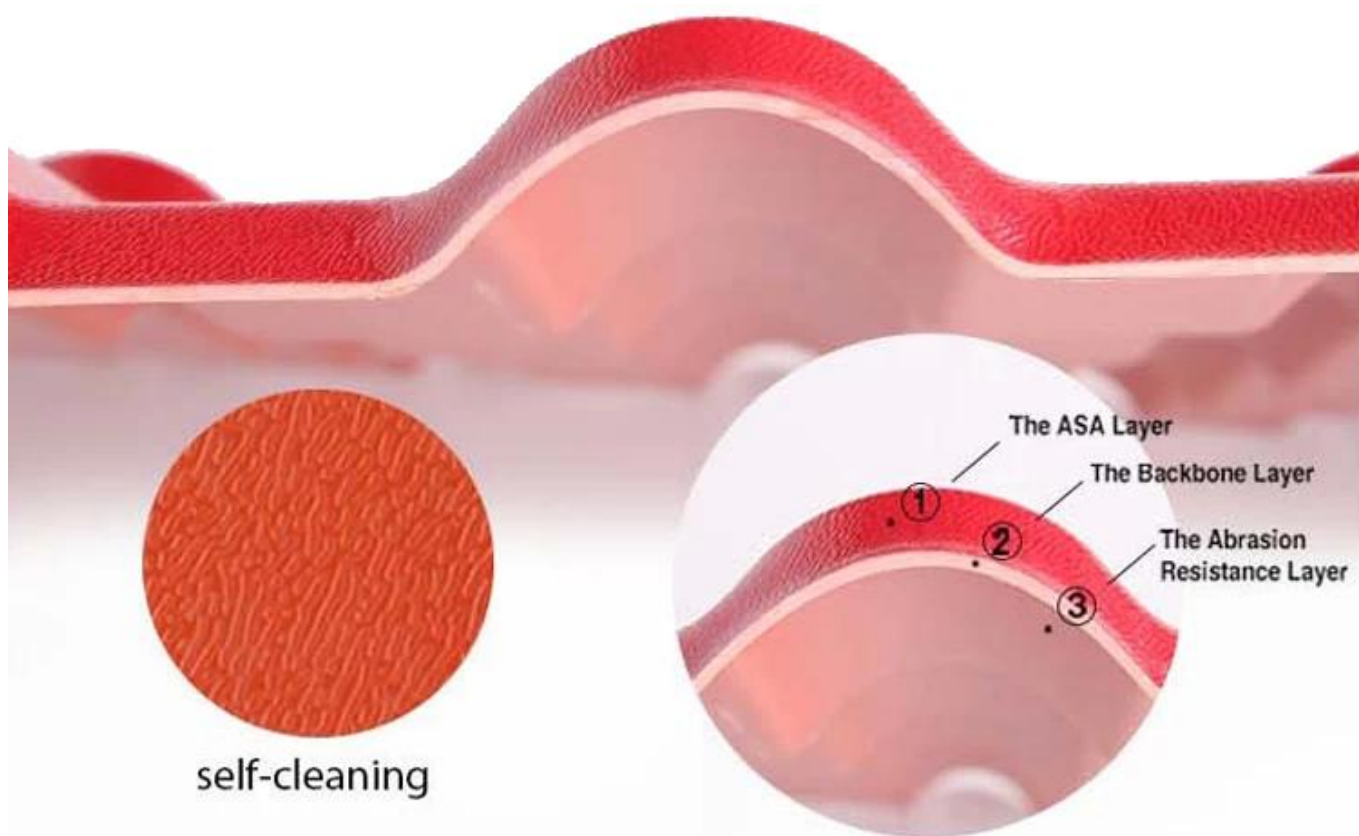

Purplish Red



Brick Red



Sky Blue



Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				

Accessories





Certificate



Our Factory





Our Customer



Packaging



FAQ

- [illegible]

- [illegible]