



ASA	ASA
ASA	ASA
ASA	ASA (ASA)
ASA	Acrylonitrile Styrene ASA, ASA, ASA
ASA	25
ASA	ISO9001 / SGS / CE / ASA
ASA	100 ASA
ASA	1x20GP ASA 6, 1x40GP ASA 7
ASA	ASA 8 ASA 13,500 ASA
ASA	T/T ASA 30% ASA
ASA	ASA Full Container Load (FCL) ASA (LCL) ASA
ASA	ASA PE
ASA	ASA / ASA / ASA
ASA	ASA, ASA, ASA, ASA, ASA, ASA, ASA Flat to Slope ASA





Purplish Red

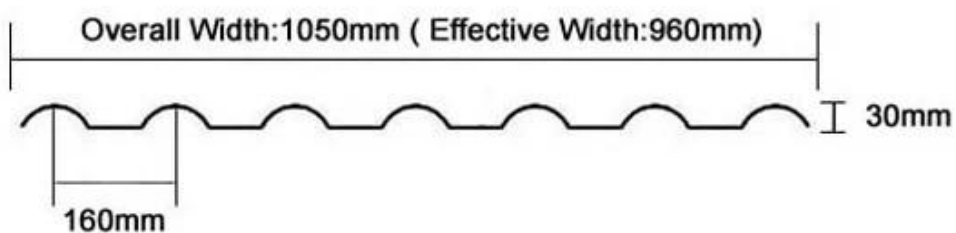

Brick Red



Sky Blue




Black



Dark Green

□□□□□□□□□□	#1050-160-30
□□□□□	□□□□□□□□□□
□□□□□□□□□□□□□□	1,050□□
□□□□□□□□□□□□□□□□□□□□□□□□	960□□
□□□□□□□□	2.3 □□. / 2.5 □□. / 2.8 □□. / 3.0 □□
□□□□□□□□	□□□□□□□□□□□□□□□□
□□	□□□ / □□□ / □□□ / □□□ / □□□□□□□□□□
□□□□□□□□□□□□□□□□□□	160□□
□□□□□□□□□□□□□□□□□□	30□□
□□□□□□□□□□□□□□	219□□



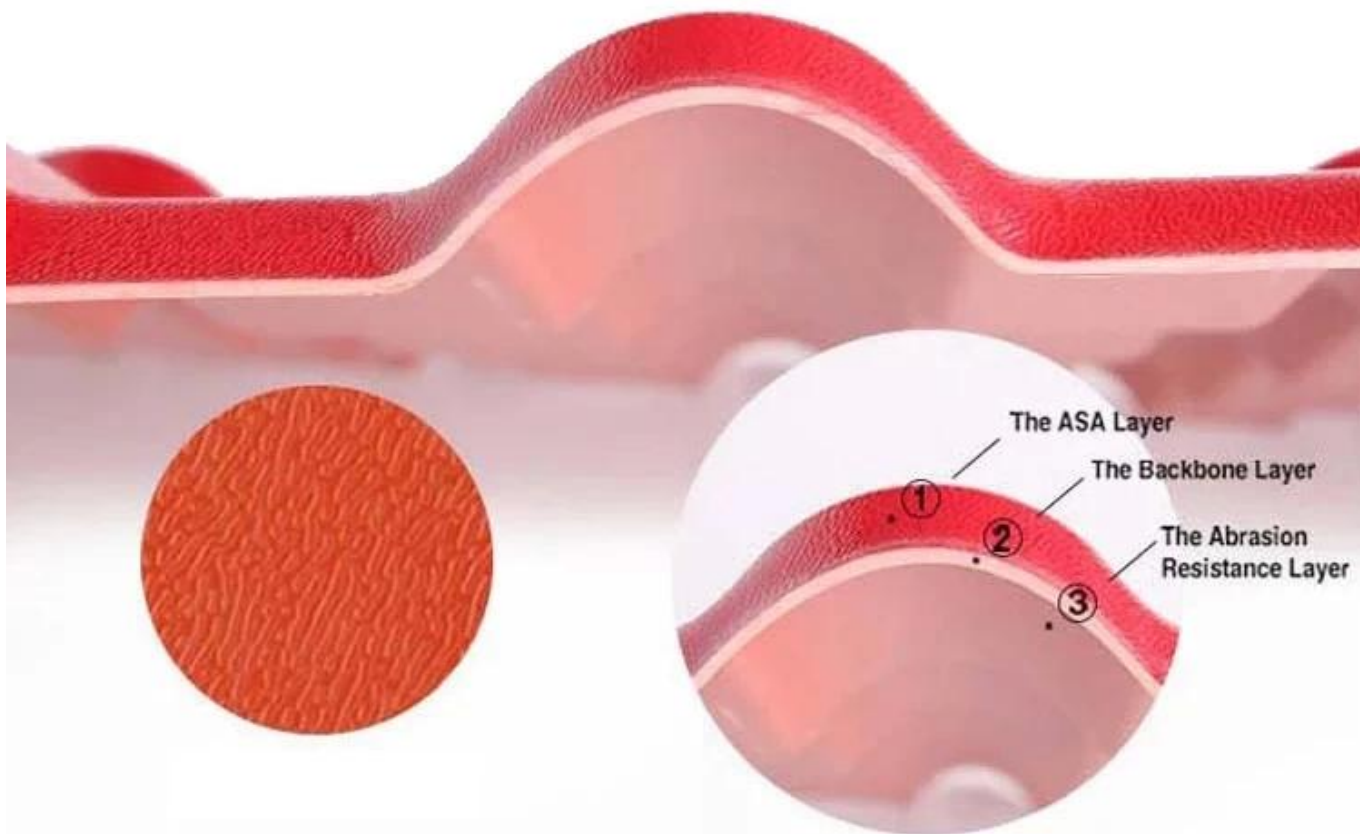

ASA 500 GE

:ASA 500 GE 10 0.15 . 0.15-0.18 .

:1:1
 :
 :

:
 :

ASA 500 GE

- (10)
- UV

-
- 60%

-
- 45%

1. 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。

- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。
 - 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。
- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。

- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。
- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。

- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。
- 本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。

本規範係根據「建築師法」及「建築師法施行細則」之規定，由本會建築師公會訂定之。





Warranty 25-years





Warranty 25-years



Warranty 25-years

ABOUT US



QUALITY, INNOVATION, STRUGGLE, WIN-WIN


we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



PRODUCTION PROCESS



① Raw Materials

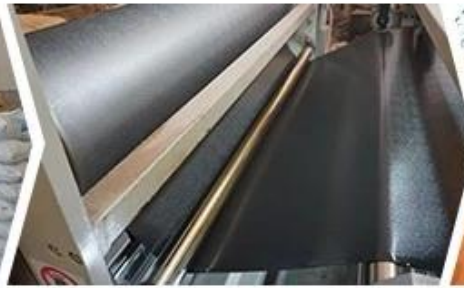

② Extrusion



③ Compression Molding



④ Cutting



⑤ Finished Product



⑥ Inspection

CERTIFICATE

Foshan Supervision Testing Centre of Quality
Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth, without cracks, pits, warping, and other defects.
2	Surface layer thickness	mm	≥10
3	Flexure strength	MPa	≥10
4	Breakage strength	N	≥100
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥1000
7	Density	g/cm³	≥1.8
8	Water absorption	%	≤1.0
9	Freeze-thaw resistance	cycles	≥50
10	Impact resistance	J/m²	≥10
11	Fire resistance	h	≥1.0
12	Sound absorption	α	≥0.2
13	Load performance	N	≥1000
14	Flexural strength	MPa	≥10
15	Flexural strength	MPa	≥10
16	Flexural strength	MPa	≥10

Foshan Supervision Testing Centre of Quality
Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth, without cracks, pits, warping, and other defects.
2	Surface layer thickness	mm	≥10
3	Flexure strength	MPa	≥10
4	Breakage strength	N	≥100
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥1000
7	Density	g/cm³	≥1.8
8	Water absorption	%	≤1.0
9	Freeze-thaw resistance	cycles	≥50
10	Impact resistance	J/m²	≥10
11	Fire resistance	h	≥1.0
12	Sound absorption	α	≥0.2
13	Load performance	N	≥1000
14	Flexural strength	MPa	≥10
15	Flexural strength	MPa	≥10
16	Flexural strength	MPa	≥10

celab
CERTIFICATE

On behalf of
FOOSHAN ZHONG XING CHENG PLASTIC FACTORY
Plastic Tile
Model: ASA-1

Test Report

Test Results:

Item	Result	Requirement
1. Appearance	Pass	Pass
2. Surface layer thickness	10.5 mm	≥10 mm
3. Flexure strength	10.5 MPa	≥10 MPa
4. Breakage strength	100 N	≥100 N
5. Flexural strength	10.5 MPa	≥10 MPa
6. Flexural elastic modulus	1000 MPa	≥1000 MPa
7. Density	1.8 g/cm³	≥1.8 g/cm³
8. Water absorption	0.8%	≤1.0%
9. Freeze-thaw resistance	50 cycles	≥50 cycles
10. Impact resistance	10 J/m²	≥10 J/m²
11. Fire resistance	1.0 h	≥1.0 h
12. Sound absorption	0.2	≥0.2
13. Load performance	1000 N	≥1000 N
14. Flexural strength	10.5 MPa	≥10 MPa
15. Flexural strength	10.5 MPa	≥10 MPa
16. Flexural strength	10.5 MPa	≥10 MPa

celab
CERTIFICATE

On behalf of
FOOSHAN ZHONG XING CHENG PLASTIC FACTORY
Plastic Tile
Model: ASA-1

Test Report

Test Results:

Item	Result	Requirement
1. Appearance	Pass	Pass
2. Surface layer thickness	10.5 mm	≥10 mm
3. Flexure strength	10.5 MPa	≥10 MPa
4. Breakage strength	100 N	≥100 N
5. Flexural strength	10.5 MPa	≥10 MPa
6. Flexural elastic modulus	1000 MPa	≥1000 MPa
7. Density	1.8 g/cm³	≥1.8 g/cm³
8. Water absorption	0.8%	≤1.0%
9. Freeze-thaw resistance	50 cycles	≥50 cycles
10. Impact resistance	10 J/m²	≥10 J/m²
11. Fire resistance	1.0 h	≥1.0 h
12. Sound absorption	0.2	≥0.2
13. Load performance	1000 N	≥1000 N
14. Flexural strength	10.5 MPa	≥10 MPa
15. Flexural strength	10.5 MPa	≥10 MPa
16. Flexural strength	10.5 MPa	≥10 MPa

celab
CERTIFICATE

On behalf of
FOOSHAN ZHONG XING CHENG PLASTIC FACTORY
Plastic Tile
Model: ASA-1

Test Report

Test Results:

Item	Result	Requirement
1. Appearance	Pass	Pass
2. Surface layer thickness	10.5 mm	≥10 mm
3. Flexure strength	10.5 MPa	≥10 MPa
4. Breakage strength	100 N	≥100 N
5. Flexural strength	10.5 MPa	≥10 MPa
6. Flexural elastic modulus	1000 MPa	≥1000 MPa
7. Density	1.8 g/cm³	≥1.8 g/cm³
8. Water absorption	0.8%	≤1.0%
9. Freeze-thaw resistance	50 cycles	≥50 cycles
10. Impact resistance	10 J/m²	≥10 J/m²
11. Fire resistance	1.0 h	≥1.0 h
12. Sound absorption	0.2	≥0.2
13. Load performance	1000 N	≥1000 N
14. Flexural strength	10.5 MPa	≥10 MPa
15. Flexural strength	10.5 MPa	≥10 MPa
16. Flexural strength	10.5 MPa	≥10 MPa

