



| | |
|------------------------|---|
| 产品名称 | PVC anti-corrosion plastic roof sheet |
| 品牌 | ZXC |
| 产地 | Foshan city,Guangdong province,China(Mainland) |
| 材料 | Polyvinyl chloride,Calcium powder,other chemical materials |
| 厚度 | 10 mm |
| Certification | ISO9001 / SGS / CE |
| Minimum Order Quantity | 300 square meter |
| Delivery Time | 1x20GP for 6 days,1x40GP for 7 days |
| Supply Ability | We have 8 produce lines,about 13500 square meter every day |
| 付款方式 | T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C , |
| 服务 | Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it. |
| 包装 | Pallet or PE bag |
| 销售地区 | Guangzhou / Shenzhen / Foshan |
| 适用场所 | Factory,Warehouse,Farm,Market,Aisle.Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant |

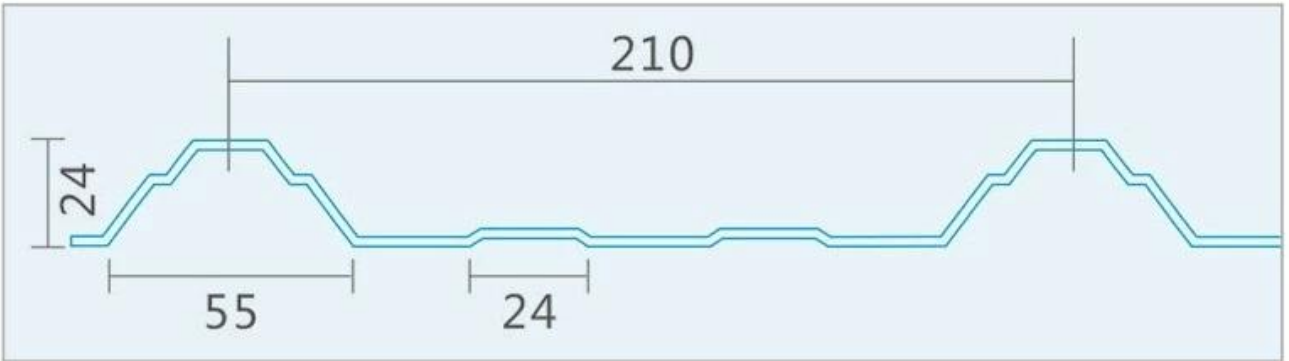


1130mm(Effective Width:1050mm)

| | |
|-----------------|----------------|
| Model Number | #1130-210-24 |
| 类型 | Trapezoid type |
| Overall Width | 1130mm |
| Effective Width | 1050mm |

| | |
|--------------|---|
| 厚度 | 1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm / 3.0mm |
| 长度 | 5.8meter / 11.8meter / Customized |
| 颜色 | White / Blue / Green / Red / Customized |
| Wave Spacing | 210mm |
| Wave Height | 24mm |
| 层数 | One layer / Two layers / Three layers |

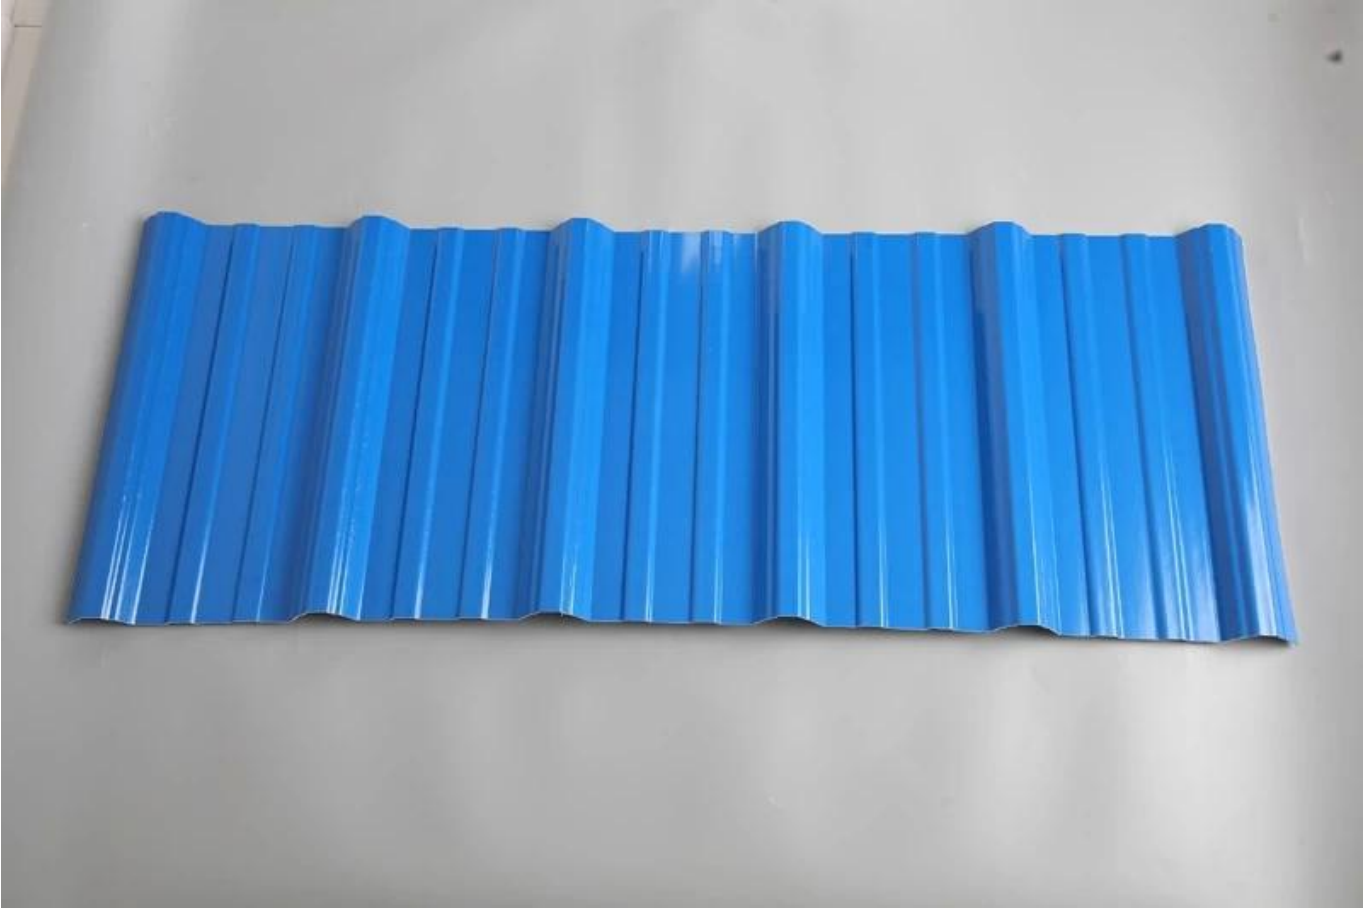

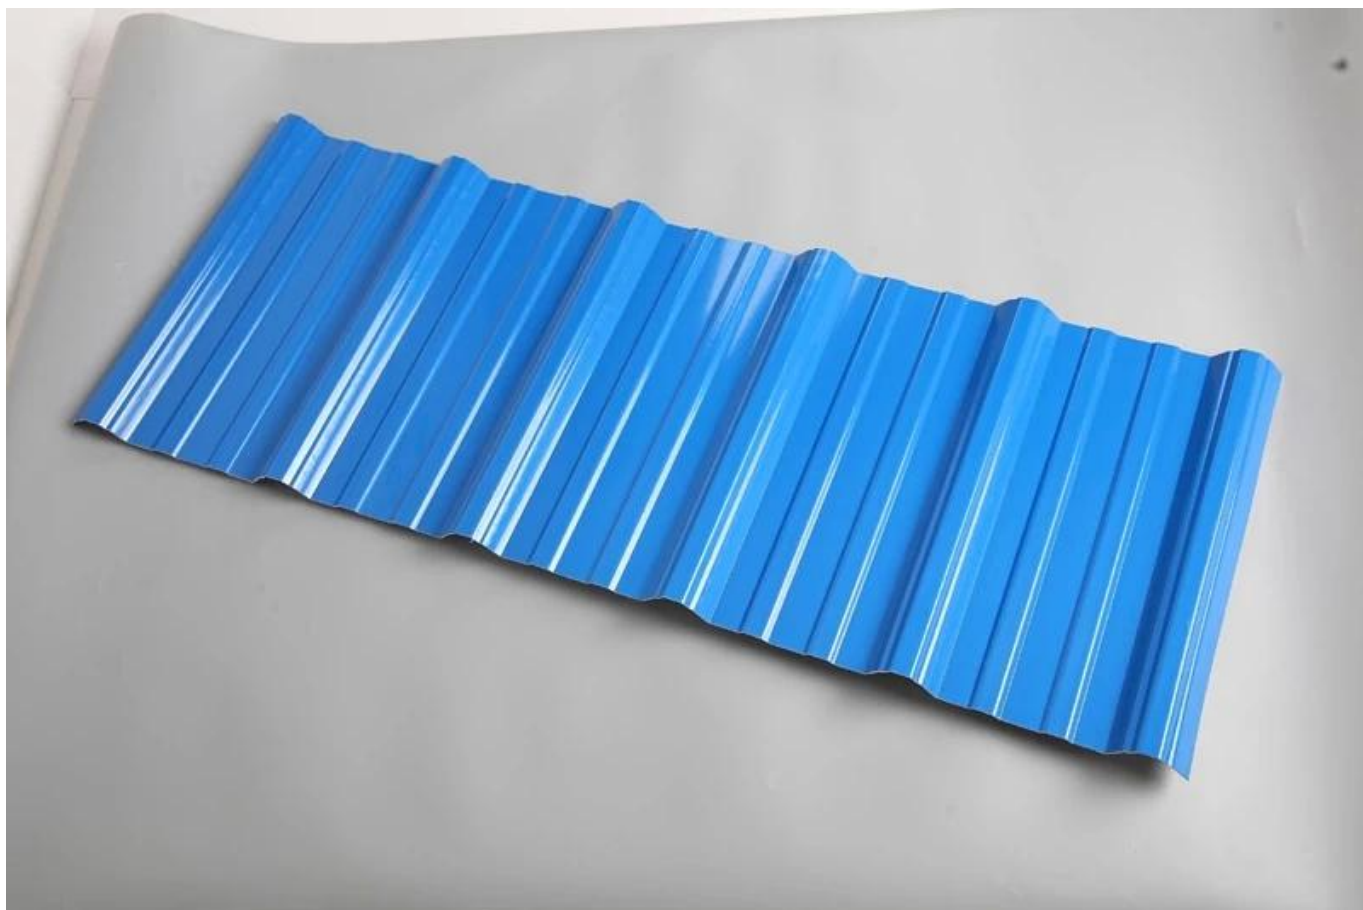



产品特点

• **Anti-corrosion**

• ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

• 耐候性

• ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

• **Fire Resistance**

• ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance \geq B1 grade.

• **Heat Insulation**

• ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

• **Sound Insulation**

• The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng PVC plastic roofing sheet has a good absorption of the noise effect, noise down 30dB than color steel tile.

