






物料名称	ASA 瓦片
规格	ZXC
产地	Foshan 佛山 (广东省)
材质	acrylonitrile styrene copolymer, polyvinyl 共聚物, 聚丙烯, 聚乙烯
厚度	25 mm
认证	ISO9001 / SGS / CE / 其他
重量	100 瓦片
包装	1x20GP 集装箱 6 个 1x40GP 集装箱 7 个
交货期	约 8 周 13500 瓦片
付款方式	T / T, 预付款 30% 1 / c,
贸易条款	(FCL) 或 (LCL)
表面处理	PE
产地	佛山 / Foshan
其他	Grange, 其他

物料名称	# 1050-160-30
规格	
重量	1050 mm
厚度	960mm
表面处理	2.3mm / 2.5mm / 2.8mm / 3.0mm
其他	
产地	佛山 / Foshan / 其他
重量	160 mm
厚度	30 mm



# More Types

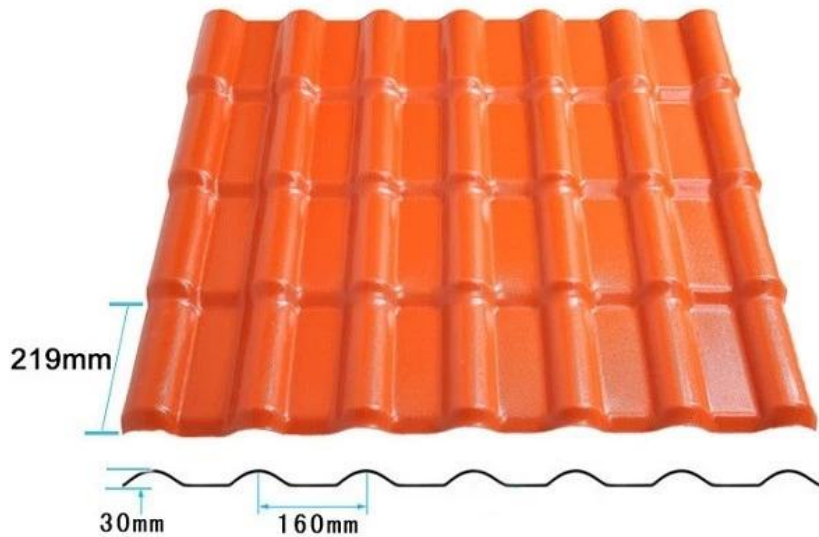

Overall Width: 1050mm

Effective Width: 960mm



Purplish Red

Brick Red

Sky Blue

Black

Dark Green



self-cleaning

The ASA Layer

The Backbone Layer

The Abrasion Resistance Layer



# resin roof tile accessories



▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

# Our Factory



Engineering case





# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without burr. Warpage should be less, and tolerance on warpage.	Complied	Pass
2	Water Absorption	mm	≤ 0	0	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Slip-resistance	1/100	---	175	Pass
5	Flexure strength	MPa	≥ 30	30	Pass
6	Impaction of break	%	≤ 20	10	Pass
7	Surface flatness (1kg/2kg)	---	No qualitative marks or marks other report out.	Complied	Pass
8	Acid resistance (10%, HCl, 3h)	---	No obvious color change or delamination phenomenon.	Complied	Pass
9	Alkali resistance (10%, NaOH, 3h)	---	No obvious color change or delamination phenomenon.	Complied	Pass
10	Impact resistance (pendulum hammer)	mm	≤ 10	12	Pass
11	Change index	%	≤ 10	7.6	Pass


Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	---	The surface should be smooth with uniform coloration and no obvious cracks, hole, scratch, bubble, or other defect, color difference.	Complied	Pass
2	Surface Layer Thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	MPa	≥ 20	26	Pass
4	Bonding strength	MPa	≥ 2.0	4.0	Pass
5	Flexural strength	MPa	≥ 20	33	Pass
6	Flexural Modulus	MPa	≥ 2000	3600	Pass
7	Density	g/cm³	≥ 2.3	2.34	Pass
8	Water absorption	%	≤ 0.5	0.3	Pass
9	Water absorption (20°C)	%	≤ 0.5	0.3	Pass
10	Water absorption (30°C)	%	≤ 0.5	0.3	Pass
11	Water absorption (40°C)	%	≤ 0.5	0.3	Pass
12	Water absorption (50°C)	%	≤ 0.5	0.3	Pass
13	Water absorption (60°C)	%	≤ 0.5	0.3	Pass
14	Water absorption (70°C)	%	≤ 0.5	0.3	Pass
15	Water absorption (80°C)	%	≤ 0.5	0.3	Pass
16	Water absorption (90°C)	%	≤ 0.5	0.3	Pass
17	Water absorption (100°C)	%	≤ 0.5	0.3	Pass



# Packaging



# FAQ

\* 如何查詢產品價格？

\* 如何查詢產品規格？ 請到本公司網站查詢或致電本公司 查詢  
本公司產品規格及圖紙均備有中英文說明書，歡迎索取。  
本公司產品規格及圖紙均備有中英文說明書，歡迎索取。

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？ OEM 或 ODM 均可，歡迎垂詢。

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙？

\* 如何查詢產品圖紙： T / T 30% 預付，其餘貨到後付。

• 如何查詢產品圖紙： 貨到後 7 天內付款，其餘貨到後 30%

• 如何查詢產品圖紙： FOB: Foshan, 歡迎垂詢。