



ASA	ASA
ASA	ASA
ASA	ASA (ASA)
ASA	Acrylonitrile Styrene ASA, ASA, ASA
ASA	25
ASA	ISO9001 / SGS / CE / ASA
ASA	100 ASA
ASA	1x20GP ASA 6, 1x40GP ASA 7
ASA	ASA 8 ASA 13,500 ASA
ASA	T/T ASA 30% ASA
ASA	ASA Full Container Load (FCL) ASA (LCL) ASA
ASA	ASA PE
ASA	ASA / ASA / ASA
ASA	ASA, ASA, ASA, ASA, ASA, ASA, ASA Flat to Slope ASA





品名	#1050-160-30
規格	品名
標準寸法	1,050mm
有効寸法	960mm
厚さ	2.3mm / 2.5mm / 2.8mm / 3.0mm
重量	品名
単位	mm / mm / mm / mm / mm
波高	160mm
波幅	30mm
波長	219mm

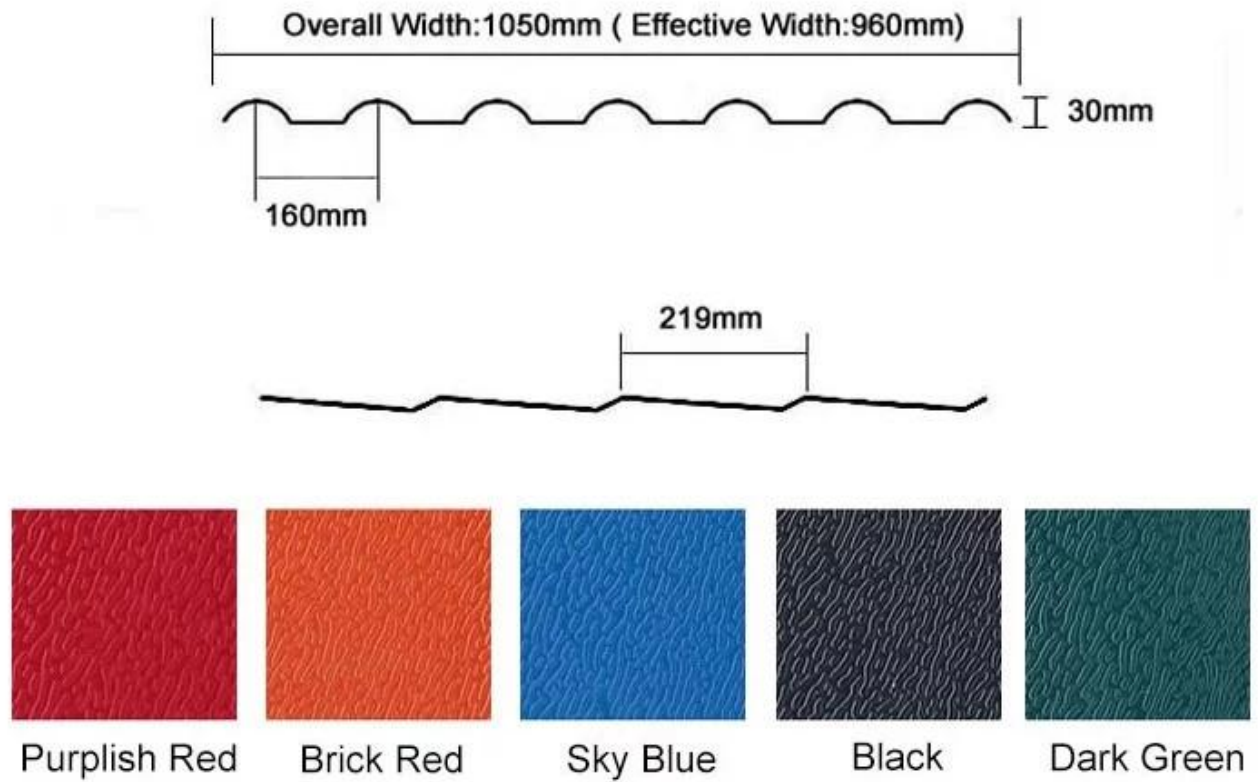

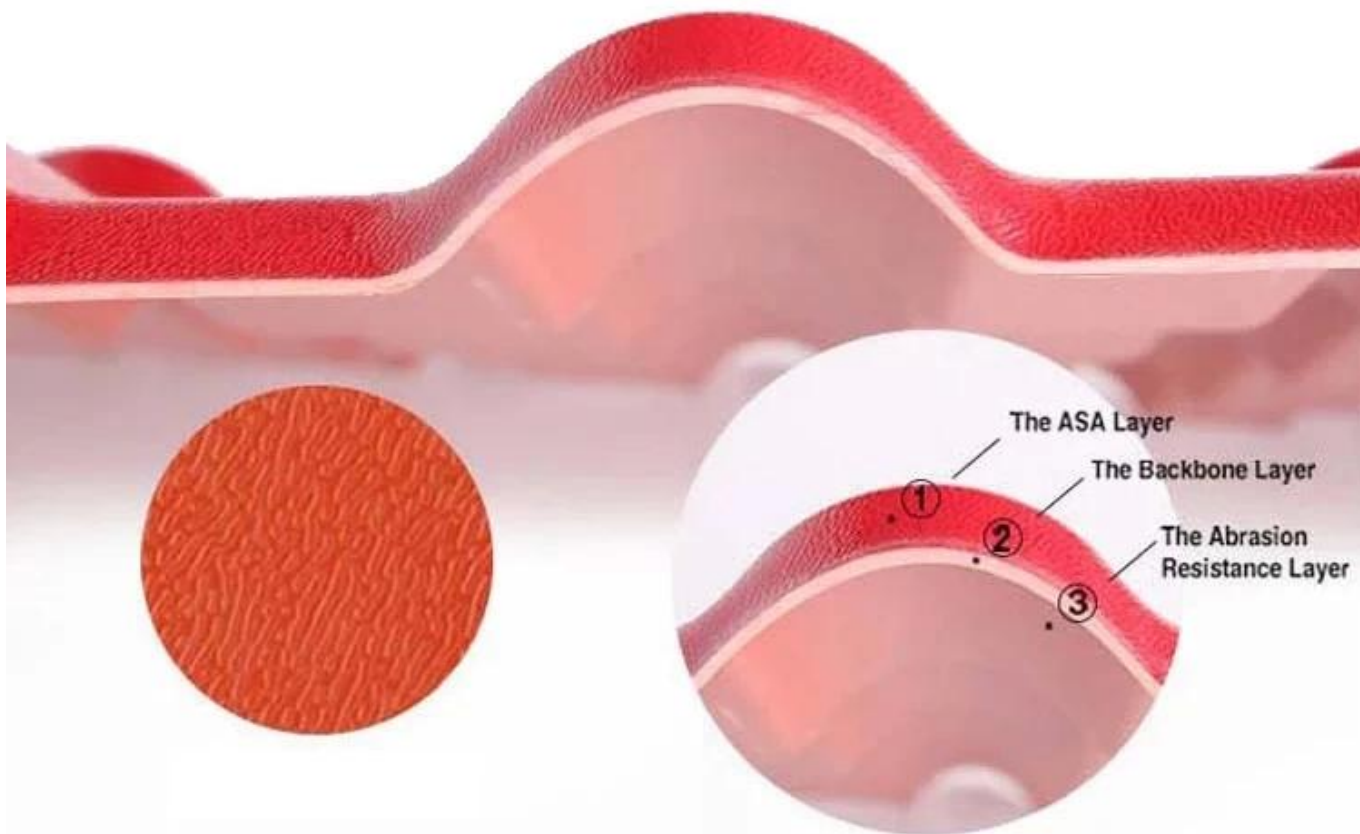

ASA 500 GE

:ASA 500 GE 10 0.15 . 0.15-0.18 .

:1:1

:1:1

ASA 500 GE

- (10)
- UV

-
- 60%

-
- 45%



Warranty 25-years



Warranty 25-years





Warranty 25-years



Warranty 25-years

ABOUT US



QUALITY, INNOVATION, STRUGGLE, WIN-WIN


we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



PRODUCTION PROCESS



① Raw Materials

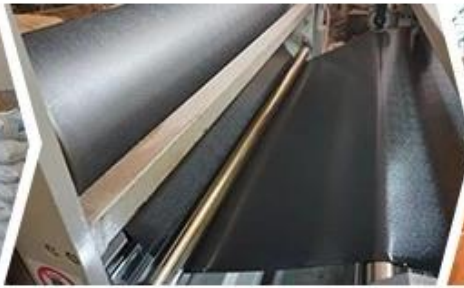

② Extrusion



③ Compression Molding



④ Cutting



⑤ Finished Product



⑥ Inspection

CERTIFICATE

Foshan Supervision Testing Centre of Quality

Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	24.1.1
2	Surface layer thickness	mm	24.1.2
3	Flexural strength	MPa	24.1.3
4	Compressive strength	MPa	24.1.4
5	Flexural modulus	MPa	24.1.5
6	Impact strength	kJ/m ²	24.1.6
7	Water absorption	%	24.1.7
8	Water absorption (24h)	%	24.1.8
9	Water absorption (7 days)	%	24.1.9
10	Water absorption (28 days)	%	24.1.10
11	Water absorption (90 days)	%	24.1.11
12	Water absorption (180 days)	%	24.1.12
13	Water absorption (360 days)	%	24.1.13
14	Water absorption (720 days)	%	24.1.14
15	Water absorption (1440 days)	%	24.1.15
16	Water absorption (2880 days)	%	24.1.16
17	Water absorption (5760 days)	%	24.1.17
18	Water absorption (11520 days)	%	24.1.18
19	Water absorption (23040 days)	%	24.1.19
20	Water absorption (46080 days)	%	24.1.20

Foshan Supervision Testing Centre of Quality

Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	24.1.1
2	Surface layer thickness	mm	24.1.2
3	Flexural strength	MPa	24.1.3
4	Compressive strength	MPa	24.1.4
5	Flexural modulus	MPa	24.1.5
6	Impact strength	kJ/m ²	24.1.6
7	Water absorption	%	24.1.7
8	Water absorption (24h)	%	24.1.8
9	Water absorption (7 days)	%	24.1.9
10	Water absorption (28 days)	%	24.1.10
11	Water absorption (90 days)	%	24.1.11
12	Water absorption (180 days)	%	24.1.12
13	Water absorption (360 days)	%	24.1.13
14	Water absorption (720 days)	%	24.1.14
15	Water absorption (1440 days)	%	24.1.15
16	Water absorption (2880 days)	%	24.1.16
17	Water absorption (5760 days)	%	24.1.17
18	Water absorption (11520 days)	%	24.1.18
19	Water absorption (23040 days)	%	24.1.19
20	Water absorption (46080 days)	%	24.1.20

celab

CERTIFICATE

CONSTRUCTION PRODUCTS DIRECTIVE

On Behalf of
FOSHAN ZHONG XING CHENG PLASTIC FACTORY

Product: Plastic Tile

Model: ASA-1

Tested For: FOSHAN ZHONG XING CHENG PLASTIC FACTORY
No. 36, Industry Road, Daxian, Foshan, Guangdong, China

Tested By: BEIDE (UK) PRODUCT SERVICE LIMITED
U.K. Flat 107, 25 INDESCON SQUARE, LONDON, UNITED KINGDOM

CHINA: SF, Bldg E, Houshi 3rd Ind Zone, Xixiang, Bao'an Dist, Shenzhen, China

Date of Test: Feb. 10-Mar. 10, 2016
Date of Report: Mar. 11, 2016
Report Number: B-01000170

Beide

Appendix 1

Plastic Tiles