

|                        |   |
|------------------------|---|
| 产品名称                   | ZXC round wave and trapezoid PVC roofing sheet in different colors  |
| 品牌                     | ZXC   |
| 产地                     | Foshan city,Guangdong province,China(Mainland)  |
| 材料                     | Polyvinyl chloride,Calcium powder,other chemical materials  |
| 厚度                     | 10 mm   |
| Certification          | ISO9001 / SGS / CE  |
| Minimum Order Quantity | 300 square meter  |
| Delivery Time          | 1x20GP for 6 days,1x40GP for 7 days   |
| Supply Ability         | We have 8 produce lines,about 13500 square meter every day  |
| 付款方式                   | T/T , firstly pay 30% deposit,before loading container pay rest of payment<br>L/C ,   |
| 服务类型                   | Full Container Load (FCL) Service,We do it by myself.<br>Less than Container Load (LCL) Service,We find our agents to do it.  |
| 包装方式                   | Pallet or PE bag  |
| 交货地点                   | Guangzhou / Shenzhen / Foshan   |
| 适用场所                   | Factory,Warehouse,Farm,Market,Aisle.Especially in corrosive chemical plants, smelters, ceramic plants, soy sauce factory, chemical plants, printing and dyeing plant, organic solvent factory, acid, alkali and other corrosive plant |




**1130mm(Effective Width:1050mm)**

|                 |                |
|-----------------|----------------|
| Model Number    | #1130-210-24   |
| 类型              | Trapezoid type |
| Overall Width   | 1130mm         |
| Effective Width | 1050mm         |

|              |   |
|--------------|---|
| □□□□□□       | 1.3mm / 1.5mm / 1.8mm / 2.0mm / 2.3mm / 2.5mm / 2.8mm / 3.0mm |
| □□□□□□       | 5.8meter / 11.8meter / Customized                             |
| □□           | White / Blue / Green / Red / Customized                       |
| Wave Spacing | 210mm   |
| Wave Height  | 24mm  |
| □□□□         | One layer / Two layers / Three layers                         |



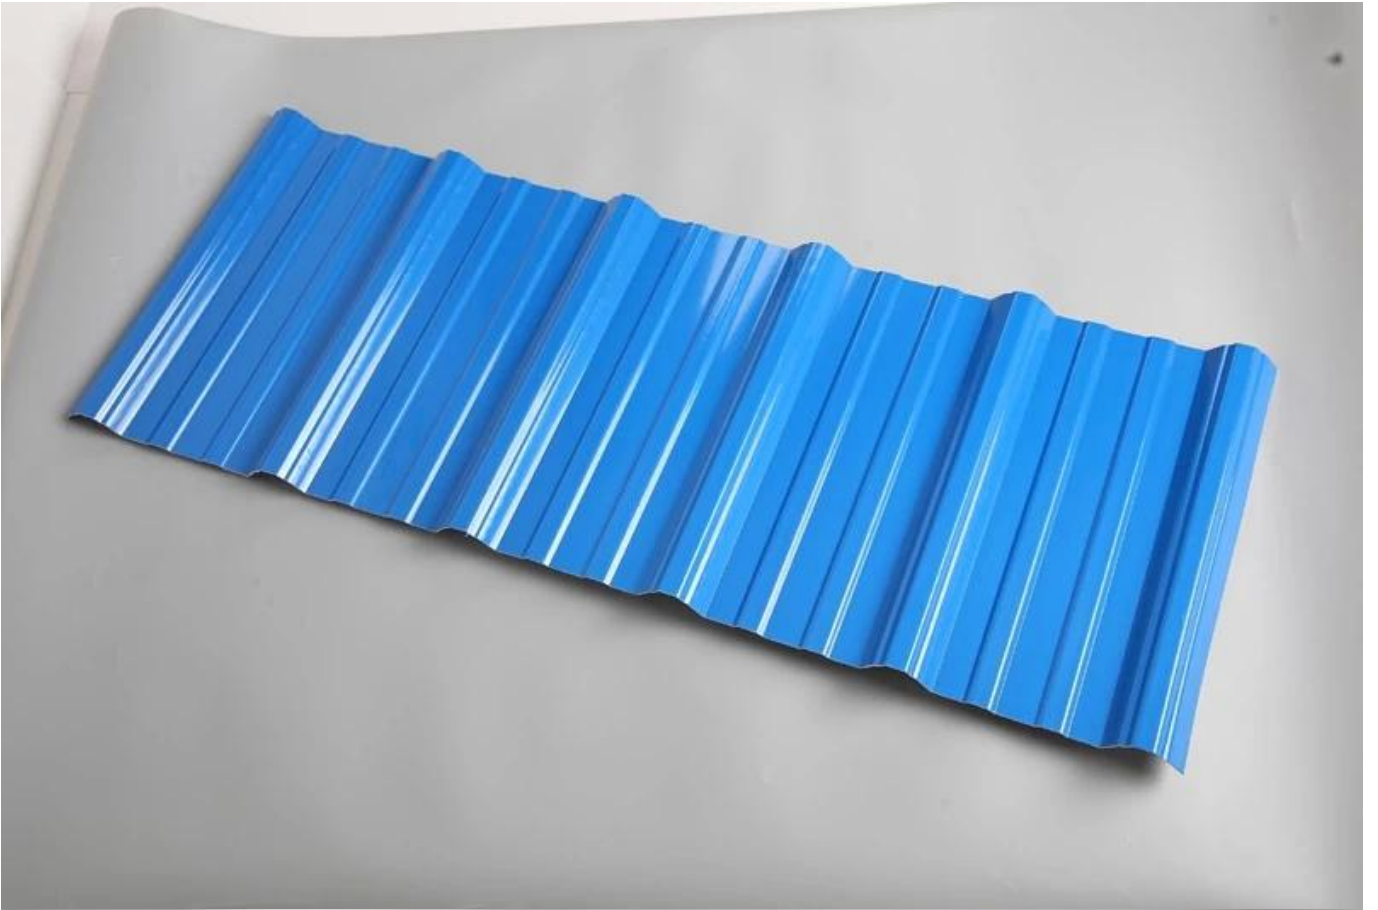



## 产品特点

### • **Anti-corrosion**

• ZhongXingCheng PVC plastic roofing sheet in the long term against acid, alkali, salt and other corrosive chemicals. Experiments prove that: In the salt, alkali and 60% following a 24-hour soaking in acid, no chemical reaction. Very suitable for acid rainprone areas and coastal use, the effect was particularly significant.

### • 耐候性

• ZhongXingCheng PVC plastic roofing sheet's surface materials is co-extruded in ultra-weather surface layer resin to ensure the durability of products (for 15 years in quality assurance).

### • **Fire Resistance**

• ZhongXingCheng PVC plastic roofing sheet is a flame retardant materials, through the national fire authority of the department according to GB8624-2006 standards for testing, fire safety performance  $\geq$  B1 grade.

### • **Heat Insulation**

• ZhongXingCheng PVC plastic roofing sheet's thermal conductivity coefficient is 0.325w/mk, clay tile is about 1 / 310, cement tile 1 / 5, 0.5mm thick color steel tile 1 / 2000. Therefore, without considering the case of insulation layer increases, the PVC plastic roofing sheet can still achieve the best thermal insulation properties.

### • **Sound Insulation**

• The tests prove that: in suffering heavy rain, high winds the impact of outside noise, ZhongXingCheng PVC plastic roofing sheet has a good absorption of the noise effect, noise down 30dB than color steel tile.

