

Product show

FRP (FRP)

FRP

FRP

FRP

FRP

FRP 60-85%

FRP

FRP

FRP 1.3-2.0

FRP 1 / 4-1 / 5

FRP

FRP 80

FRP 130

FRP

FRP

FRP 10

ZXC

ZXC

ZXC



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

FRP LIGHTING ROOF TILE




***10-year
warranty***



Item Description	frp-01
Item Description	frp-01
Item Description	Item Description
Item Description	6000 mm, 11800 mm. Item Description
Item Description	Item Description, Item Description
Item Description	930mm
Item Description	840mm
Item Description	660mm
Item Description	1.0±0.1mm
	1.2 ± 0.1 mm
	1.5 ± 0.1 mm
	2.0±0.1mm
Item Description	1.7±0.1mm./mm-
	2.1±0.1mm./mm-
	2.6±0.1mm./mm-
	3.0±0.1mm./mm-
Item Description	
mm-/20 FCL (21 mm)	mm-/40 FCL (26 mm)
12,000 mm-	15,000 mm-
10,000 mm-	12300 mm-
8000m2	10,000 mm-
7000m2	8600m2

CUSTOMER CASE SHOW

Has more than ten years of production experience

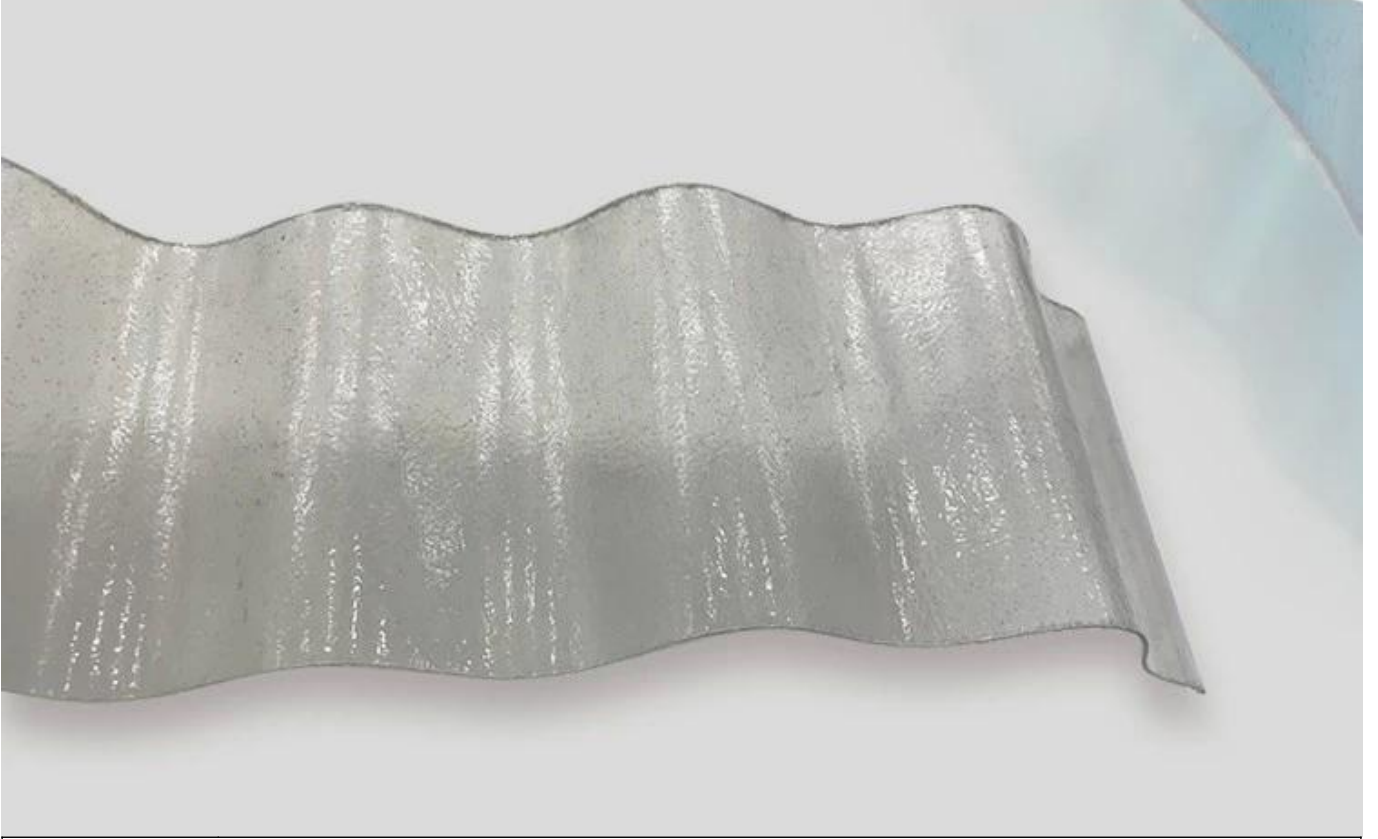

厚度:	1.0 mm-2.8 mm
规格:	1130/ 930/ 900/ 840mm
表面:	拉丝/ 氧化
用途:	建筑装饰/ 工业应用
产地:	中国
联系方式:	0086-757-83338888 0086-138-2211-1111 0086-138-2211-1111 0086-138-2211-1111 0086-138-2211-1111

A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue





grass green



Beige

PRODUCT DISPLAY

Authentic product photography highlights the quality of details

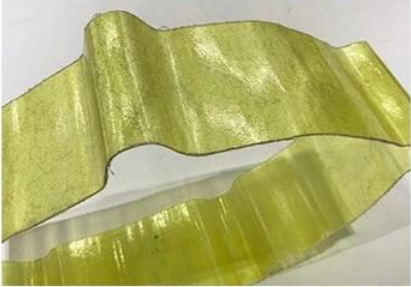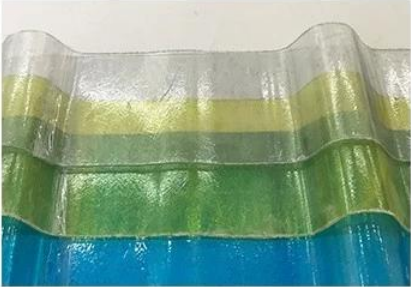

CUSTOMER CASE SHOW

More than ten years of production experience



APPLICABLE SCENE DISPLAY

scope of application

~



planting shed

Rainproof, constant temperature
moisturizing space, transparent



roof

Good light transmission
performance, no rain leakage



Villa shed

Bright colors, more class



Recreation area

Color unevenness due to weathering

SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered



*sound
insulation*

*Anti
-corrosion*

insulation


*High
temperature
resistance*

*anti
-stress*



“ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy

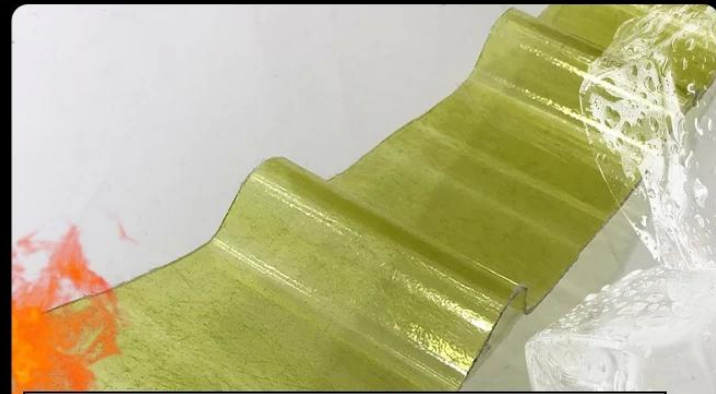

01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



04 Impact resistance

Shock resistant, not easy to break



05 Good flame retardant performance

Maintain stable performance in the temperature range of -40° - 120° without softening



06

Good light transmission

The light is astigmatism, the light is soft, and the light transmittance is high.


Our Factory

Zhongxingcheng New Material Co., Ltd. 專業生產各種塑料材料 各種規格 各種顏色
各種厚度 各種用途 各種材料 ASA,
各種規格 各種用途 各種材料 APVC, 各種規格 各種用途 各種材料 PVC, 各種規格 各種用途 各種材料 PVC,
各種規格 各種用途 各種材料 FRP, PVC, 各種規格 各種用途 各種材料 PC



FACTORY REAL SHOT DISPLAY

Professional production to do every step

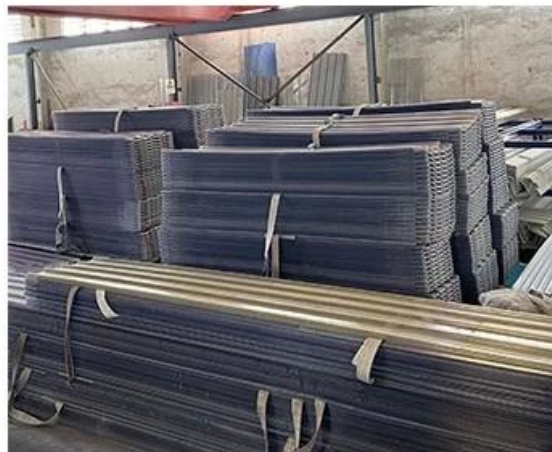

Sampling and testing each batch of products to ensure quality

X



DISPLAY

CUSTOM PROCESS

Easy shopping, quality assurance,
after-sales rest assured



01

ONLINE CONSULTATION

Provide professional product
consultation



02

PROVIDE PRICING

Provide reasonable price for
product performance

03

PREPAID CUSTOMIZATION

Deposit in advance according
to different proportions





— **04** —

**ORDER
PRODUCTION**

Professional and rapid production
of multiple production lines

— **05** —

**AFTER
DELIVERY**

Intimate and assured after-sales
service



Exhibition



Certificate

