

# Product show

ZXC 产品 [FRP 产品](#) 产品

FRP 产品: 产品  
产品  
产品

FRP 产品: 产品 60-85% FRP 产品

产品: 产品 1.3-2.0 产品 1 / 4-1 / 5  
产品  
产品

FRP 产品 80 产品. 产品 130 产品. FRP 产品

产品, 产品: 产品 10 产品"



ZXC Roof Tile Industry

Reliable quality and worry-free after-sales

# FRP LIGHTING ROOF TILE



***10-year  
warranty***




FRP Specifications	FRP-01	
FRP Type	frp-01	
FRP Dimensions	6000mm, 11800mm	
FRP Thickness	930mm, 840mm, 660mm	
FRP Weight	1.0±0.1mm, 1.2±0.1mm, 1.5±0.1mm, 2.0±0.1mm	
FRP Strength	1.7±0.1mm/0.0-0, 2.1±0.1mm/0.0-0, 2.6±0.1mm/0.0-0, 3.0±0.1mm/0.0-0	
FRP Inventory		
FRP-01/20 FCL (21 FCL)	FRP-01/40 FCL (26 FCL)	
12,000 FCL	15,000 FCL	
10,000 FCL	12,300 FCL	
8000m2	10,000 FCL	
7000m2	8600m2	

FRP Specifications FRP Inventory

# CUSTOMER CASE SHOW

Has more than ten years of production experience

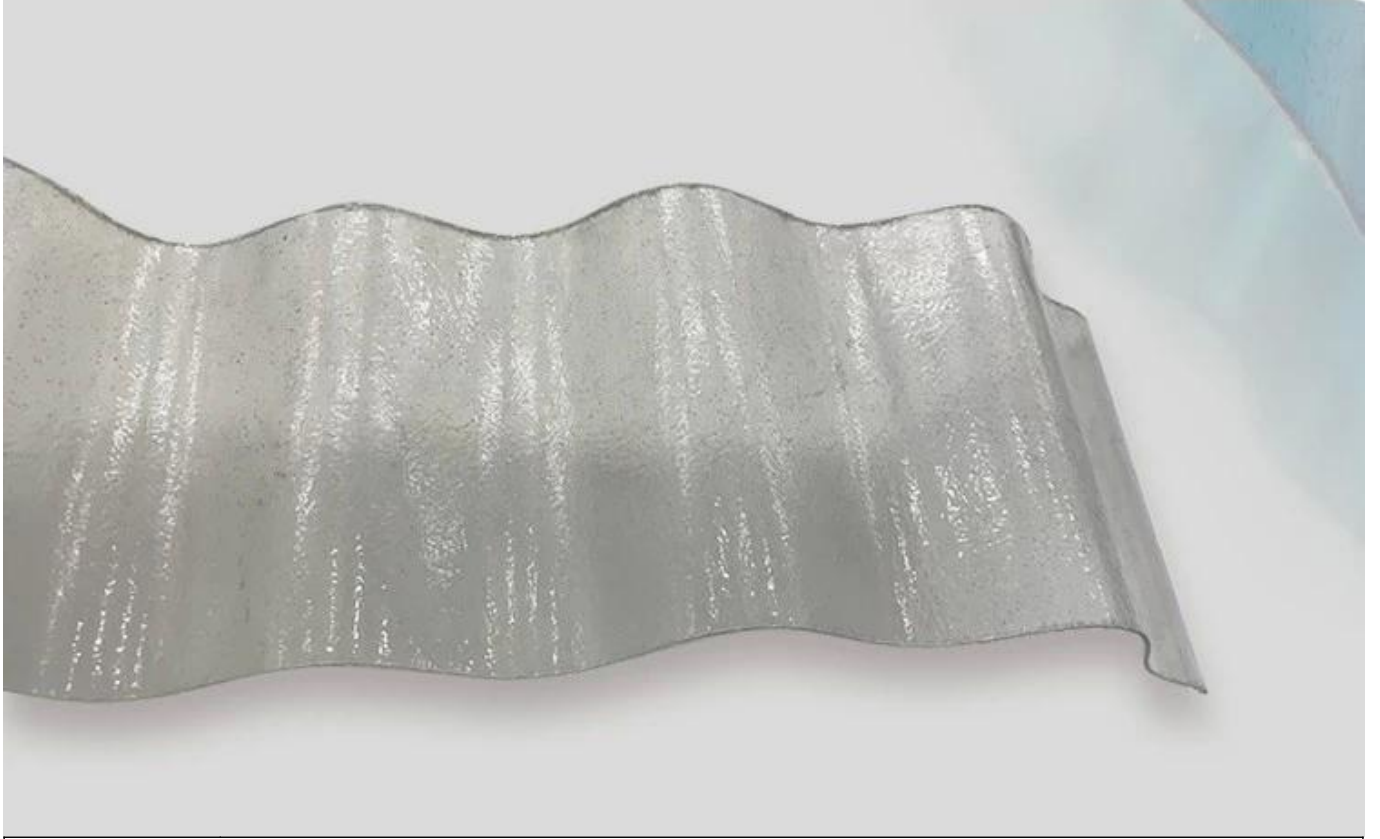

厚度:	1.0mm-2.8mm
规格:	1130/ 930/ 900/ 840
材质:	铝
用途:	各种工业用途
表面处理:	氧化
其他信息:	该产品具有优良的导电性和导热性，广泛应用于电子、电气、工业等领域。

# A variety of colors, can build different architectural styles

More colors can be customized



light yellow



blue



grass green




Beige

---

# PRODUCT DISPLAY

Authentic product photography highlights the quality of details

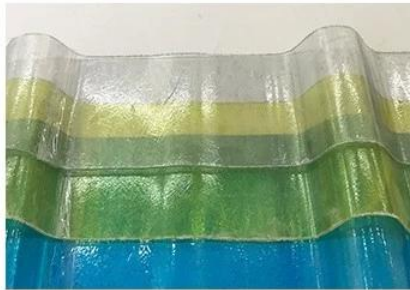

# CUSTOMER CASE SHOW

More than ten years of production experience



# APPLICABLE SCENE DISPLAY

scope of application

~



***planting shed***

Rainproof, constant temperature  
moisturizing space, transparent



***roof***

Good light transmission  
performance, no rain leakage



***Villa shed***

Bright colors, more class



***Recreation area***

Color unevenness due to weathering



# SIX REASONS TO CHOOSE US

“

Iron tiles can be directly covered



*sound  
insulation*

*Anti  
-corrosion*

*insulation*

*High  
temperature  
resistance*

*anti  
-stress*



# “ SIX PROPERTIES ”

Good quality and low price. Quality assurance, trustworthy



## 01 High temperature resistance, frost crack resistance

The product is a solid molecular material, and the operating temperature is -40°-120°



## 02 Strong bearing capacity, more impact resistance

Add high quality glass fiber



## 03 Iron tiles can be directly covered

Exclusive research and development technology, more cost-saving.



## **04** Impact resistance

Shock resistant, not easy to break



## **05** Good flame retardant performance

Maintain stable performance in the temperature range of  $-40^{\circ}$ - $120^{\circ}$  without softening




## Our Factory

Zhongxingcheng New Material Co., Ltd. 佛山市南海区 Foshan City, Nanhai District China  
ASA,  
APVC, PVC, PVC,  
FRP, PVC, PC



# FACTORY REAL SHOT DISPLAY

Professional production to do every step

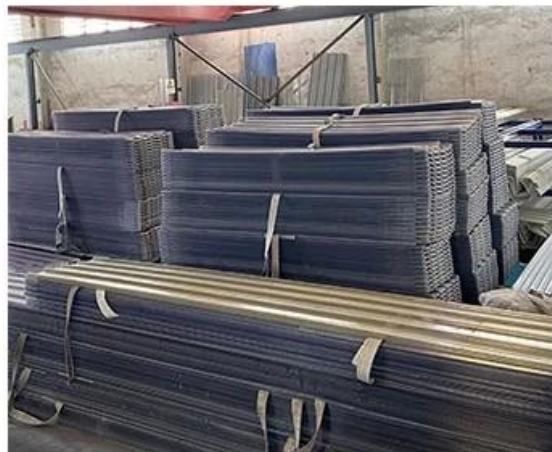

# Sampling and testing each batch of products to ensure quality

X



DISPLAY

# CUSTOM PROCESS

Easy shopping, quality assurance,  
after-sales rest assured



01

## ONLINE CONSULTATION

Provide professional product  
consultation



02

## PROVIDE PRICING

Provide reasonable price for  
product performance

03

## PREPAID CUSTOMIZATION

Deposit in advance according  
to different proportions







— **04** —

**ORDER  
PRODUCTION**

Professional and rapid production  
of multiple production lines

— **05** —

**AFTER  
DELIVERY**

Intimate and assured after-sales  
service



**Exhibition**



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



# Packaging



# FAQ

\* 如何包裝？

\* 如何包裝？  
如何包裝？  
如何包裝？  
如何包裝？

\* 如何包裝？

\* 如何包裝？

\* 請提供詳細的技術規格書及產品樣品？

\* 請提供 OEM 及 ODM 服務？

\* 請提供詳細的報價單？

\* 請提供詳細的生產及出貨時間表？

\* 請提供詳細的品質保證書？

\* 請提供詳細的包裝及運輸資訊？

\* 請提供詳細的付款條件？

\* 請提供詳細的付款條件：T/T 30% 預付

• 請提供詳細的付款條件：7 天內 30%

• FOB Shipping Port: 請提供詳細的港口資訊