


Product show


ASA合成树脂瓦 ASA合成树脂瓦的重量为 30 公斤
ASA合成树脂瓦具有耐候性好，耐高低温，耐酸碱，耐老化，不褪色，
抗风雪，抗紫外线，耐候性，隔音降噪，美观大方，使用寿命长，
绿色环保等优点。

ASA SYNTHETIC RESIN ROOFING TILES

Scenic areas and the pastoral farmhouse
use the most roofing tiles.

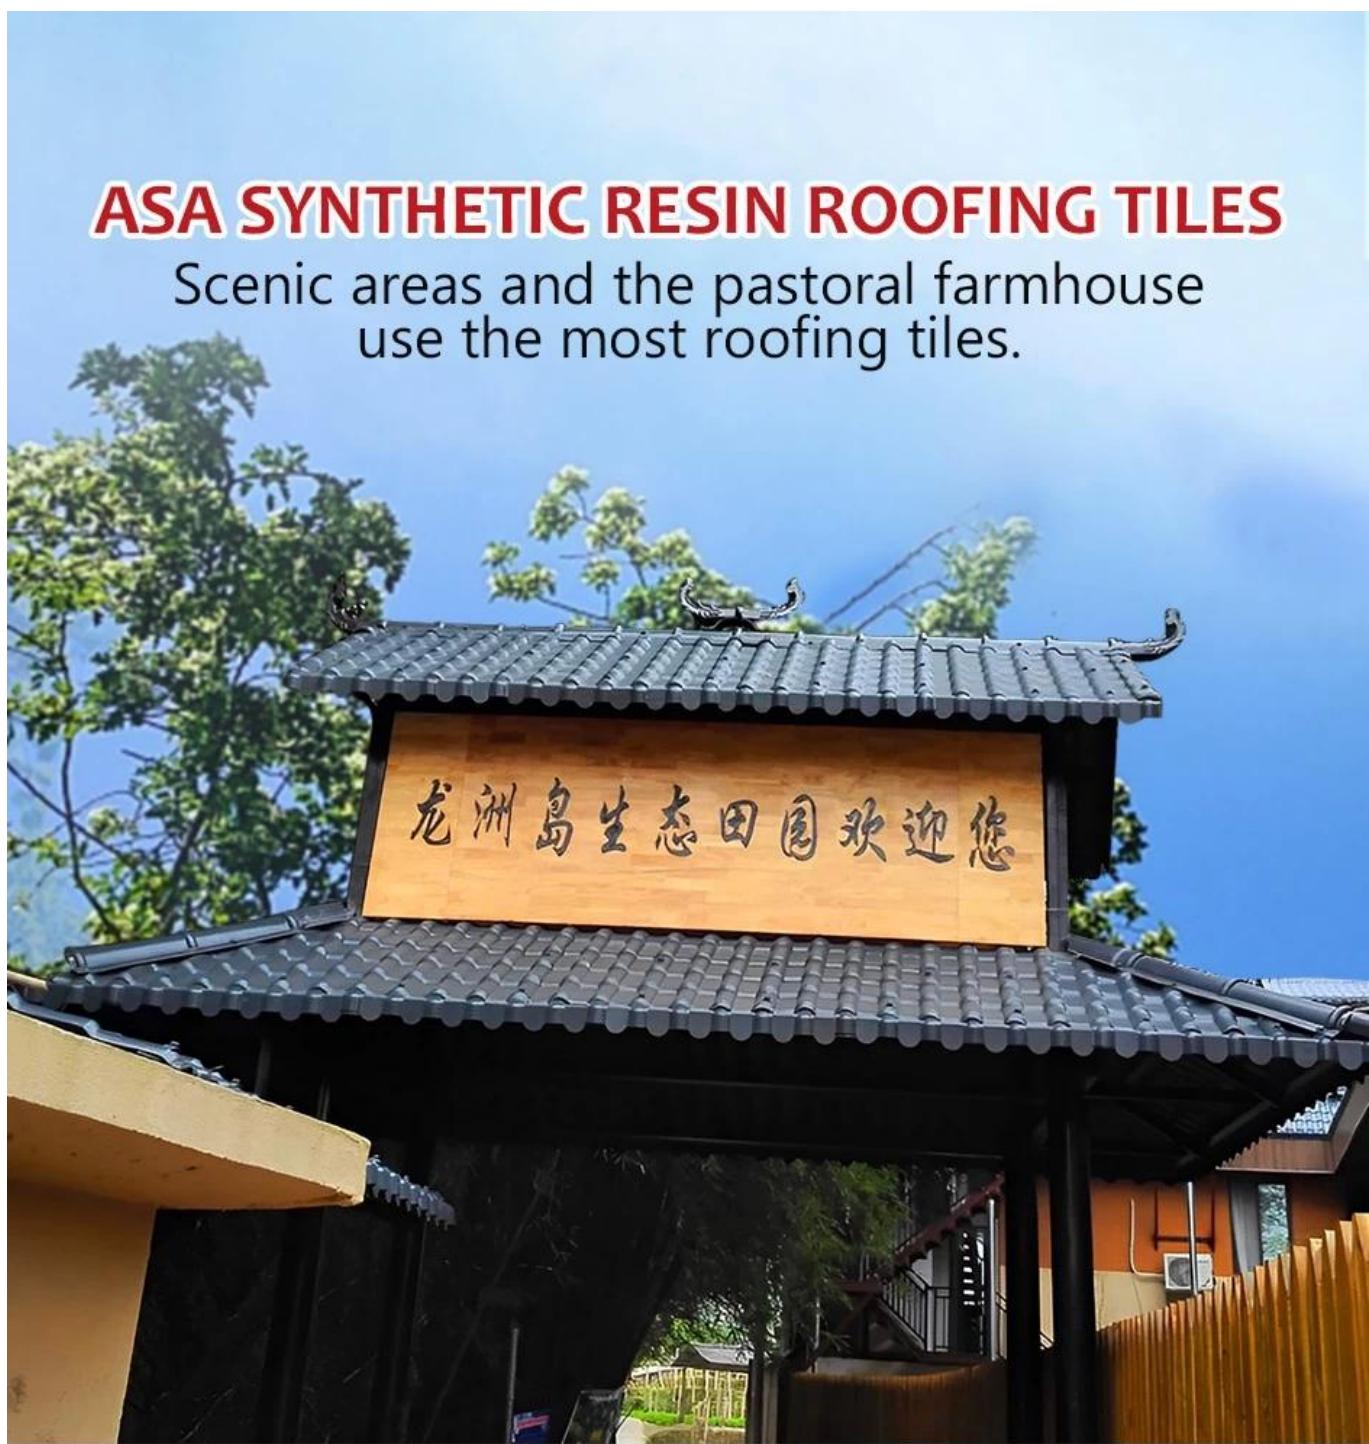



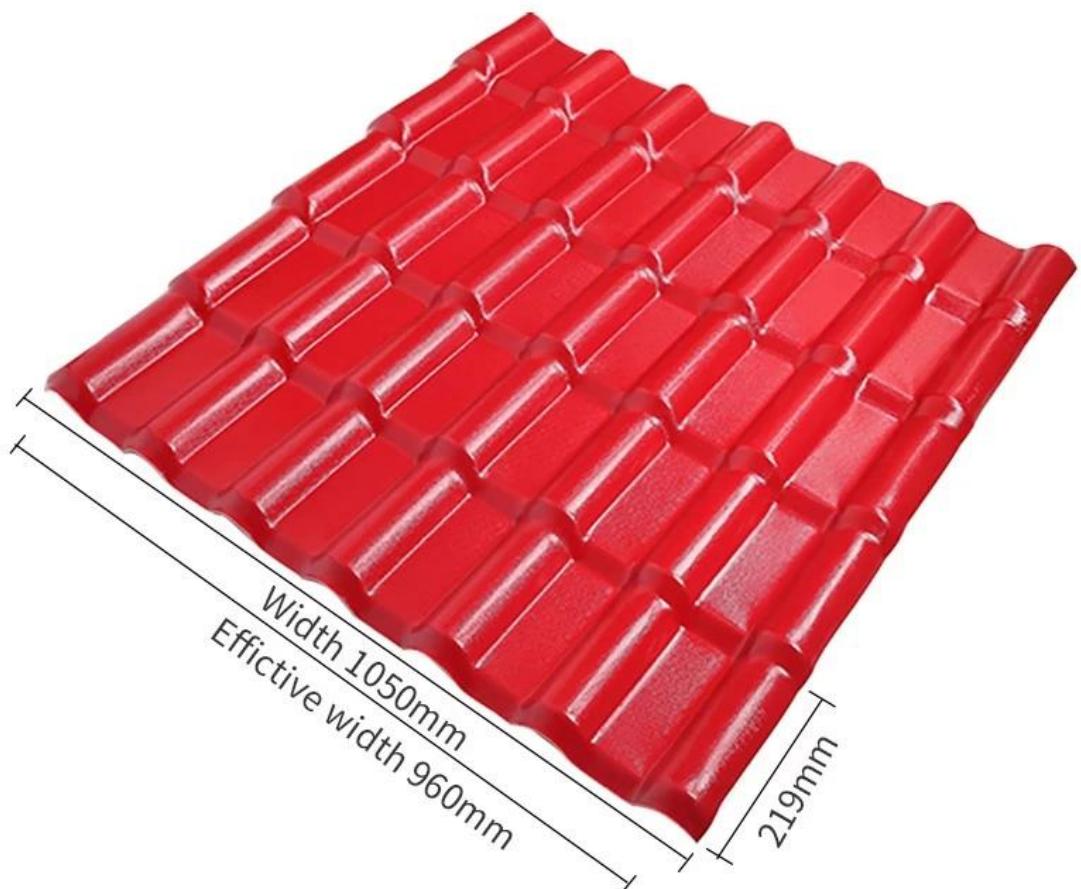

Name: synthetic resin

Model: 1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

Roofing accessories

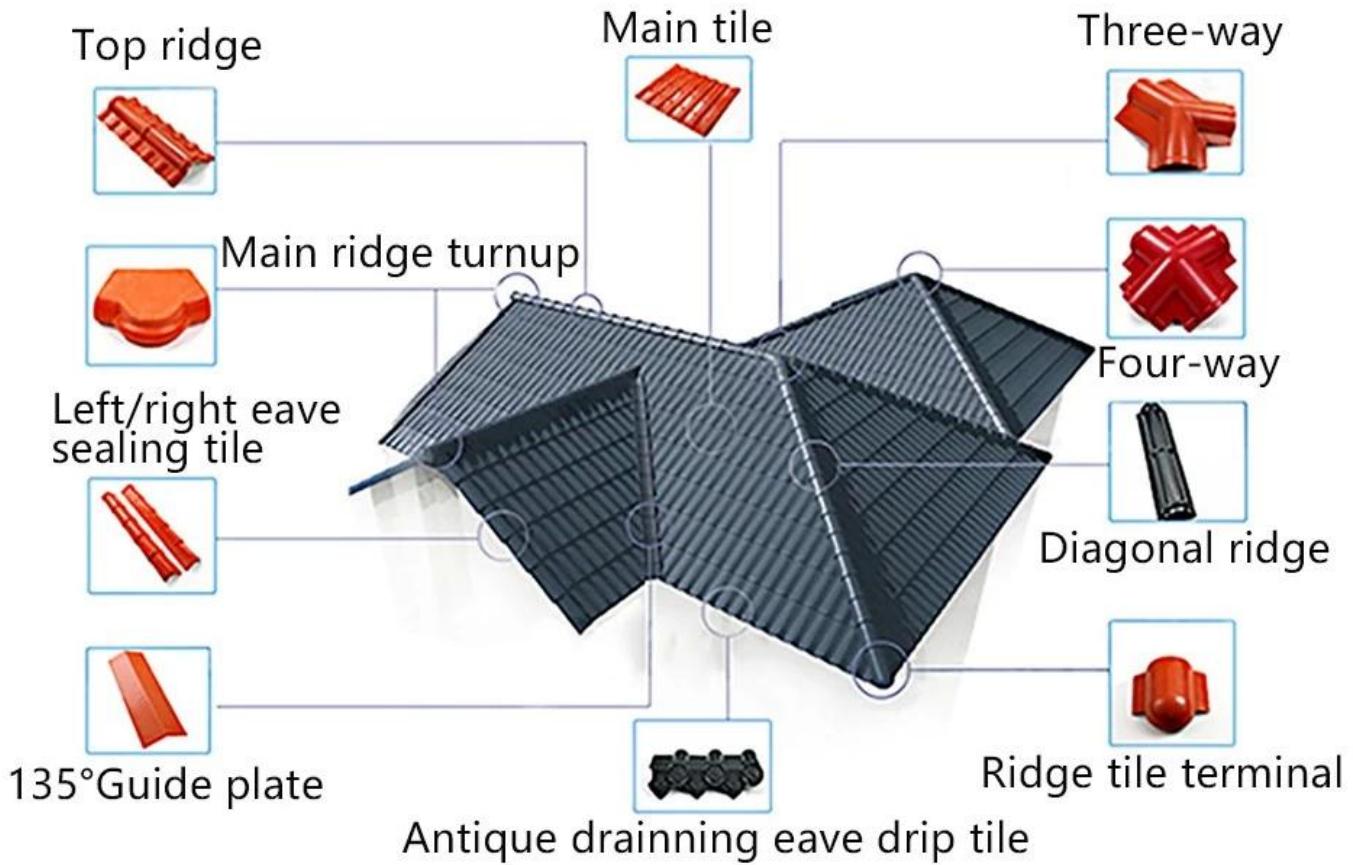


Installation considerations

1. The purlins can use square pipe (60x40x3mm)
2. The purlins can use C-shaped steel (100x50x20x3mm)
3. The purlins can use anti-corrosion wood square (60x40mm)
4. purlin spacing of 660mm

Dimensional measurement method


both sides

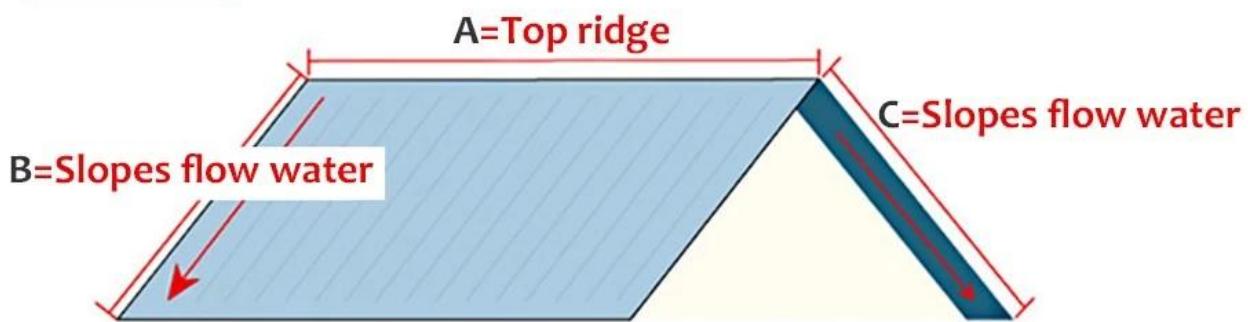

1. Measure the dimension of the A top ridge.
2. Measure the dimensions of B
3. Measure the dimensions of C

Measure all the dimensions (don't forget the eaves)

four sides

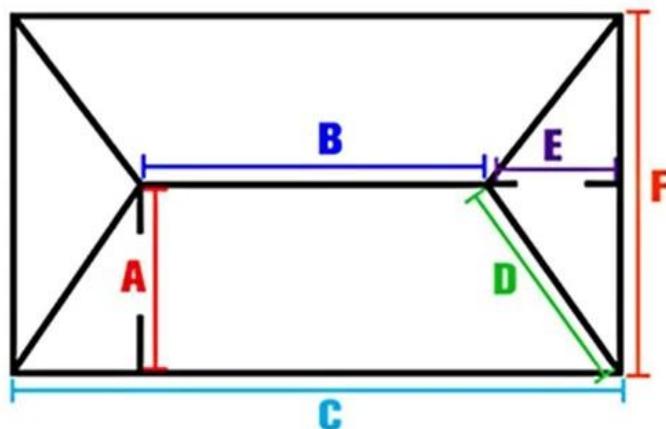

1. Measure the dimension of the B top ridge.
2. Measure the dimensions of ramp A
3. Measure the width of C
4. Measure the dimensions of the D diagonal ridge.
5. Measure the dimensions of ramp E
6. Measure the width of F

Measure all the dimensions (don't forget the eaves)

Our Factory

Zhongxingcheng New Material Co., Ltd. 佛山市众兴晟新材料有限公司 Foshan City, Nanhai District China
ASA, APVC, PVC, PVC, FRP, PVC, PC



Factory display



9 production lines




Raw material warehouse



Product comparison

Learn all about our products

Dacheng resin roofing tile

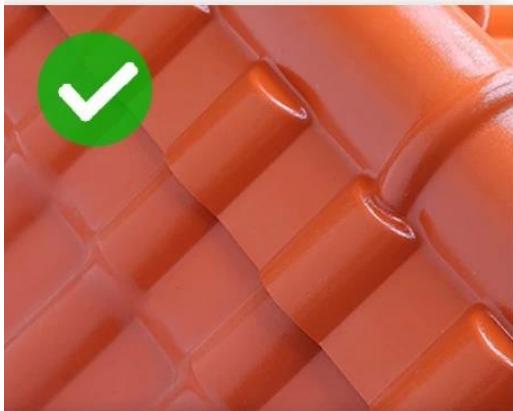

Brand new raw materials imported
bright color, long service life
30~50 years

Recyclable resin roofing tiles



Recycled materials, dull color, easy
to have black spots in appearance
very short life.



Brand new material, good
plasticization, long service life



Recyclable material, reduced
toughness, many impurities,
easy to break




ASA surface thickness 0.1~0.15mm
does not foam and does not fall off



The thickness of the surface layer of
the film is 0.05~0.1mm, which is
easy to blister and fall off

Exhibition

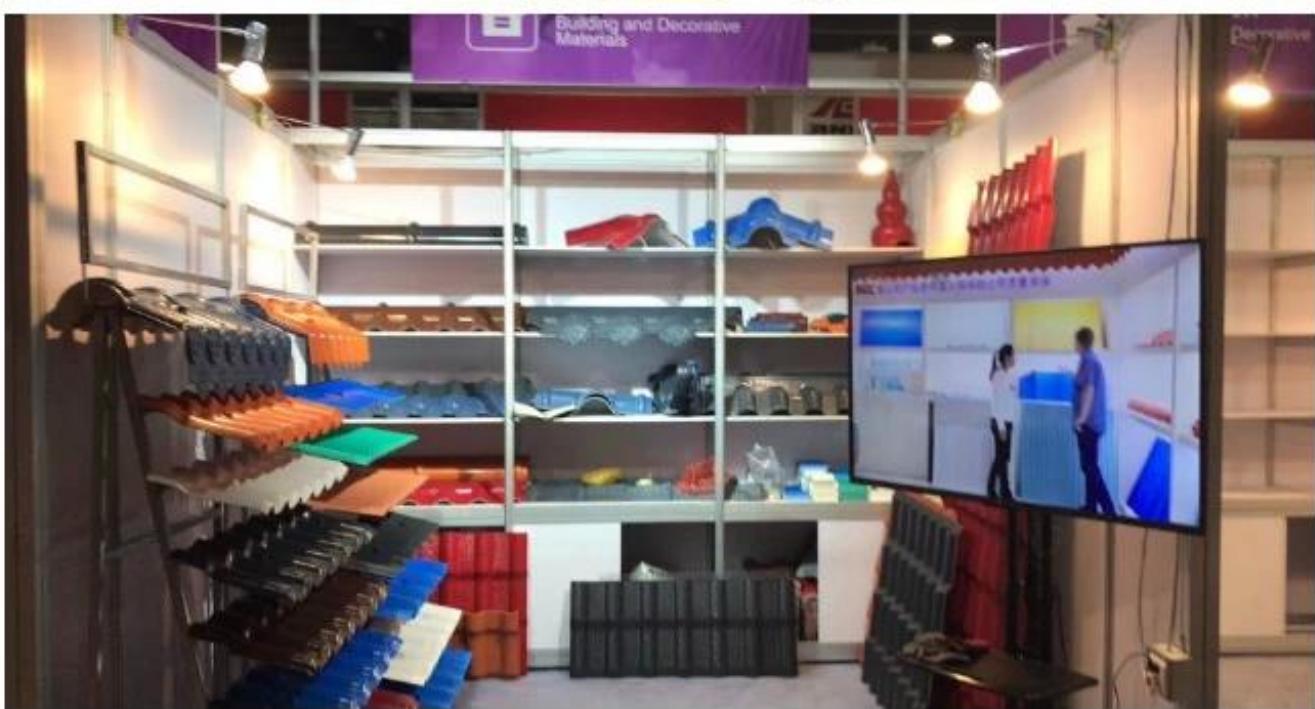

Certificate

Security sense of authoritative testing

Multiple quality inspection and testing
to ensure good quality.




IOS9000 certified



China Metrology Certification



CAL certification

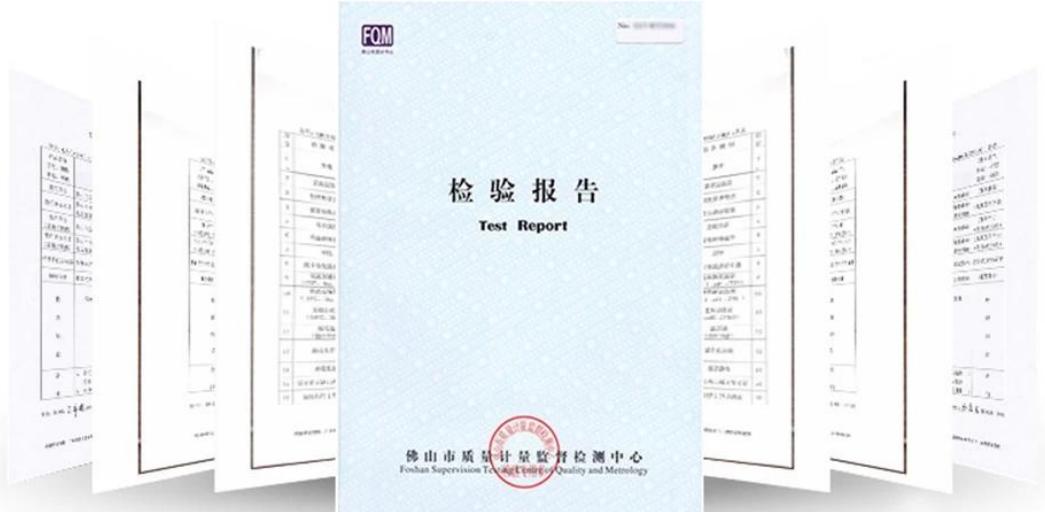

Packaging



FAQ

* 问：包装方式是什么？

* 答：我们提供多种包装服务，包括纸箱、塑料袋、泡沫箱等。根据您的需求，我们将选择最合适的包装方式。

* 问：包装费用是多少？

* 答：包装费用根据产品重量、尺寸和包装方式等因素而定。请咨询我们的客服人员以获取详细信息。

- * 请提供您的公司名称和地址？
- * 您是 OEM 还是 ODM 生产商？
- * 您的生产能力和年产量是多少？
- * 您的生产周期是多久？
- * 您的生产成本是多少？
- * 支付方式: T/T 预付款 30% 生产款 70%
- 交货港: 中国 7 月 30 日交货 30%
- FOB Shipping Port: 中国 7 月 30 日交货