






公司名稱	聯發科技股份有限公司
地址	台北市南港區新莊路88號
組織型態	股份有限公司
負責人	蔡明介
產品名稱	聯發科 Mediatek 晶片
產品描述	聯發科 Mediatek 晶片，包括 1x20GP、1x40GP 等型號
認證標準	ISO9001/CE
認證日期	2019年12月
認證地點	10500 台北市信義區
認證號碼	21900000000000000000
認證有效期	10500 台北市信義區
認證費用	96000
認證類別	2.3GP、2.5GP、2.8GP、3.0GP
認證項目	1600
認證費用	3000

聯發科 1x20GP 1x40GP 晶片 認證證書  
聯發科 1x20GP 1x40GP 晶片 認證證書

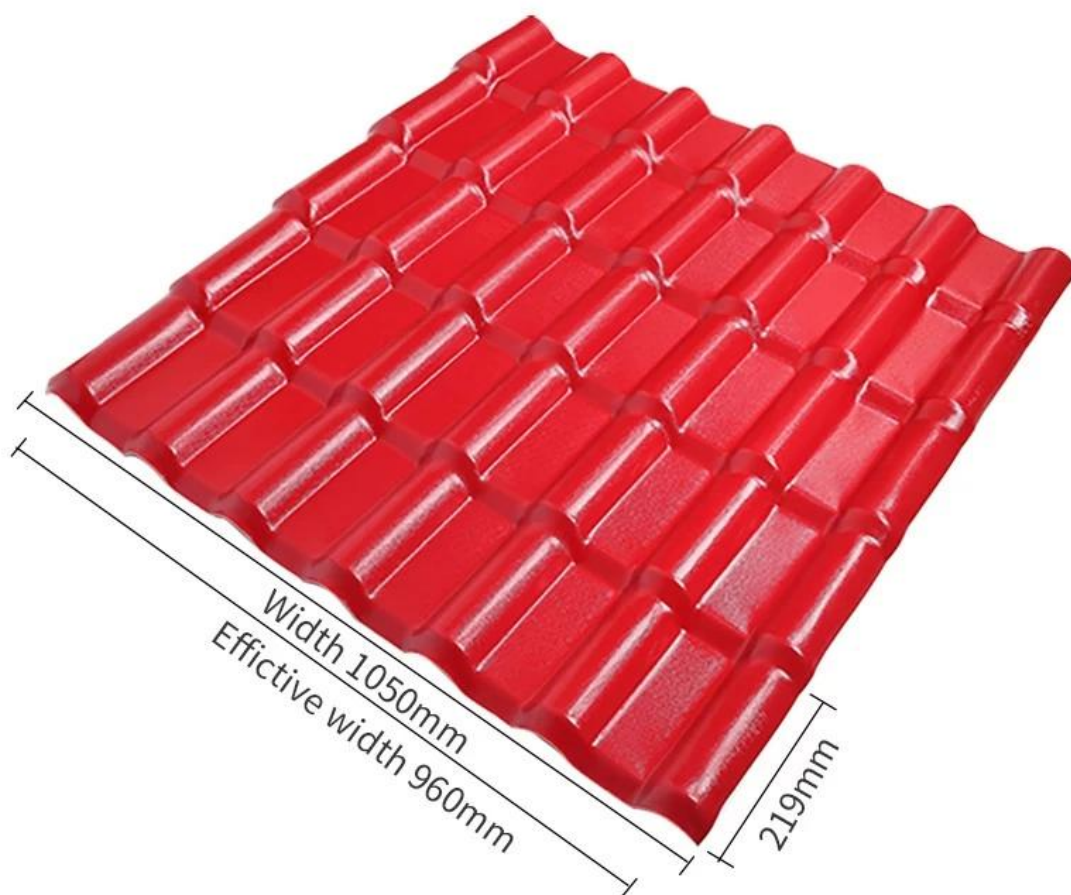

Name: synthetic resin

Model:1050mm

Material: synthetic resin

Origin: Foshan, Guangdong

Thickness: 2.5-3.0mm

Applicable scenarios: villa roofs, tourist attractions, rural transformation

## Synthetic resin roofing tile color card selection

customized any color



Brick red



Purplished red



Dark green




Gray



Blue

# Roofing accessories

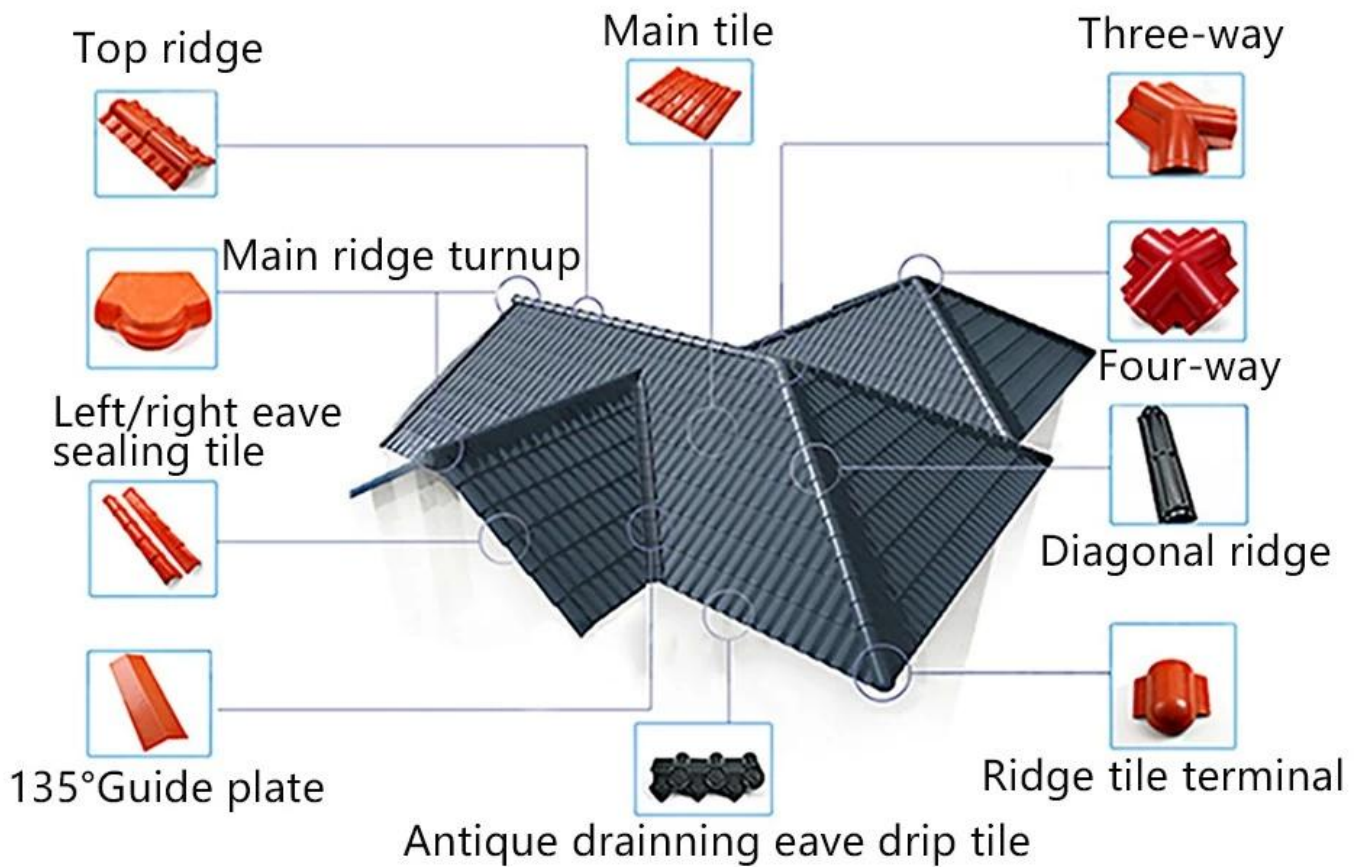


## Installation considerations

1. The purlins can use square pipe (60x40x3mm)
2. The purlins can use C-shaped steel (100x50x20x3mm)
3. The purlins can use anti-corrosion wood square (60x40mm)
4. purlin spacing of 660mm

# Dimensional measurement method


## both sides

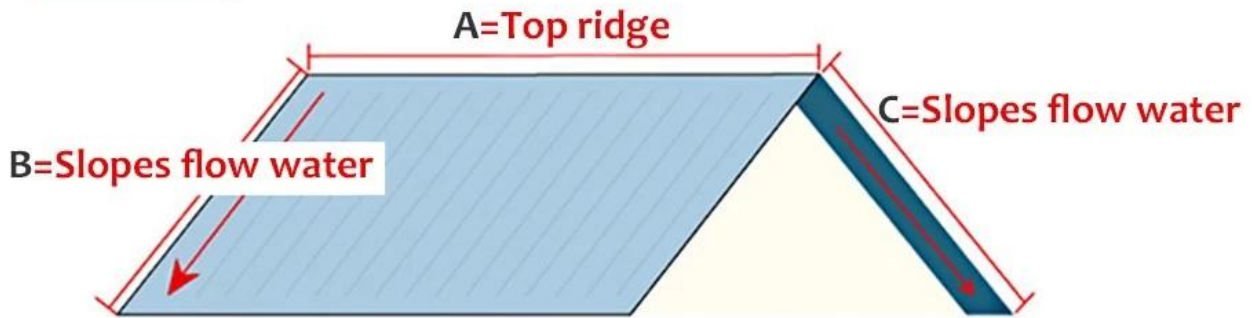

1. Measure the dimension of the **A** top ridge.
2. Measure the dimensions of **B**
3. Measure the dimensions of **C**

Measure all the dimensions (don't forget the eaves)

## four sides

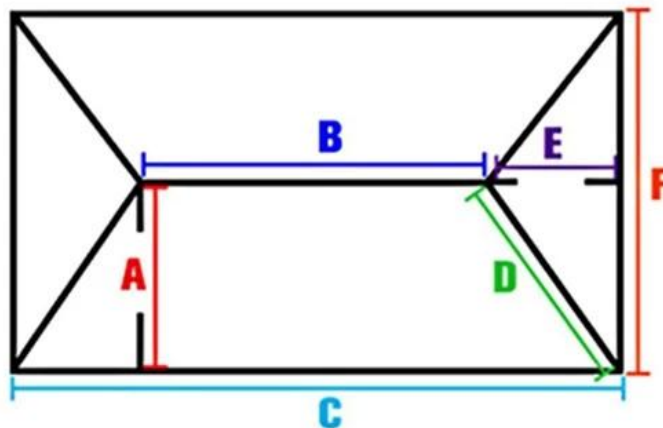

1. Measure the dimension of the **B** top ridge.
2. Measure the dimensions of ramp **A**
3. Measure the width of **C**
4. Measure the dimensions of the **D** diagonal ridge.
5. Measure the dimensions of ramp **E**
6. Measure the width of **F**

Measure all the dimensions (don't forget the eaves)

# Our Factory

Zhongxingcheng New Material Co., Ltd. 佛山市众兴晟新材料科技有限公司 Foshan City, Nanhai District China  
ASA, APVC, PVC, FRP, PVC, PC



Factory display



9 production lines



Raw material warehouse





# Product comparison

Learn all about our products

Dacheng resin roofing tile

Recyclable resin roofing tiles



Brand new raw materials imported  
bright color, long service life  
30~50 years



Recycled materials, dull color, easy  
to have black spots in appearance  
very short life.



Brand new material, good  
plasticization, long service life



Recyclable material, reduced  
toughness, many impurities,  
easy to break



ASA surface thickness 0.1~0.15mm  
does not foam and does not fall off



The thickness of the surface layer of  
the film is 0.05~0.1mm, which is  
easy to blister and fall off

# Exhibition



# Certificate

# Security sense of authoritative testing

## Multiple quality inspection and testing to ensure good quality.



IOS9000 certified



China Metrology Certification



CAL certification



# Packaging



# FAQ

\* 如何包裝才能確保產品安全？

\* 如何確保產品在運輸過程中不會受潮？  
 我們提供專業的防潮包裝方案，包括使用防潮劑、密封膜等，確保產品在運輸過程中始終保持乾燥。

\* 如何確保產品在運輸過程中不會受損？

\* 我們提供專業的緩衝包裝方案，包括使用緩衝劑、木箱等，確保產品在運輸過程中不會受到損傷。

\* 請提供詳細的技術規格和產品說明書？

\* 請提供 OEM 和 ODM 的相關資訊和服務範圍？

\* 請提供相關的認證和品質保證？

\* 請提供相關的客戶參考和市場推廣策略？

\* 請提供相關的物流和倉儲服務資訊？

\* 請提供相關的付款方式和交貨時間？  
請提供相關的產品包裝和運輸要求？

\* 請提供相關的產品樣品和測試報告？

\* 請提供相關的產品價格和折扣資訊？

• 請提供相關的產品規格和尺寸？

• FOB Shipping Port: 請提供相關的港口和運輸資訊？