


**ZXC Eğimli Mahya Kiremit toptancıları - İspanyol tarzı ASA kiremit aksesuarları toptancıları**



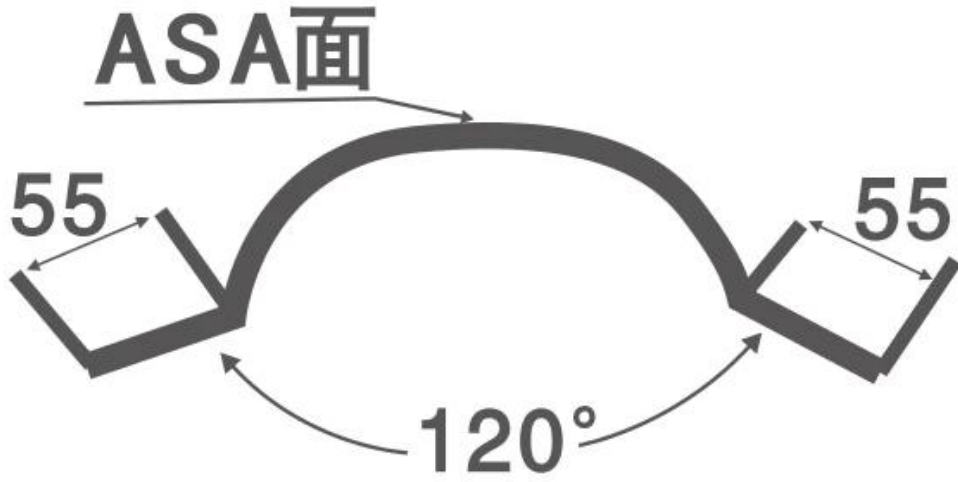

Zhongxingcheng New Material Co., Ltd., Foshan City, Nanhai District China'da yer almaktadır. Çin, ASA sentetik reçine karo, APVC korozyon önleyici kompozit karo, PVC korozyon önleyici karo, PVC lavabo, PVC levha, Şeffaf üretiminde uzmanlaşmış bir üreticidir. FRP Çatı Sayfası, PVC, PC şeffaf kiremit.

## ABOUT US



### **QUALITY, INNOVATION, STRUGGLE, WIN-WIN**

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



## PRODUCTION PROCESS



Raw Materials

1



Extrusion

2



Compression Molding

3



Cutting

4



Finished Product

5



Inspection

6


## CERTIFICATE

### ZHONGXINGCHENG

has more than 10 years experience in roof tile.



# resin roof tile accessories

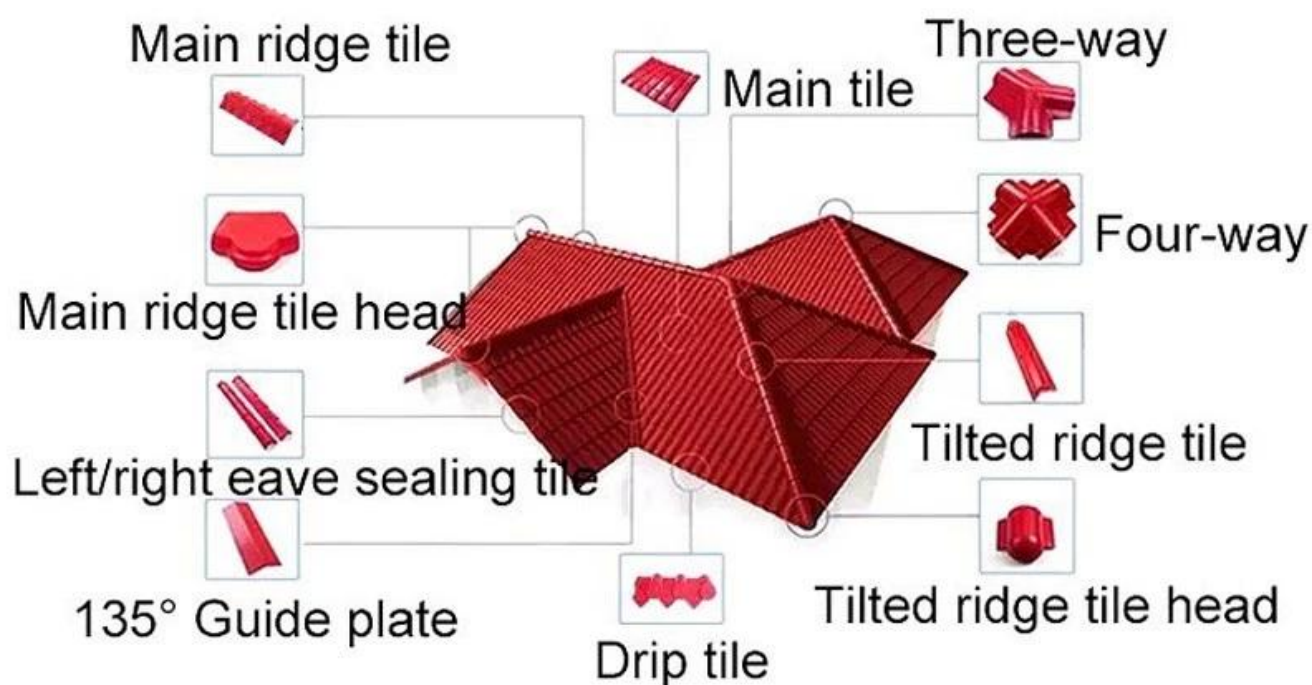

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

# Our Factory



Engineering case



# Certificate



Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	—	The color of tile should be uniform. There should be no bubble, crack or visible impurities on the surface. Edge of the tile should be clean without dirt. Warpage should be less, and tolerance on warpage.	Confirmed	Pass
2	Walk distance	mm	≤ 10	8	Pass
3	Thickness deviation	mm	± 0.2	0.02	Pass
4	Skewness	mm/m <sup>2</sup>	—	0.00	Pass
5	Flexure strength	MPa	≥ 20	30	Pass
6	Flexural modulus	%	≥ 20	30	Pass
7	Water absorption (1h, 20°C)	—	No significant change in water absorption	Confirmed	Pass
8	Acid resistance (20%, HCl, 24h)	—	No visible color change in decorative appearance	Confirmed	Pass
9	Alkali resistance (20%, NaOH, 24h)	—	No visible color change in decorative appearance	Confirmed	Pass
10	Impact resistance (1kg, 1m)	mm	≤ 10	12	Pass
11	Change index	%	≤ 0.1	0.05	Pass

Foshan Supervision Testing Centre of Quality and Metrology

Test Report

No.	Item	Unit	Requirement	Result	Remark
1	Appearance	—	The surface should be smooth with uniform coloration and no visible crack, hole, scratch, bubble, or other defect, color difference.	Confirmed	Pass
2	Surface layer thickness	mm	≥ 0.15	0.18	Pass
3	Tensile strength	MPa	≥ 20	28	Pass
4	Flexural strength	MPa	≥ 20	28	Pass
5	Flexural modulus	MPa	≥ 2000	2400	Pass
6	Skewness	mm/m <sup>2</sup>	—	0.00	Pass
7	Water absorption (1h, 20°C)	—	No significant change in water absorption	Confirmed	Pass
8	Acid resistance (20%, HCl, 24h)	—	No visible color change in decorative appearance	Confirmed	Pass
9	Alkali resistance (20%, NaOH, 24h)	—	No visible color change in decorative appearance	Confirmed	Pass
10	Impact resistance (1kg, 1m)	mm	≤ 10	12	Pass
11	Change index	%	≤ 0.1	0.05	Pass





# Packaging



## Özellik:

1. mükemmel Anti korozyon Verim
2. İyi Su geçirmez Verim
3. Ateş rezistans
4. Isı yalıtım
5. Ses ins ülasyon
6. Hava Durumu haslık, yaşlanma Rezistans

**paket:** Çıplak veya standart ihracat paket

## FAQ

### \* Üretici veya tüccar mısınız?

\* Evet, biz gerçeğiz şirket tanıtımımızda birçok resim var. Başka bir özel ürüne ihtiyacınız varsa, size yardımcı olmak için elimizden gelenin en iyisini yapacağız, böylece uzun vadeli bir iş ilişkisi kurabiliriz.

### \* Ürünü profil yapmak istiyorum ile sipariş edebilir miyim?

\* Tabii ki yapabilirsiniz, ayrıca detay isteklerinize göre ürünleri üreteceğiz.

### \* Şirketimin markasını ürünlerinize koyabilir misiniz?

\* Evet, OEM ve ODM hizmetini kabul ediyoruz. Ancak şirketiniz hakkında bazı bilgilere ihtiyacımız var.

### \* Çatı kaplama levhası nasıl kurulur?

\* Lütfen servis ekibimizle iletişime geçin, sizin için kurulum videomuz var.

### \* Piyasayı açık test etmem için numune verebilir misiniz? kalite?

\* Evet, yapabiliriz. Size ücretsiz numune sağlayabiliriz, nakliye ücretini ödeyebilir misiniz? Lütfen servis ekibimizle iletişime geçin.

### \* Ticaret süreniz nedir?

\* Ödeme: T/T %30 peşin, sevkiyat öncesi bakiye.

? Üretim Kurşun Süresi: %30 depozitodan sonra 7 iş günü içinde

? FOB Nakliye Limanı: Foshan,Guangzhou,Shenzhen