


Product show

ZXC ASA [Synthetic Resin Roof Tile](#) Wholesales, If your order matches our stock size details, we can faster delivery time.



1. A variety of raw materials by a certain percentage mixing, into the hopper
2. The mixed raw materials are pre-formed and heated to become flat tiles
3. Then through the mold pressure, after the molding, cooling, through the traction machine slowly introduced
4. To achieve the length of customer needs cut off. after artificial out

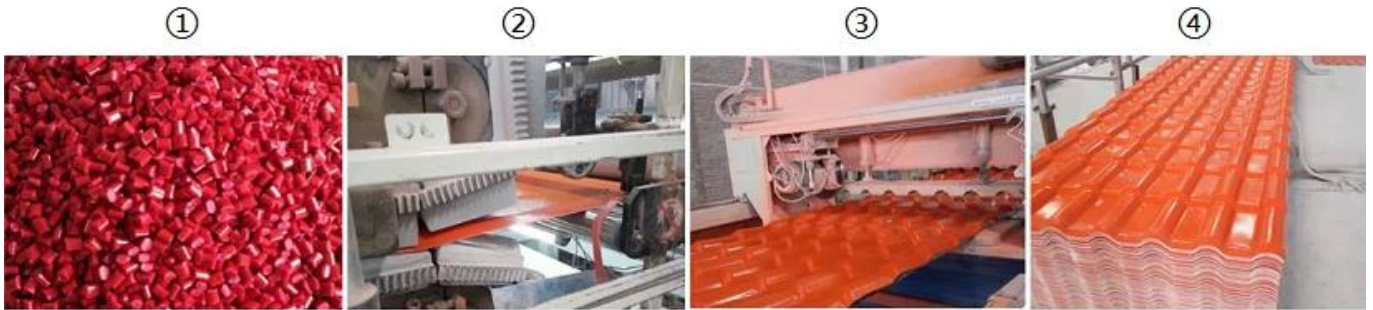



tên sản phẩm	Spanish Style ASA Roof Tile
Thương hiệu	ZXC
Nguồn gốc	Foshan city,Guangdong province,China(Mainland)
Vật chất	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
Bảo hành	25 năm
Certification	ISO9001 / SGS / CE
Số lượng đặt hàng tối thiểu	100 square meter
Thời gian giao hàng	1x20GP for 6 days,1x40GP for 7 days
Khả năng cung cấp	We have 8 produce lines,about 13500 square meter every day
Payment Terms	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,

Đang chuyển hàng	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Bưu kiện	Pallet or PE bag
Hải cảng	Guangzhou / Shenzhen / Foshan
Ứng dụng	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc

Số mô hình	#1050-160-30
Thể loại	Spanish Style
Overall Width	1050mm
Effective Width	960mm
Độ dày	2.3mm / 2.5mm / 2.8mm / 3.0mm
Chiều dài	Must be a multiple of tiết diện
Màu sắc	Orange / Red / Grey / Sky blue / Dark green/Tùy chỉnh.
Wave Spacing	160mm
Chiều cao sóng	30mm
Section Length	219mm
Purlin Spacing	660mm

More Types



Kết cấu

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Bottom: The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

Tính năng

• Long-lasting Color (at least 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

• Excellent Anti-corrosion performance

• Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.

• Good Waterproofing Performance

• Synthetic Resin Tile selects highly weather-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

• Strong Fire Resistance

• Belonging flame retardant material, with fire resistance \geq B1 as tested by national authoritative departments according to GB8624-2006 standard.

• Excellent Heat Insulating Property


• The heat conductivity coefficient is 0.325w/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore without considering adding heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• Good sound insulation

• Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

Bấm vào [ASA PVC Roof Tile Suppliers](#) để biết thêm chi tiết

resin roof tile accessories

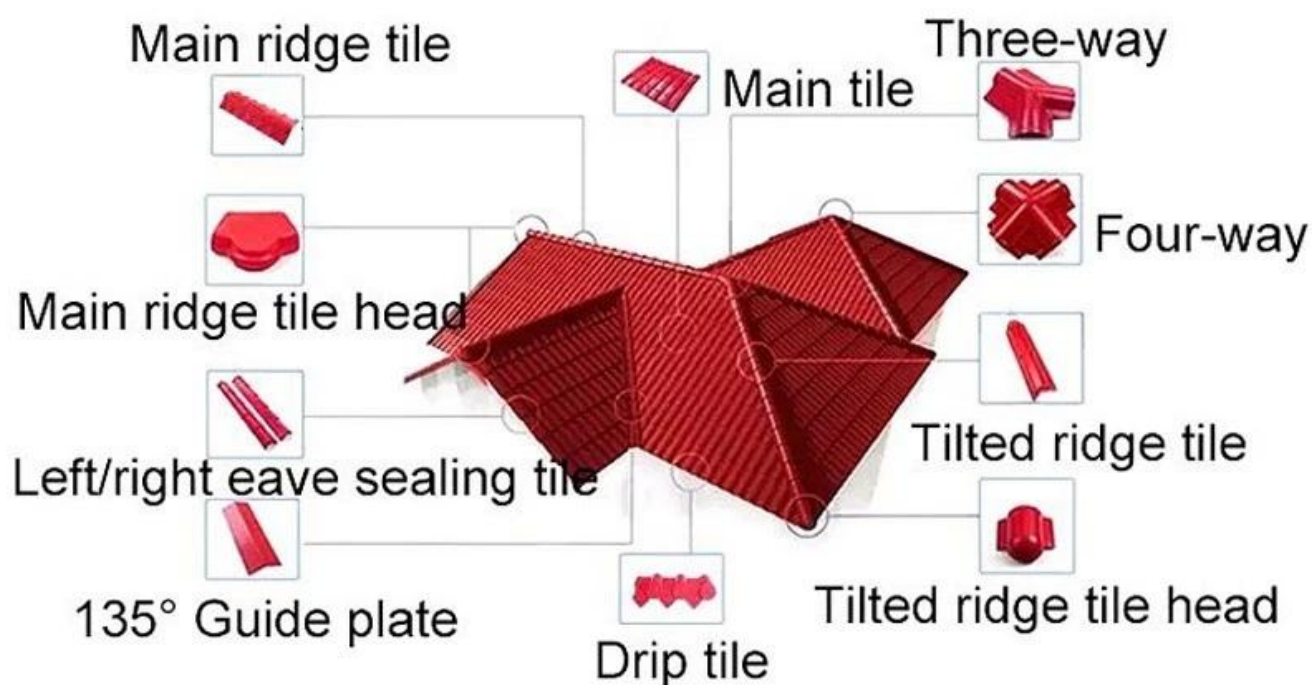

▶ Step1



▶ Step2



▶ Step3



▶ Step4



▶ Step5



▶ Step6

Our Factory



Engineering case



Certificate



Packaging



Độ dày		2.3mm	2.5mm	2.8mm	3.0mm
Trọng lượng (kg/SQM)		4.6	5.0	5.6	6.0
Container Load Capacity	20 GP (21Tons)	4500	4200	3750	3500
	40.GP (26 Tons)	5600	5200	4600	4300

Tính năng:

1. Excellent Chống ăn mòn Màn biểu diễn
2. Good Không thấm nước Màn biểu diễn
3. Fire. Sức chống cự
4. Heat. vật liệu cách nhiệt
5. Sound. INS. ời
6. Weather. lâu phai, sự lão hóa Sức cản

Bưu kiện: Khóa thân. hoặc Tiêu chuẩn xuất khẩu Bưu kiện

FAQ

*Bạn đang sản xuất hay thương nhân?

*Vâng, chúng tôi là nhà sản xuất thực sự, Có nhiều hình ảnh trong giới thiệu của công ty chúng tôi. Nếu bạn cần sản phẩm đặc biệt khác, chúng tôi sẽ cố gắng hết sức để giúp bạn, vì vậy chúng tôi có thể xây dựng mối quan hệ kinh doanh lâu dài.

*Tôi có thể đặt hàng sản phẩm với tôi muốn hồ sơ không?

*Tất nhiên bạn có thể, chúng tôi cũng sẽ sản xuất các sản phẩm theo yêu cầu chi tiết của bạn.

*Bạn có thể đặt thương hiệu công ty của tôi trên các sản phẩm của bạn?

*Có, chúng tôi chấp nhận dịch vụ OEM & ODM. Nhưng chúng tôi cần một số thông tin về công ty của

bạn.

***Làm thế nào để cài đặt tấm lợp?**

*Vui lòng liên hệ với nhân viên dịch vụ của chúng tôi, chúng tôi có video cài đặt cho bạn.

***Bạn có thể cung cấp các mẫu để tôi mở thị trường và kiểm tra phẩm chất?**

*Có, chúng tôi có thể cung cấp các mẫu miễn phí cho bạn, bạn có thể trả chi phí vận chuyển không? Vui lòng liên hệ với nhân viên dịch vụ của chúng tôi.

***Thuật ngữ thương mại của bạn là gì?**

* Thanh toán: T / T trước 30%, số dư trước khi giao hàng.

- Thời gian sản xuất: Trong vòng 7 ngày làm việc sau 30% tiền gửi
- Cảng vận chuyển FOB: Phật Sơn, Quảng Châu, Thâm Quyển