

# Product show



1.A variety of raw materials by a certain percentage mixing, into the hopper



2. The mixed raw materials are pre-formed and heated to become flat tiles



3. Then through the mold pressure,lastic the molding, cooling, through the traction machine slowly introduced



4.To achieve the length of customer needs cut. after artificial out

tên sản phẩm	Spanish Style ASA Roof Tile
Nhãn hiệu	ZXC
Nguồn gốc	Foshan city,Guangdong province,China(Mainland)
Vật chất	Acrylonitrile Styrene acrylate copolymer,Polyvinyl clorua, Calcium powder,other chemical materials
Bảo hành	25 năm
Chứng nhận	ISO9001 / SGS / CE
Số lượng đặt hàng tối thiểu	100 square meter
Thời gian giao hàng	1x20GP for 6 days,1x40GP for 7 days
Khả năng cung ứng	We have 8 produce lines,about 13500 square meter every day
Payment Terms	T/T , firstly pay 30% deposit,before loading container pay rest of payment L/C ,
Đang chuyển hàng	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
Bưu kiện	Pallet or PE bag
Hải cảng	Guangzhou / Shenzhen / Foshan
Ứng dụng	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc
Số mô hình	#1050-160-30
Gỗ phím	Spanish Style
Overall Width	1050mm
Effective Width	960mm

Thickness	2.3mm / 2.5mm / 2.8mm / 3.0mm
Chiều dài	Must be a multiple of tiết diện
Màu sắc	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Chiều cao sóng	30mm
Section Length	219mm

### Cấu trúc

Surface: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

Medium: The material is Polyvinyl chloride và Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.



Bottom: The important material also is Polyvinyl chloride và Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

### Tính năng

- Long-lasting Màu sắc (tối thiểu 10 years)
- The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.
- Excellent Anti-corrosion performance
- Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is common.
- Good Waterproofing Performance
- Synthetic Resin Tile selects highly weather-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.
- Strong Fire Resistance
- Belonging flame retardant material, with fire resistance  $\geq$  B1 as tested by national authoritative departments according to GB8624-2006 standard.
- Excellent Heat Insulating Property
- The heat conductivity coefficient is 0.325W/m.k, about 1/300 of clay tile, 1/50 of cement tile, and 1/2000 of thick color steel tile. Therefore without considering adding heat-preserving layer, the heat insulation and heat preservation of synthetic resin tile can still be optimized.
- Good sound insulation
- Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.





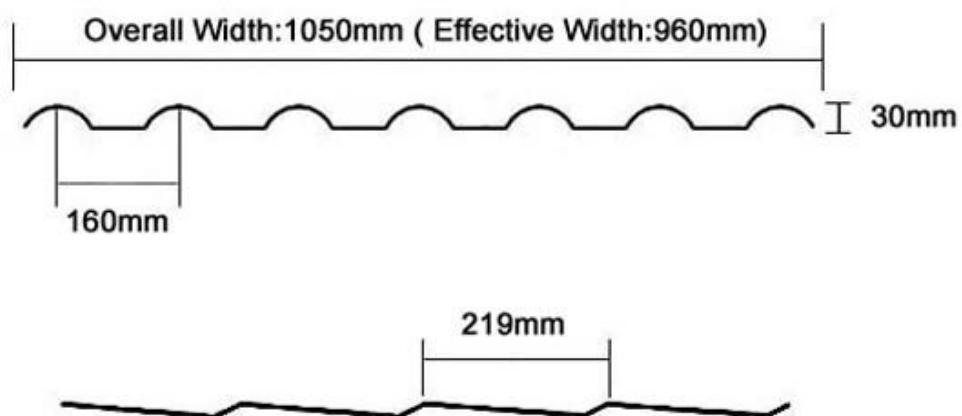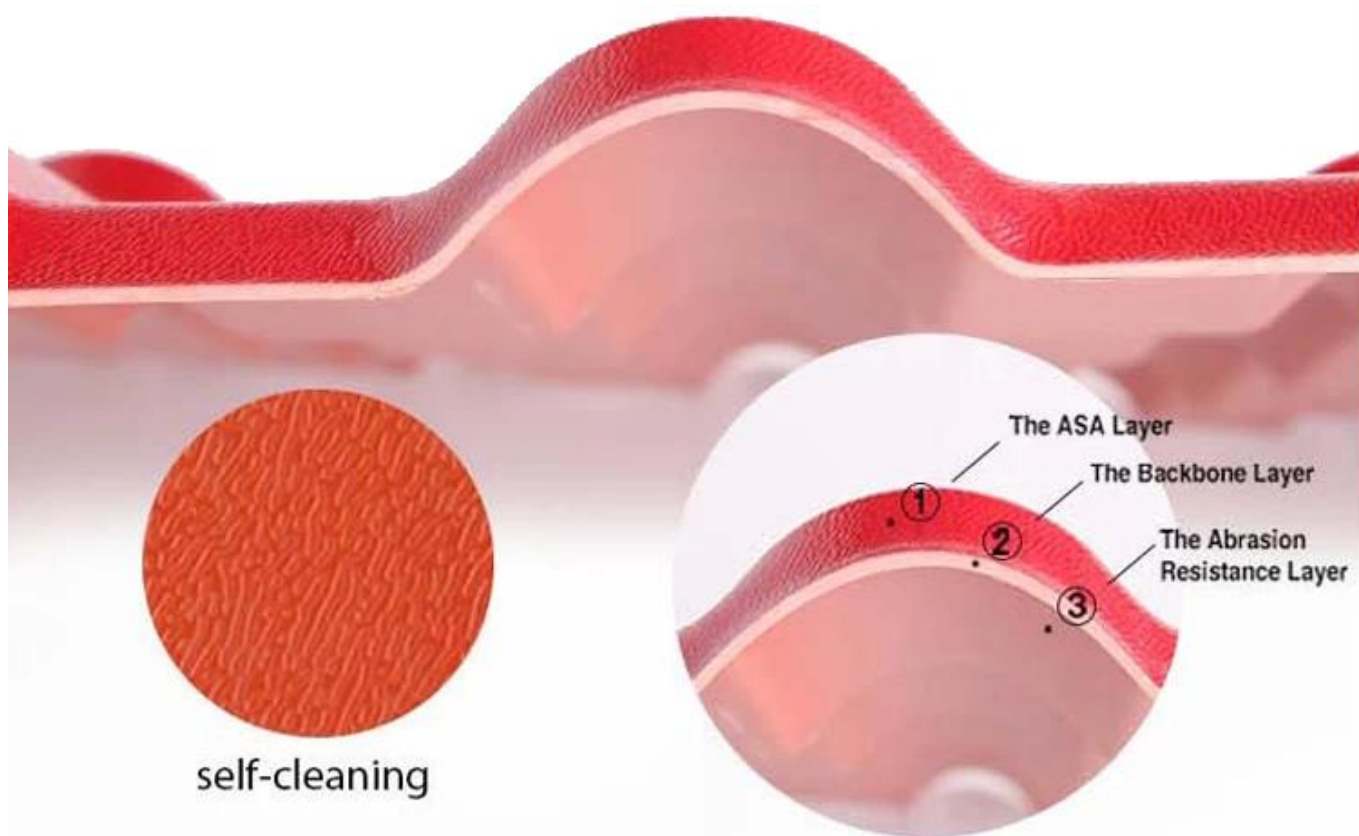

Purplish Red



Brick Red



Sky Blue









Black



Dark Green

Product name		ASA Synthetic Resin Roof Tile			
Material		ASA(Acrylonitrile Styrene acrylate copolymer)+PVC(Polyvinyl chloride)			
Type		Spanish Style			
Overall Width		1050mm			
Effective Width		960mm			
Thickness		2.3mm—3.0mm			
Length		Customized(According to the size of container)			
Color		Customized			
Purlin Spacing		660mm			
Thickness		2.3mm	2.5mm	2.8mm	3.0mm
Weight (kg/SQM)		4.6	5.0	5.6	6.0
Container Load capacity	20 GP (21 Tons)	4500	4200	3750	3500
	40 GP (26 Tons)	5600	5200	4600	4300
Feature		1.Excellent Anti-corrosion Performance 2.Good Waterproof Performance 3.Fire Resistance 4.Heat insulation 5.Sound insulation 6.Weather fastness,ageing resistance			
Package		Nude or standard export package			

Item No.	Name	Picture	Item No.	Name	Picture
1	ASA Synthetic Resin Tile		7	Main Ridge Tile Head	
2	Main Ridge Tile			Main Ridge Turnup	
3	Tilted Ridge Tile		8	Four-way	
4	Tilted Ridge Tile Head		9	Left / Right Eave Sealing Tile	
	Tilted Ridge Turnup		10	Guide Plate Tile	
5	Modern eave drip tile		11	Vertical Wall Flashing Tile	
	Antique eave drip tile		12	Screw And Hat	
6	Three-way				



# Accessories









# Certificate



# Our Factory







## Our Customer





# Packaging



## FAQ

**\*Are you manufacturer or trader?**

**\*Yes, we are real manufacturer, there are many pictures in our company introduction .if you need other special product, we will do our best to help you, so we can build a long-term business relationship.**

**\*Can I order the product with i want to profile?**

**\*Of course you can, also we will produce the products according to your detail requests.**

**\*Can you put my company's brand on your products?**



**\* Có, chúng tôi chấp nhận dịch vụ OEM & ODM. Nhưng chúng tôi cần một số thông tin về công ty của bạn.**

**\*Làm thế nào để cài đặt tấm lợp?**

**\*Vui lòng liên hệ với nhân viên dịch vụ của chúng tôi, chúng tôi có video cài đặt cho bạn.**

**\*Bạn có thể cung cấp các mẫu cho tôi để mở thị trường và kiểm tra phẩm chất?**

**\*Có, chúng tôi có thể. Chúng tôi có thể cung cấp các mẫu miễn phí cho bạn, bạn có thể trả chi phí vận chuyển không? Vui lòng liên hệ với nhân viên dịch vụ của chúng tôi.**

**\*Thời hạn giao dịch của bạn là gì?**

**\* Thanh toán: T/T trước 30%, số dư trước khi giao hàng.**

**• Thời gian dẫn sản xuất: Trong vòng 7 ngày làm việc sau 30% tiền gửi**

**• Cảng vận chuyển FOB: Foshan, Quảng Châu, Thâm Quyến**