


产品名称	Spanish Style ASA Roof Tile
品牌	ZXC
产地	Foshan city,Guangdong province,China(Mainland)
材料	Acrylonitrile Styrene acrylate copolymer,Polyvinyl chloride, Calcium powder,other chemical materials
厚度	25 毫米
认证	ISO9001 / SGS / CE / Test Report
最小起订量	100 square meter
交货期	1x20GP for 6 days,1x40GP for 7 days
生产能力	We have 8 produce lines,about 13500 square meter every day
付款方式	T/T , firstly pay 30% deposit,before loading container pay rest of payment
服务	Full Container Load (FCL) Service,We do it by myself. Less than Container Load (LCL) Service,We find our agents to do it.
包装	Pallet or PE bag
港口	Guangzhou / Shenzhen / Foshan
应用	Villa roofing,House roofing,Garden,Grange,Container house, Flat to Slope Project,Etc





Purplish Red

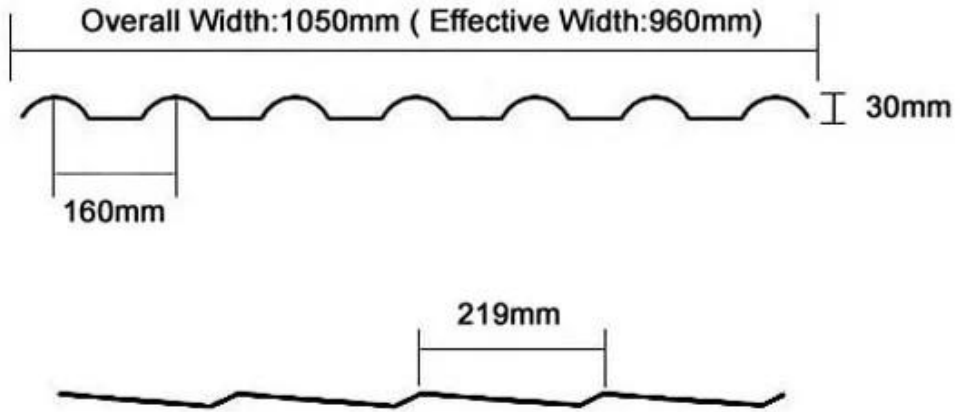

Brick Red



Sky Blue




Black



Dark Green

□□□ □□□	#1050-160-30
□□□□	Spanish Style
Overall Width	1050mm
Effective Width	960mm
□□□□□□	2.3mm / 2.5mm / 2.8mm / 3.0mm
□□□□	Must be a multiple of section
□□□□□	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Wave Height	30mm
Section Length	219mm



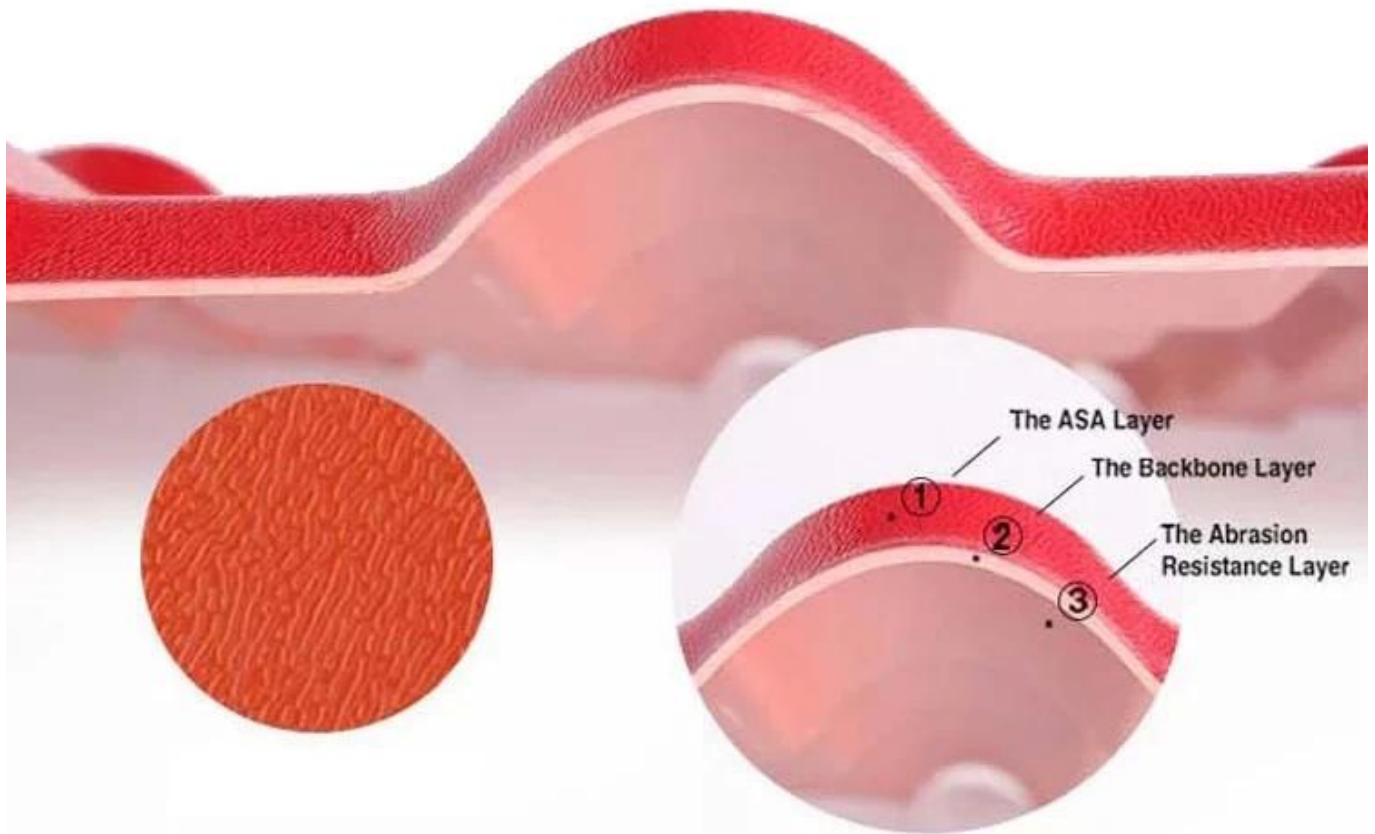

ASA

ASA: Imported ASA raw materials from the world's top 500 GE company, Super weather resistance, truly 10 years don't have color fading. The standard is that the thickness of the surface reaches 0.15mm, We can reach 0.15-0.18mm.

PVC: The material is Polyvinyl chloride and Calcium powder, the proportion is 1:1. This is the best ratio after many trials. This ratio guarantees the strength and toughness of the product.

Color: The important material also is Polyvinyl chloride and Calcium powder, but add other chemical materials. We are make the same color as the surface color and white color. Gloss of products is best in the industry.

Feature

• Long-lasting Color (at least 10 years)

• The product features ultra durability in natural environment. Even under tough conditions of exposure to UV, high temperature and freezing coldness, it still keeps stable color.

• Excellent Anti-corrosion performance

• Synthetic Resin Tile can resist longterm acid, alkali and salt corrosion, etc. Tests have proved that there would be no chemical reaction after soaking in salt and alkali and various acid under 60%. It is ideal for application in areas where acid rain is frequent.

• Good Waterproofing Performance

• Synthetic Resin Tile selects highly weater-resistant resin, which is dense and absorbing no water, with no pore penetration problem. The product is 45% wider than traditional tiles with less roof contact, so synthetic resin's waterproof performance has greatly increased than traditional tiles.

• **Strong Fire Resistance**

• Belonging flame retardant material,with fire resistance \geq B1 as tested by national authoritative departments according to GBB8624-2006 standard.

• **Excellent Heat Insulating Property**

□The heat conductivity coefficient is 0.325w/m.k,about 1/300 of clay tile ,1/50 of cement tile,and 1/2000 of thick color steel tile.Therefore without condidering ading heat-preserving layer ,the heat insulation and heat preservation of synthetic resin tile can still be optimized.

• **Good sound insulation**

Tests have proved that synthetic resin tiles have excellent noise absorption function when suffered heavy rains and strong winds.

Project Case Show





Warranty 25-years



Warranty 25-years



Warranty 25-years



Warranty 25-years

ABOUT US




QUALITY, INNOVATION, STRUGGLE, WIN-WIN

we have 8 production lines, about 100 employees, covering an area of 15,000 square meters.



PRODUCTION PROCESS

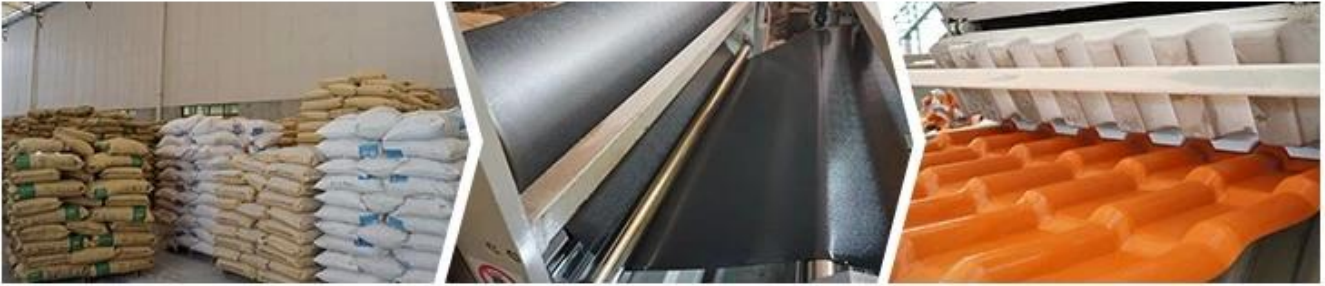

① Raw Materials

② Extrusion

③ Compression Molding



④ Cutting

⑤ Finished Product

⑥ Inspection

CERTIFICATE

Foshan Supervise Testing Centre of Quality

Test Report

No.	Item	Unit	Requirement
1	Appearance	mm	The surface should be smooth with uniform appearance and without cracks, holes, warping, bubbles, and other defects.
2	Surface layer thickness	mm	3.0±0.1
3	Flexure strength	MPa	≥20
4	Bendure stress at break	N	≥300
5	Flexural strength	MPa	≥10
6	Flexural elastic modulus	MPa	≥2200
7	Density	g/cm ³	1.3±0.02
8	Water sorption (24h)	%	≤0.10
9	Water sorption (72h)	%	≤0.15
10	Water sorption (168h)	%	≤0.20
11	Water sorption (240h)	%	≤0.25
12	Water sorption (336h)	%	≤0.30
13	Water sorption (420h)	%	≤0.35
14	Water sorption (504h)	%	≤0.40
15	Water sorption (588h)	%	≤0.45
16	Water sorption (672h)	%	≤0.50
17	Water sorption (756h)	%	≤0.55
18	Water sorption (840h)	%	≤0.60
19	Water sorption (924h)	%	≤0.65
20	Water sorption (1008h)	%	≤0.70

Foshan Supervise Testing Centre of Quality

Test Report

Client: Foshan Zhongxing Plastic Factory

Product: Plastic Tile

Model: ASA-1

Test Results: All items passed.

celab

CERTIFICATE

DECLARATION OF CONFORMITY

FOR CONSTRUCTION PRODUCTS DIRECTIVE

On behalf of FOSHAN ZHONG XING CHENG PLASTIC FACTORY

Product: Plastic Tile

Model: ASA-1

By: BEER (UK) PRODUCT SERVICE LIMITED

UK: FLAT 107, 25 INDEECOM SQUARE, LONDON, UNITED KINGDOM

CHINA: SF, Bldg E, Phase 1, 3rd Ind Zone, Xixiang Ba' An Dist, Shenzhen, China

Date of Test: Feb. 18-Mar. 18, 2016

Date of Report: Mar. 11, 2016

Report Number: B-81653176

Appendix 1

Photo of product

